

An Assessment of the State of Knowledge of East Coast Offshore Wave Climatology

DFO - Library / MPO - Bibliothèque



12042211

J.R. Wilson

W.F. Baird*

Marine Environmental Data Services Branch
Department of Fisheries and Oceans
Ottawa, Ontario K1A 0E6

March 1988

Canadian Technical Report of Hydrography and Ocean Sciences No. 63

*W.F. Baird and Associates, Ottawa.

GC
1
C37
No. 63



Fisheries
and Oceans

Pêches
et Océans

Canada

Canadian Technical Report of Hydrography and Ocean Sciences

These reports contain scientific and technical information of a type that represents a contribution to existing knowledge but which is not normally found in the primary literature. The subject matter is generally related to programs and interests of the Ocean Science and Surveys (OSS) sector of the Department of Fisheries and Oceans.

Technical Reports may be cited as full publications. The correct citation appears above the abstract of each report. Each report will be abstracted in Aquatic Sciences and Fisheries Abstracts. Reports are also listed in the Department's annual index to scientific and technical publications.

Technical Reports are produced regionally but are numbered and indexed nationally. Requests for individual reports will be fulfilled by the issuing establishment listed on the front cover and title page. Out of stock reports will be supplied for a fee by commercial agents.

Regional and headquarters establishments of Ocean Science and Surveys ceased publication of their various report series as of December 1981. A complete listing of these publications and the last number issued under each title are published in the *Canadian Journal of Fisheries and Aquatic Sciences*, Volume 38: Index to Publications 1981. The current series began with Report Number 1 in January 1982.

Rapport technique canadien sur l'hydrographie et les sciences océaniques

Ces rapports contiennent des renseignements scientifiques et techniques qui constituent une contribution aux connaissances actuelles mais que l'on ne trouve pas normalement dans les revues scientifiques. Le sujet est généralement rattaché aux programmes et intérêts du service des Sciences et Levés océaniques (SLO) du ministère des Pêches et des Océans.

Les rapports techniques peuvent être considérés comme des publications à part entière. Le titre exact figure au-dessus du résumé du chaque rapport. Les résumés des rapports seront publiés dans la revue Résumés des sciences aquatiques et halieutiques et les titres figureront dans l'index annuel des publications scientifiques et techniques du Ministère.

Les rapports techniques sont produits à l'échelon régional mais sont numérotés et placés dans l'index à l'échelon national. Les demandes de rapports seront satisfaites par l'établissement auteur dont le nom figure sur la couverture et la page de titre. Les rapports épuisés seront fournis contre rétribution par des agents commerciaux.

Les établissements des Sciences et Levés océaniques dans les régions et à l'administration centrale ont cessé de publier leurs diverses séries de rapports depuis décembre 1981. Vous trouverez dans l'index des publications du volume 38 du *Journal canadien des sciences halieutiques et aquatiques*, la liste de ces publications ainsi que le dernier numéro paru dans chaque catégorie. La nouvelle série a commencé avec la publication du Rapport n° 1 en janvier 1982.

GC
C37
#63

LIBRARY / BIBLIOTHÈQUE
FISHERIES AND OCEANS / PÊCHES ET OCÉANS
OTTAWA, ONTARIO, CANADA
K1A 0E6

Canadian Technical Report of
Hydrography and Ocean Sciences 63

March 1988

AN ASSESSMENT OF THE
STATE OF KNOWLEDGE OF
EAST COAST OFFSHORE WAVE TECHNOLOGY

by

J.R. Wilson
W.F. Baird

Marine Environmental Data Services Branch

Department of Fisheries and Oceans

Ottawa, Ontario

K1A 0E6

Correct citation for this publication:

Wilson, J.R. and W.F. Baird. An assessment of the state of knowledge of cost coast offshore wave technology. Can. Tech. Rep. Hydrogr. Ocean Sci. 63:158pp

© Minister of Supply and Services 1988
Cat. No. Fs 97-18/7E ISSN 0711-6764

ABSTRACT

This report assesses the availability and adequacy of the wind generated wave data required by the oil and gas industry, including design organizations, owners or operators, classification societies, regulatory agencies and research organizations for the development, design, construction and operation of structures to be used in the activities of exploratory and delineation drilling in waters off the East Coast of Canada.

It is found that the minimum requirements of the design, owner, classification and regulatory organizations for wave data are well defined in the available literature and that if these data are available safe and efficient design of structures and associated operations are expected.

It is concluded that the required data are not available throughout the study area. Reliable estimates of the required extreme wave conditions may only be available for the Hibernia area and even with these data there are some concerns. Throughout the remainder of the study area data suitable for the estimation of extreme events do not exist. Wave climate statistics suitable for the analysis of operations may exist for some locations in the southerly part of the study area, although limitations of these data are also identified. An important requirement identified, is the need for simultaneous observations or predictions of waves, currents and winds. It is not clear that this requirement has been adequately addressed over the study area. The availability of current and wind data is the subject of other reports and has not been examined here.

The future sources of wave data and information on extremes and wave climate are examined and conclusions are drawn. It is concluded that in the near future these data will continue to be developed using traditional techniques. However, improved advanced instrumentation and improved hindcast models better suited to the requirements of the various parts of the study area must be developed and implemented.

Satellite and other remotely sensed data will begin to become available within the next decade in useful quantities and will immediately begin to be useful for operations through improved forecasting. However these additional data will not improve the knowledge of wave climate and extremes for a number of years until a significantly increased database has been accumulated.

The present practice of developing knowledge of wave climate and extreme conditions in the study area is examined. It is noted that this knowledge is now acquired by an accumulation of information from many independent studies which are generally of insufficient scope and not fully co-ordinated with other programs. These studies tend to raise more questions than they answer and often disagree with each other. It is concluded that there is a need to develop joint programs between all interested parties to organize, prioritize and carry out the studies to acquire the necessary wave information in the study area.

RÉSUMÉ

Le présent rapport évalue la disponibilité et la pertinence des données sur les vagues soulevées par le vent nécessaires dans l'industrie pétrolière et gazière pour les organismes de conception, les propriétaires ou exploitants, les sociétés de classification, les organismes investis d'un pouvoir de réglementation et les organismes de recherche pour la mise au point, la conception, la construction et l'exploitation des ouvrages qui doivent être utilisés pour les activités d'explorations et les forages de délimitations dans les eaux au large de la côte Est du Canada.

On constate, pour ce qui est des données sur les vagues, que les exigences minimales des organismes de conception, des propriétaires, des organismes de classification et des organismes investis d'un pouvoir de réglementation sont bien définies dans la documentation disponible et que, lorsque ces données sont disponibles, elles sont un gage de sécurité et d'efficacité pour la conception des ouvrages et des travaux connexes.

On conclut que les données nécessaires ne sont pas disponibles pour l'ensemble de la région d'étude. Les estimations fiables des conditions extrêmes de vagues peuvent n'être disponibles que pour la région d'Hibernia et même lorsque ces données sont disponibles, des préoccupations peuvent exister. Pour le reste de la région d'étude les données convenant à l'estimation des situations extrêmes n'existent pas. Pour certains endroits de la partie sud de la région d'étude, il peut exister sur le régime des vagues des statistiques pertinentes pour l'analyse des travaux quoique l'on a également identifié des limites quant à ces données. Une des exigences importantes mises en lumière a été le besoin d'observations ou de prévisions simultanées sur les vagues, les courants et les vents. Il n'est pas évident que cette exigence soit convenablement satisfaite dans toute la région d'étude. La disponibilité des données sur les courants et les vents fait l'objet d'autres rapports et n'a pas été envisagée dans le cadre du présent rapport.

On a examiné les sources futures de données sur les vagues et de renseignements sur les conditions extrêmes et le régime des vagues et des conclusions sont présentées. L'on en conclut que dans un avenir rapproché ces données seront encore obtenues au moyen des méthodes classiques. Toutefois, on doit mettre au point et mettre en oeuvre des instruments perfectionnés et améliorés ainsi que des modèles améliorés de prévisions à posteriori mieux adaptés aux exigences des diverses parties de la région d'étude.

Les données obtenues par satellite et par d'autres méthodes de télédétection commenceront à devenir disponibles en quantités utiles au cours de la prochaine décennie et seront immédiatement utilisées pour les travaux en raison des améliorations qu'elles permettent au niveau des prévisions. Ces données additionnelles ne permettront toutefois une amélioration de la connaissance du régime des vagues et des conditions extrêmes qu'après un certain nombre d'années lorsque la base de données aura été sensiblement augmentée.

On examine la méthode actuelle d'obtention de connaissances sur le régime des vagues et les conditions extrêmes dans la région d'étude. Il est souligné que ces connaissances sont actuellement obtenues par accumulation de renseignements provenant d'un grand nombre d'études indépendantes qui son généralement d'une envergure insuffisante et non parfaitement coordonnées avec les autres programmes. Ces études on tendance à soulever plus de questions qu'elles ne fournissent de réponses et se contredisent souvent les unes les autres. L'on en conclut que toutes les parties intéressées doivent élaborer des programmes conjoints, afin d'organiser et d'effectuer dans l'ordre des priorités, les études visant l'acquisition des renseignements nécessaires sur les vagues dans la région d'étude.

The material in this report was developed by the Marine Environmental Data Service (MEDS) on behalf of the Royal Commission on the Ocean Ranger Marine Disaster. The report served as input to the deliberations of the Commission and in no way reflects the opinions of the commission. The conclusions drawn are solely the responsibility of MEDS.

The report contains a number of charts and tables which depict design criteria, such as the 100 year return period wave. These values were computed for demonstration purposes using available data sets with known limitations and therefore are not to be used for design puposes.

TABLE OF CONTENTS

	<u>Page</u>
1.0 Introduction	
1.1 Background	1
1.2 Objectives	3
1.3 Overview of the Report	3
1.4 Acknowledgements	4
1.5 Other Publications	4
2.0 Requirements for Wave Data	
2.1 An Introduction to Wind Generated Waves	5
2.1.1 General Discussion	5
2.1.2 Methods of Analysis	6
2.1.3 Short-Term Wave Statistics	7
2.1.4 Storms	8
2.1.5 Long-Term Wave Statistics	8
2.1.6 Non-Conventional Wave Events	10
2.1.7 Other Forms of Waves	10
2.2 Organizations Requiring Wave Data	11
2.2.1 Design Organizations/Fabricators	11
2.2.2 Owners of the Drilling Structure	11
2.2.3 Classification Societies	11
2.2.4 Regulatory Agencies	12
2.2.5 Research Organizations	13
2.3 Summary of Requirements for Wave Data	14
2.4 Interviews with Representative Organizations	17

	<u>Page</u>
2.5 Currents and Winds	22
2.5.1 Design	22
2.5.2 Operations	23
2.5.3 Current and Wave Interaction	23
3.0 Available Wave Data for Eastern Canada Study Area	
3.1 Instrumentally Measured Wave Data	24
3.1.1 Discussion of Instrumentally Measured Wave Data	24
3.1.2 Availability of Instrumentally Measured Wave Data	26
3.1.3 Assessment of Instrumentally Measured Wave Data	28
3.2 Observations by Ships Officers	29
3.2.1 Characteristics of the Shipboard Observation Data	29
3.2.2 Availability of the Shipboard Observation Data	29
3.2.3 Assessment of the Shipboard Observation Data	29
3.3 METOC Wave Data	34
3.3.1 Characteristics of the METOC Wave Data Set	34
3.3.2 Availability of the METOC Wave Data	35
3.3.3 Assessment of the METOC Data	35
3.4 NMIMET Procedure	40
3.4.1 Characteristics of the NMIMET Procedure	40
3.4.2 Availability of the NMIMET Data	40
3.4.3 Assessment of the NMIMET Analysis	40
3.5 Hindcast Wave Data	41
3.5.1 SOWM Hindcast	42
3.5.2 WIS Hindcast	47
3.5.3 MEDS Hindcasting System	48

	<u>Page</u>
3.5.4 Oceanweather Inc. Hindcast for Mobil Canada Ltd.	49
3.5.5 Group Five Hindcast for Total Eastcan	51
3.5.6 Public Works Canada Hindcast	51
3.5.7 AES Hindcast in Lancaster Sound	52
3.6 Comparisons of the Existing Data	53
3.7 Discussion of Extreme Value Analysis	60
3.8 Summary by Area	65
3.9 Findings and Conclusions	68
3.9.1 The Requirements for Wave Data and the Availability and Adequacy of Data in the Study Area	68
3.9.2 Future Requirements for Wave Data and for Studies	70
3.10 Organizations Obtaining and Archiving Wave Data in Canada	72
 4.0 Wave Data for the North Sea	
4.1 Recorded Wave Data	75
4.2 Hindcast Wave Data	75
4.3 Visual Observations	75
4.4 Extreme Wave Conditions	75
4.5 Conclusion	76
 5.0 Special Study Areas	
5.1 The Shallow Water Transformation of Waves	77
5.2 Non-Conventional Wave Events	83
5.2.1 Wave Asymmetry	83
5.2.2 Wave Breaking	83
5.2.3 Wave Grouping	84
5.2.4 Freak Waves	84

	<u>Page</u>
5.2.5 Three-Dimensional Sea-States	84
5.2.6 Conclusion	85
5.3 Future Sources of Wave Data	85
5.3.1 Advanced Instrumentation	85
5.3.2 Applications of Airborne or Satellite Remote Sensing to Wave Data Collection	86
5.3.3 Land Based Radars	89
References	90

LIST OF ACRONYMS

ABS	-	American Bureau of Shipping
AES	-	Atmospheric Environment Service
API	-	American Petroleum Institute
BIO	-	Bedford Institute of Oceanography
CARD	-	Cardone (refers to Mobil Oil hindcast point)
CODAR	-	Coastal Ocean Dynamics Radar
COGLA	-	Canada Oil and Gas Lands Administration
DND	-	Department of National Defence
DnV	-	Det norske Veritas
DOT	-	Department of Transport
DPW	-	Department of Public Works
DSS	-	Department of Supply and Services
ESRF	-	Environmental Studies Revolving Fund
GEOS-3	-	Geodynamic Experimental Ocean Satellite
HRS	-	Hydraulic Research (Station) Ltd. (Wallingford, U.K.)
IMO	-	Intergovernmental Maritime Organization
IOS	-	Institute of Oceanographic Sciences (U.K.)
JONSWAP	-	Joint North Sea Wave Program
MEDS	-	Marine Environmental Data Service
METOC	-	Meteorology and Oceanography (Centre)
MODU	-	Mobil Offshore Drilling Unit
NMI	-	National Maritime Institute (U.K.)
NMIMET	-	Name of NMI wave analysis
NOAA	-	National Oceanic and Atmospheric Administration (U.S.)
NORSWAM	-	North Sea Wave Model
NRC	-	National Research Council (Canada)

NROSS - Navy Remote Ocean Sensing System

OERD - Office of Energy Research and Development

PIANC - Permanent International Association of Navigation Congress

PILP - Program for Industry/Laboratory Projects

SEASAT - First U.S. Oceanographic Satellite

SOWM - Spectral Ocean Wave Model (U.S. Navy)

TOPEX - Ocean Topography Experiment

UBC - University of British Columbia

WES - Waterways Experiment Station (U.S. Army Corps of Engineers)

WIS - Wave Information Study (by U.S. Corps of Engineers)

1.0 INTRODUCTION

1.1 Background

The study reported in this document has been carried out on behalf of the Royal Commission on Ocean Ranger Marine Disaster by the Marine Environmental Data Service (MEDS) of the Department of Fisheries and Oceans. The study relates to the second term of reference of the Commission, which was to

Inquire into, report upon and make recommendations with respect to:

- a) *both the marine and drilling aspects of practices and procedures in respect of offshore drilling operations on the Continental Shelf off Newfoundland and Labrador and without restricting the generality of the foregoing, the matters referred to in paragraphs 1. (a) to 1. (e) *as they relate to other drilling units conducting marine and drilling operations on the Continental Shelf off Newfoundland and Labrador; and*
- b) *to the extent necessary and relevant, such practices and procedures in other Eastern Canada offshore drilling operations.*

To address this second term of Reference, the Commission undertook a study program the goal of which was:

"TO IDENTIFY PRACTICAL MEANS OF IMPROVING THE SAFETY OF EASTERN CANADA OFFSHORE DRILLING OPERATIONS."

The study area is Eastern Canadian Offshore (see Figure 1.1) extending from the shoreline to the limits of jurisdictional claims. The area extends from the Canada-US boundary north to the limit of areas which will be serviced from East Coast ports and use marine drilling systems (approximately 75°N).

The subject of study is offshore exploration and delineation drilling operations, including service and supply (marine and air) activities.

Paragraph 1. (a) is in the first term of reference and refers specifically to the "design construction and stability of the OCEAN RANGER and its suitability to conduct marine and drilling operations on the Continental Shelf off Newfoundland and Labrador."

Paragraphs 1. (b) to 1. (e) are unrelated to a study of wave climatology.

The complete terms of reference of the Commission are included as Appendix D.

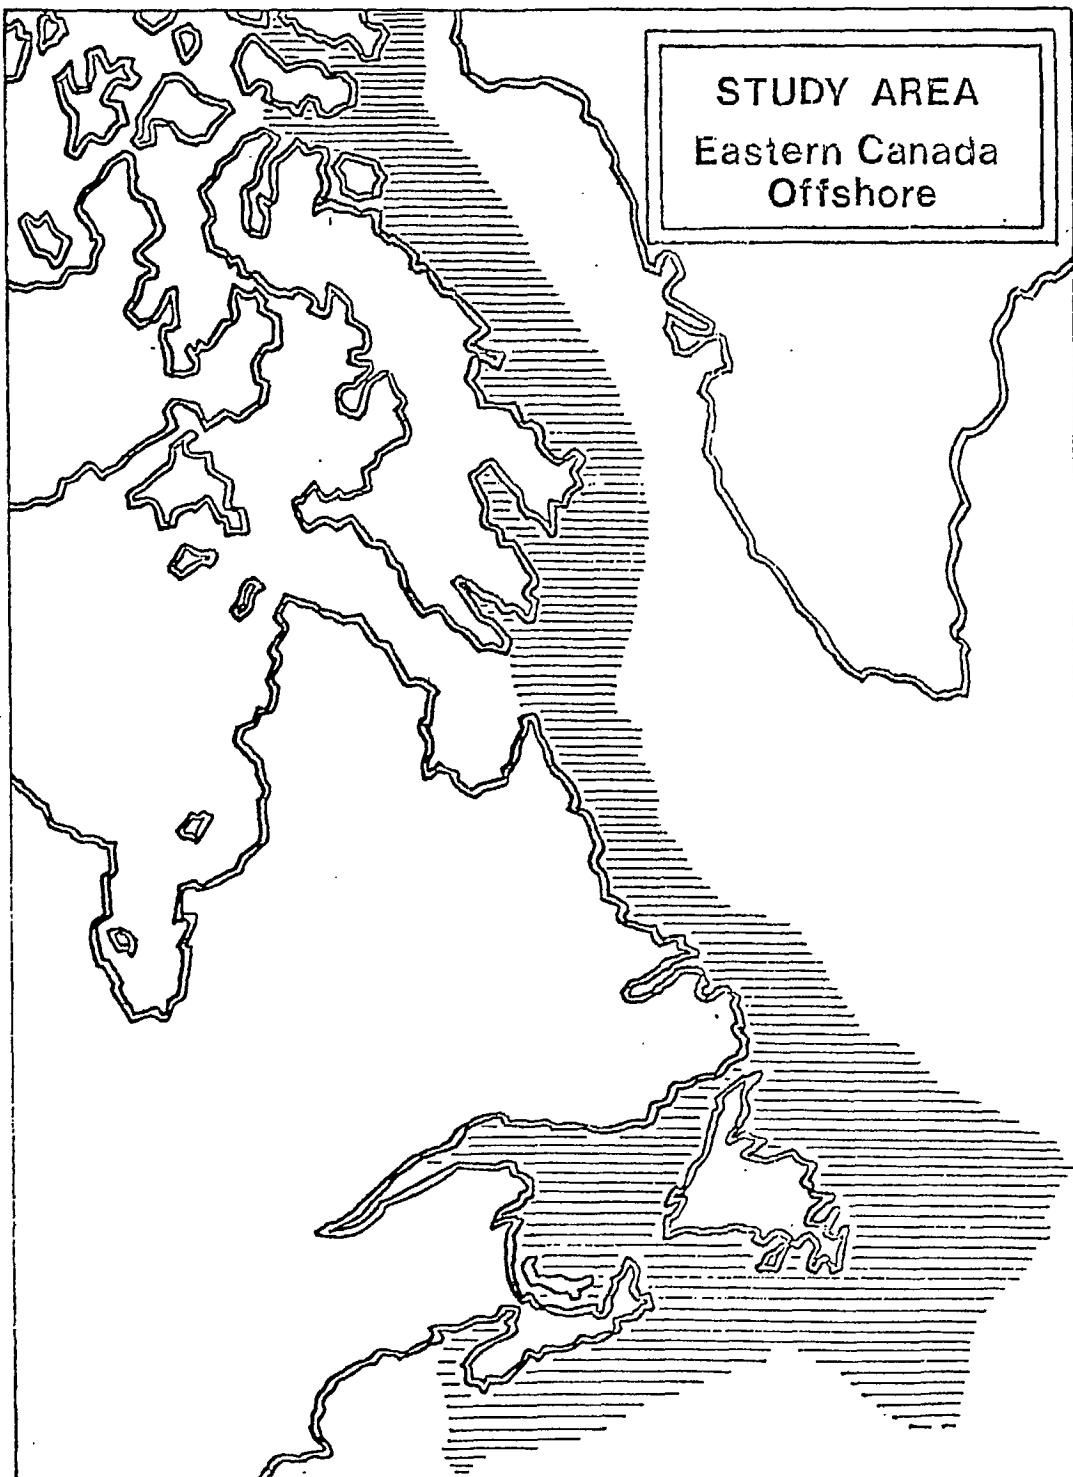


Figure 1.1 Study Areas

1.2 Objectives

The present study is one of many, each addressing a particular subject areas of importance to the activities of exploratory and delineation drilling on the East Coast of Canada.

The purpose here was to produce a state of the art assessment of wave climate knowledge for the study area. The following goals were established.

- a) Produce a description of the wave data and information available for each geographic area for design, regulation and planning of operational strategies.
- b) For each geographical and subject area, synthesize and compare the various relevant datasets and derived parameters, and discuss the adequacy or inadequacy of the results in terms of the state of the art in wave climatology and the requirements for design and operations.
- c) Describe the various techniques used to extrapolate to long return period events, and discuss the adequacy of the database and the scientific knowledge to the task of extrapolating.
- d) Compare the information and scientific and technical knowledge available to that required for design and operations, and discuss the implications of shortcomings.
- e) Draw conclusions where possible on the availability of data, information and knowledge.
- f) Identify future study needs.

1.3 Overview of the Report

To present a volume of diverse technical material in a fashion to ease its digestion by the reader is never easy. We have attempted a certain organization here and it is hoped that it is at least logical to the reader.

Section 2 discusses the requirements for wave data. It begins with a brief overview and discussion of wind generated waves, which are the subject of the study. It goes on to discuss who needs wave data and why. Not surprisingly, it turns out that high on the list of people requiring wave data are design houses, oil companies that are operating the structures, classification societies and regulatory agencies. It therefore became necessary to devote some discussion to design, certification and regulatory procedures and to reproduce some of the rules, guidelines and regulations here. The discussion is given in sections 2.3 and 2.4 primarily. Appendix A contains the rules, guidelines and regulations pertinent to wave climatology.

Section 3 contains the discussion of the available data for the study area, its characteristics and assessment. Section 3 also contains an overview of extreme value analysis procedures and the conclusions of the study.

Section 4 is a brief discussion relating the Canadian situation to the North Sea experience to identify major differences in the approach to the development of wave climate knowledge.

Section 5 reviews several of special study areas such as wave in shallow water, non-conventional wave events and future sources of wave data.

The conclusions were placed in section 3 since the major conclusions related to sections 2 and 3.

1.4 Acknowledgements

MEDS is not expert in the engineering applications of waves in the design and operation of offshore structures. The firm of W.F. Baird and Associates was therefore engaged on a major subcontract to assist with those aspects of the study. MEDS gratefully acknowledges their advice and counsel and assistance with the preparation of the report.

In the process of carrying out the work reported here there was a substantial data analysis task. More than 2 million wave spectra were processed and a few thousand tables and maps were generated to provide the data to plot the diagrams and maps in section 3. Several months of dedicated work by Tracey Dougherty and Tom MacLeod of MEDS are acknowledged with thanks.

The typing of the manuscript and equations at the last minute and under the pressure of a passed deadline by Ruth McGarry, Marg Johnstone and Dolores Swift of MEDS is also acknowledged with thanks.

A number of organizations were contacted during the course of this study and they provided a significant contribution through meetings and correspondence. These organizations are noted in section 2.4 and their input is gratefully acknowledged.

Finally the financial support to the project by the Royal Commission and the Office of Energy Research and Development is noted with appreciation.

1.5 Other Publications

As stated in section 1.4 above several thousand tables and diagrams of wave characteristics for the various datasets were produced in carrying out the study. It is the intention of MEDS to publish this information in a data report.

2.0 REQUIREMENTS FOR WAVE DATA

2.1. An Introduction to Wind Generated Waves

2.1.1 General Discussion

A wind generated wave field propagating over the oceans is an extremely complex phenomenon which is not well understood and can only be described by numerical methods that involve many simplistic assumptions.

The intent of this brief overview is to provide an introduction to the problem of adequately describing waves for engineering purposes. This is followed by a brief introduction to methods of analyzing wave records and a discussion of conventional wave statistics. A glossary of the wave terminology used in this report is included in Appendix B.

Waves are formed by a complex process of wind turbulence acting on the water surface, and their growth is governed by a transfer of energy from the wind to the water. The height of the waves may be limited by the wind velocity, the time that the wind blows, or the distance (fetch) over which the wind blows. The generation process produces an irregular distribution of wave heights and periods. Since the wind speed and direction will also be changing with time the resulting sea-state has a very irregular appearance that cannot be simply described. Waves that move out of the generating area tend to form into longer period and long crested waves of almost constant height, and are known as swell.

A wave to an observer is only the shape of the ocean surface that results from the complex, but generally circular, motion of the water particles below the surface. There is almost no mass movement of water associated with the propagation of waves except when a wave breaks. A piece of wood floating on the surface follows a circular path in a vertical plane, for example. The diameter of the circle is equal to the wave height and the time required to complete the circle is the wave period.

Careful observation of the surface of the ocean in deepwater during a storm will lead to the following conclusions:

- An individual wave is not permanent. It slowly increases in height and then decreases as the wave moves forward. The height of such a wave does not remain constant with time and the wave is said to be dispersive.
- Wind generated waves do not all move in the same direction, although the direction of movement of locally generated wind waves will usually be limited to a sector in the order of 90 degrees.
- Waves are generally either short crested or long crested. Short crested waves are associated with a wave field containing waves travelling in a range of directions and long crested waves are generally associated with swell.
- The slope, or steepness, of the leading side of the wave may be steeper than that of the rear side of the wave.

- The crest of the wave may be unstable or the front slope too steep which produces a cap of white foam or a mass of water moving down the front slope of the wave at a speed faster than the velocity of the wave, a condition known as breaking.
- There is considerable variation in the height and period (or wave length) of the waves in the sea-state. In very severe sea-states wave heights may reach 40 metres, wave periods reach 18 seconds, and wave lengths 500 metres or more. Swell waves may have even longer periods or wave lengths, but the wave height will not be as large.

When considering the visual appearance of waves in a severe sea-state it is important to note that for many engineering procedures it is not the shape of the sea surface that is important. It is the movement (i.e. displacement, velocity, and acceleration) of the water mass below the surface that produces loads on a structure and this movement must be accurately described to calculate the forces on the structure.

Many mathematical theories or formulations exist to describe the surface profile, and the displacement velocity, acceleration and pressure field below the surface. The simplest theories are valid for small amplitude, long crested waves of constant height moving in a stationary water mass.

2.1.2 Methods of Analysis

The most common form of wave record is obtained by measuring the water surface elevation as it passes a fixed point. In fact the point is seldom fixed because the measuring device consists of a tethered buoy on a slack mooring. Therefore, the record consists of a trace of the vertical travel of the buoy as it rises over the wave crests and falls to the trough while moving back and forth a certain amount with the waves.

There are two basic methods of analyzing a wave record. The first consists of measuring individual waves from the record, and is referred to as a zero crossing analysis. The second involves breaking down the irregular trace into a series of sine waves of different amplitudes and periods which when added together reproduces the original wave record. This is referred to as spectral analysis. This latter method involves complex numerical procedures.

The definitions of the parameters derived from the different methods of analysis are summarized in a publication produced by the Permanent International Association of Navigation Congresses (PIANC), PIANC 1973. This glossary is reproduced in Appendix B. The principal parameters referred to in this report are as follows:

$H_{z,max}$	The maximum zero up-crossing wave height observed in a specified period of time.
$H_{1/3}$ (or H_s)	The significant wave height. The average of the highest one third of the zero up-crossing wave heights for a stated period of time.
$\bar{T}_z$	The zero-crossing wave period is an average period obtained by dividing the record duration by the number of times the water surface crosses the mean water level in one direction.

H_{mo}	The characteristic wave height = $4 \times \sigma$ (σ is the square root of the variance). This parameter is obtained from spectral analysis and is approximately equal to the significant wave height in certain conditions.
T_p	The peak period. The period at which the maximum variance spectral density occurs.
H_v	Wave height from visual observation. The average height of the larger well formed waves.
T_v	Wave period from visual observation. The average period of the larger well formed waves.

2.1.3 Short Term Wave Statistics

During the peak of a storm it is normally assumed that for a relatively short, but defined period of time, the average wave conditions do not change. This condition is referred to as stationarity and it may be assumed to last from one hour to six or more hours. This section provides a brief summary of wave statistics when wave conditions are stationary.

It is common practice to assume that the distribution of wave heights, obtained from a measured wave record follows a Rayleigh distribution of the form:

$$P(H \geq H') = \exp \left[\frac{-2H'^2}{H_s^2} \right]$$

which gives the probability that a wave height, H , equals or exceeds a selected value, H' . H_s is the significant wave height.

This distribution allows relationships between various wave height parameters to be determined, as illustrated in the following table:

	H_{mp}	H_{av}	H_s	$H_{1/10}$	$H_{1/100}$	
H_{mp}	1.00	0.80	0.50	0.39	0.30	e.g. $H_{mp} = 0.50 H_s$
H_{av}	1.25	1.00	0.63	0.49	0.38	
H_s	2.00	1.60	1.00	0.78	0.60	
$H_{1/10}$	2.55	2.04	1.28	1.00	0.76	
$H_{1/100}$	3.34	2.67	1.67	1.30	1.00	
H_{mp}	=	most probable wave height in the record				
H_{av}	=	average height of all waves				
H_s	=	significant wave height				
$H_{1/10}$	=	average height of the highest one tenth of all wave heights				
$H_{1/100}$	=	average height of the highest one hundredth of all wave heights				

Table 2.1 Some statistical relationships between wave heights

The ratio of the probable maximum wave height to an average parameter, such as the significant or characteristic wave height for a stationary sea-state, is commonly assumed to depend on the number of waves that pass the point of measurement during a given period of time. The longer the time, the greater the number of waves and the greater chance of recording a large wave. Table 2.2 provides ratios of the maximum wave height to the significant wave height as a function of the number of waves. The associated duration for a wave period of 10 seconds is also noted. The ratios are calculated using the formula

$$H_{\max} = H_s \left(\frac{1}{2} \ln N \right)^{\frac{1}{2}}$$

No. of Waves	Duration 10 sec. Period	Ratio of Most Probable Maximum Wave to Significant Height
50	8.3 min.	1.40
100	16.6 min.	1.52
500	1.4 hours	1.76
5000	14 hours	2.06
10000	28 hours	2.15
20000	56 hours	2.23

Table 2.2 Ratio of the most probable maximum wave to the significant wave height for various durations of a stationary sea-state.

2.1.4 Storms

The calculation of short-term statistics of waves is dependent on the major assumption that the event is stationary. However, storms that generate large wave events are non-stationary, often moving through an area at speeds greater than 45 km/hr. It is probable that the mean wave direction will also be changing in response to wind changes with the passage of the storm. Traditional methods of estimating extreme wave conditions do not provide information on the duration of storms. Consequently, the most probable maximum wave height associated with a storm with a return period in the order of 50 or 100 years should be a conservative estimate and should be based on a study of probable storm profiles associated with extreme events.

2.1.5 Long-Term Wave Statistics

In general, recorded wave data or recorded wind data (for hindcasting purposes) are available for only relatively short periods of time. However, for the design of structures that operate in an exposed environment, a design wave condition with a return period in the order of 50 to 100 years is required.

An extreme value analysis is a technique used to predict the frequency of occurrence of long return period events. An example would be the 100 year return period wave which can be thought of as the highest wave one would expect to experience on the average of once every 100 years. Since 100 year time series of virtually all the geophysical variables of interest do not exist, the extreme value analysis is used to extrapolate probabilities from a shorter

period of "data". Time series of wave measurements off Canada's east coast vary from one to 10 years in length. To extrapolate a 5 or 10 year data set of measured waves to a 100 year event is considered to yield unreliable results. It is reasonable to assume that one would get a more reliable prediction of the one hundred year wave if it is predicted from 30 to 50 years of data rather than 10.

The most common distributions used to describe the long-term statistics of waves are the Fisher-Tippet, Weibull and log-normal distributions. These distributions are discussed further in section 3.7.

Reliable meteorological time series of observed winds extend back to 1950 over the southern portions of the study area. It is therefore considered appropriate to use the measured wind fields to estimate wave conditions and produce a time series of wave data of 20 or 30 years duration for the extreme value analyses. This procedure is referred to as "hindcasting" waves from winds.

The relationship between the probability (or risk) of encountering an event with defined return within the design life of the structure is illustrated in Table 2.3. The design procedures referenced in Appendix A frequently refer to the use of the 100 year event (and occasionally the 50 year event) for the calculation of loadings on, or response of, the structure. This table presents the probability of encountering this event for selected design lives.

For example, a structure to be located at a point for 30 years would have a 79% chance of encountering the 20 year event and a 26% chance of encountering the 100 year event.

Encounter Probabilities

		Return Period (years)				
		20	50	100	200	1000
Design	1	.05	.02	.01	-	-
Life	5	.23	.10	.05	.02	-
(years)	10	.40	.18	.10	.05	.01
	30	.79	.45	.26	.14	.03
	50	.92	.64	.39	.22	.05

Table 2.3 Probabilities of encounter for events with various return periods as a function of design life.

2.1.6 Non-Conventional Wave Events

There are a number of aspects of wind generated waves that can be described as non-conventional, because they are not described by conventional procedures. These events include wave grouping and "freak" or "rogue" waves.

The physics which control these events is not well understood and their existence, severity or frequency of occurrence has not been adequately documented in the study area. It is therefore not possible to assess the influence of these events on the design of offshore structures.

Non-conventional events are discussed in greater detail in section 5.2 of this report.

2.1.7 Other Forms of Waves

This report deals entirely with wind generated surface waves. Other surface wave forms include tides and tsunami waves.

Tides and tidal currents result from the motion of the moon, sun and the planets and are phenomena producing very different effects than do wind generated waves because of their much longer period. Tides have two distinct effects on wind generated waves. The first effect is that the water surface is raised or lowered. Raising the water surface will bring the crests of the wind generated waves closer to the deck of a drilling unit resting on legs sitting on the sea floor. Secondly, a tidal current running against a propagating surface wind-wave causes the wave to steepen and increases its impact or drag on the structure.

Tsunamis or earthquake generated waves are generally of little concern to structures in deep water. However, they can have a devastating effect on coastal structures.

2.2 Organizations Requiring Wave Data

In the following sections, 2.2.1 to 2.2.5, the principal organizations requiring wave data in their involvement with the exploration or recovery of hydrocarbons are briefly discussed. The requirements of these organizations for wave data are discussed in sections 2.3, 2.4 and 2.5.

2.2.1 Design Organizations/Fabricators

A designer, frequently working with a fabricator requires a description of the wave climate to assist in the development of concepts for the structure and for the detailed design process. The form of the concept developed may be significantly influenced by the severity of the environment in which it must survive and operate.

In the detailed design process, a very complete description of the wave climate may be required. However, mobile drilling units are generally designed to survive and operate in a wave climate of a selected severity and not for a specific site. Many units have been designed to have an unlimited classification and operate in any area of the world. Fixed structures are designed for a specific location and for the wave climate at that location.

2.2.2 Owners of the Drilling Structure

The owner ensures that the structure has been designed for the environment in which it is to be used. To achieve this objective, the owner must have a reliable description of extreme wave, current and wind conditions at the site and must be satisfied that the structure was designed to survive these conditions.

The owner is also concerned with the environment from an operational point of view. Clearly the selected structure must be able to operate efficiently in the climate of the area. In order to design support operations and ensure adequate supplies of consumables, the operator must also have a detailed knowledge of expected downtimes due to wave and other environmental conditions. Downtime caused by waves may also be a controlling factor during installation, maintenance and removal.

In the approval and classification processes, it is the responsibility of the owner to provide the required descriptions of the wave climate, including extreme events, of the area in which the structure will operate.

2.2.3 Classification Societies

The classification society is principally concerned with survival of the structure and it will undertake a detailed review of the design. The requirements of the classification are therefore concerned with structural integrity and survival in the same manner as the design engineer.

The following description of the classification process is taken from American Bureau of Shipping 1980:

"The Classification process consists of a) the development of Rules, guides, standards and other criteria for the design and construction of marine vessels and structures, for materials, equipment and machinery,

b) the review of design and survey during and after construction to verify compliance with such Rules, guides, standards or other criteria and c) the assignment and registration of class when such compliance has been verified.

The Rules and standards are developed by Bureau staff and passed upon by committees made up of naval architects, marine engineers, shipbuilders, engine builders, steel makers and by other technical, operating and scientific personnel associated with the worldwide maritime industry. Theoretical research and development, established engineering disciplines, as well as satisfactory service experience are utilized in their development and promulgation. The Bureau and its committees can act only upon such theoretical and practical considerations in developing Rules and standards."

2.2.4 Regulatory Agencies

The Canadian oil industry is controlled by Acts of Parliament that are administered by the Canada Oil and Gas Lands Administration (COGLA).

Authority to drill in offshore areas administered by COGLA is governed by regulations and guidelines developed in part by the Offshore Structures Division.

These regulations and guidelines, for example the Canada Oil and Gas Drilling regulations (PC 1979-25 amended by PC 1980-2111), require that the operator have available a description of the environmental conditions in which a structure will operate and survive and that the structure and operating system be suitably designed.

The above noted regulations state, for example, (PART I, 8.(f),(ii)) that any person applying for a Drilling Program Approval furnish information on

"The prevailing environmental conditions in the area of the program" and "in the case of every drilling unit used or intended to be used by an applicant during the program, (i) the data and particulars on which the applicant relies to show that the drilling unit has adequate stability to safely conduct the proposed program, and (ii) the details of the structural design of the drilling unit on which the applicant relies to show that the drilling unit has strength adequate to withstand conditions of extreme loading caused by a combination of the most unfavourable functional and environmental loads".

In order to administer these regulations and guidelines COGLA or its agents must have knowledge of the wave climate of the areas where activities are taking place, in order that it may ensure that the owner or operator has submitted an adequate description of the wave climate. In some countries the regulatory agency has had guidance notes developed which contain a description of the wave climate of selected areas. Neither guidance notes nor the basic information required to compile them have been developed in Canada.

The Department of Transport (DOT), at the request of COGLA, reviews various aspects of marine safety for foreign drilling units and is responsible for

marine safety under the Canada Shipping Act. This Act governs floating structures within a twelve mile limit. DOT has developed interim standards for Mobil Offshore Drilling Units (MODUS) that are partially based on the Intergovernmental Maritime Organization (IMO) code. These standards have specific requirements for the wave, wind and current data to be used in the design and review process.

2.2.5 Research Organizations

The requirements of research organizations concerned with waves and offshore structures are different from those of the other groups.

The designer, owner, classification society or regulatory body is primarily concerned with the state of the art of design as it is published in manuals of recommended practice, in codes of practice, in classification rules and in regulations.

The research organization, in cooperation with these other organizations, is concerned with improvements to current practices, codes, rules and regulations and in undertaking the necessary research and engineering studies to support this development work. The research is intended to lead to safer, more efficient and more cost effective structures that will support the exploration and recovery of hydrocarbons. The research organization is generally working with scientists and engineers to advance theories relating to waves and to provide more complex descriptions of the sea-state.

The classification societies have research departments within their own organization and some design companies and owners employ highly qualified engineers whose role is to contribute to current research and development efforts.

2.3 Summary of Requirements for Wave Data

The requirements of the organizations described in Section 2.2 were determined by review of published reports and by discussion with representative companies (reported in Section 2.4).

The review of published reports placed emphasis on design manuals that describe procedures and methodologies accepted by the industry rather than on texts or conference proceedings that have not received review and acceptance by the industry.

The procedures and methodologies that are referenced in this report do not generally differentiate between structures used for exploration and delineation drilling and structures used for production. It appears that the industry has the same standards and requirements for both activities. This is worthy of note, as exploration activities at a single location may be completed during the less severe part of one or two years, whereas production platforms may be on location year around for tens of years.

The available reports describe procedures that cover many topics. Procedures that involve the use of wave data have been extracted and are presented in Appendix A. In this section the wave data that are required in following these procedures are summarized.

The reports referenced in Appendix A differentiate between the design of structures fixed to the ocean floor and mobile structures. For fatigue analysis or the design and assessment of operations this differentiation is not so important.

Consequently, Appendix A is divided as follows:

- A.1 Survival in Extreme Conditions
 - A.1.1 Fixed Structures
 - A.1.2 Floating Structures
- A.2 Fatigue Analysis
- A.3 Operational Assessments
- A.4 Requirements of Regulatory Agency

The design of structures to survive in extreme wave conditions may involve either deterministic or stochastic forms of analysis.

In a deterministic analysis the stress produced in components of the structure or the response to a defined wave height and period is calculated. The wave height (and associated period) used in the calculation is generally the most probable maximum wave height with a return period of 100 years.

In a stochastic analysis a probability distribution function of stress in a component of the structure or of the response of the structure to a sea state described by a wave spectrum may be calculated. The wave spectrum may also have a return period of 100 years. This wave spectrum may be determined from a study of the waves in the area. If not and if deemed appropriate, one of the standard spectral forms such as JONSWAP or Pierson-Moskowitz can be used.

In practice, the deterministic approach is frequently used for structural analysis while the stochastic approach is generally used for calculating motion response. A stochastic analysis is a calculation in the frequency domain. Analysis of structural response to irregular waves may also be completed in the time domain if the water surface profile is defined and the velocity and acceleration fields below the surface are estimated. Time domain analysis is recommended by the American Petroleum Institute (API, 1982) for calculations that are drag force dominated, as occurs with guyed towers.

Design for survival in extreme conditions may require knowledge of the most probable maximum crest elevation, with a defined return period, to ensure a wave does not impact with the upper deck of a structure. This crest elevation must be determined from a knowledge of the tidal regime and the probability of occurrence of storm surges as well as the maximum wave height.

Fatigue analysis requires information on the frequency of occurrence of stress above a threshold level during the life of the structure and therefore requires a statistical description of the wave climate rather than just a knowledge of extreme events.

Design and assessment of operations may involve a knowledge of the motion response of the structure and its support vessels, of the response of diving equipment or of the response of the structure while being towed, to give some examples. However, operational concerns all require a detailed description of the wave climate of the area where the structure will operate.

The required wave data can be summarized as follows:

For Deterministic Analysis

Most probable maximum wave height for selected return period (typically return period of 100 years).

Wave periods that are associated with the selected wave height (analysis should be undertaken for the wave period that produces the largest load on or response of the structure).

Analysis will consider lower wave heights for cases where the wave period associated with lower heights will cause larger stresses or response (than the wave periods associated with the larger waves). For structures where the orientation is fixed, it may be desirable to define these extreme wave conditions by direction.

For Stochastic Analysis

A variance spectrum for selected return period (typically return period of 100 years).

Shape or formulation of wave spectrum and peak period (or other period parameter should be varied while maintaining the same characteristic wave height (significant wave height) in order to produce largest loads or response that could occur.

Analysis will consider lower wave heights for cases where the wave periods associated with lower heights will cause larger stresses or responses.

For structures where the orientation is fixed, extreme wave conditions should be defined by direction.

Underdeck Clearance

Most probable maximum crest elevation for selected return period (typically return period of 100 years). This elevation must consider the elevation of the mean water level that is expected to occur during this event. This is influenced by the tide, atmosphere pressure, wind set-up etc.

Fatigue

Bi-variate frequency of occurrence (scatter) diagrams of wave height and period parameters by direction. These diagrams should be based on a sufficient number of years of data to reliably define the wave climate.

Design and Assessment of Operations Affected by Wave Action

The requirement is for a description of the sea-state (e.g. characteristic wave height, peak period and mean direction) at regular intervals (e.g. 3 hrs) throughout a 3 to 5 year period from which many statistical presentations (such as exceedence and persistence diagrams) can be developed. The estimate of a 3 to 5 year period is based on discussions with industry representatives and not on a statistical analysis of existing data. The requirement is to provide a reliable description of the average wave conditions.

Hydraulic Model Testing

Model testing in hydraulic laboratories are, for some designs, an important part of the design process to determine stability and motion characteristics. Typically, an instrumented model of the structure is subjected to simulated wave action in a basin. Either pressures on the model or the strain in selected members can be measured or the response of the structure can be monitored.

The requirements of model testing programs for wave data depends largely on the capabilities of the laboratory to generate waves. However, some laboratories have now developed capabilities to reproduce almost any form of defined sea-state. The scientist, engineer and instrument development companies are as a result being challenged to provide accurate, complex descriptions of the sea-states to which the structure will be exposed.

2.4 Interviews with Representative Organizations

During the course of this investigation, meetings were held with a number of organizations. The objectives of these meetings were as follows:

- to obtain an overview of the design, classification and regulatory processes as they apply to the structures used for the exploration and recovery of oil and gas.
- to identify the specific requirements of design, classification, regulatory and research organizations for wave data.
- to identify any outstanding problems associated with the design, classification and regulation of structures designed for the exploration and recovery of oil and gas that can be attributed to a lack of data or knowledge concerning wind generated waves and their effects on structures.

Meetings were held with representatives of the following organizations:

Design:

- Submarine Engineering, Aberdeen
(T. Haavie, J. Dalglish, W. Wagstaff)
- Early and Wright, San Francisco
(M.L. Griesert, M. Praught)
- National Maritime Institute Ltd., London
(N.M.I. provides an analysis service to designers)
(R. Standing, N. Hogben, L. Dacunha)

Owner:

- PetroCanada Resources
(G.T. Glazier by correspondence)

Classification:

- American Bureau of Shipping, New York
(S. McIntyre, H.H. Chen, B. Liu)
- Det norske Veritas, (Meeting in Ottawa)
(J. Gorman)

Regulation:

- Canada Oil and Gas Lands Administration, Ottawa
(R. Smith, T. Starr, F. Jackson, Y. Madsen, K. Sato, L. Muir)

Research:

- National Research Council of Canada, Ottawa
(J. Ploeg, E. Funke, G. Mogridge, E. Mansard)

- Hydraulic Research Ltd., Wallingford
(S. Huntingdon, A. Brampton, J. Weare)
- National Maritime Institute Ltd., London
(NMI also undertakes research)
(R. Standing, N. Hogben, L. Dacunha)
- Institute of Oceanographic Sciences, U.K.
(J. Ewing, L. Draper, P. Challenor, D. Carter)
- American Bureau of Shipping, New York
(The research program of ABS was reviewed with S. McIntyre, H.H. Chen, and D. Liu)

During the discussions with the various organizations it was confirmed that the industry follows the procedures summarized in section 2.3 and reported in Appendix A. Additional analyses may be undertaken, and frequently are, however, the summarized procedures represent the minimum requirements.

Similarly the wave data requirements outlined in section 2.3 also represent the minimum requirements for wave data, even though some organization may attempt to obtain more detailed information.

All organizations discussed the need for improved or additional data in Canada. The urgency with which the data should be obtained depends on the location under consideration, the type of structure and the responsibilities of the organization.

None of the design, classification or regulatory agencies identified any limitations of existing methods for obtaining wave data, of analysing wave data, or of applying wave data to design procedures that lead to unsafe structures, structures that are significantly over designed, or problems with operation of these structures.

Important research and development work in the area of wave measurement and prediction and wave-structure interaction is continuing. However, this research is not driven by a sense of urgency that disasters will occur if the work is not completed quickly.

The opinions expressed to the authors during the interviews lead us to conclude that the industry believes that the design of structures for exploration and recovery of hydrocarbons is satisfactory when measured against other industries. For example Hammett (1983) reviewed the performance of semi-submersible drilling units. He notes that the petroleum industry has more than 1600 rig-years experience in using semi-submersible drilling units. In that time approximately 6,000 wells have been drilled which involved more than 130,000 man years. Semi-submersible drilling units have been subjected to 100-foot wave conditions, have continued drilling in 40-foot waves, and have transited over 1,000,000 miles in all kinds of sea-states. Hammett (1983) provides the following information on casualty rates.

**Total loss for Mobile Offshore Structures
and Merchant Ships in Worldwide Operation (1970-1976)**

<u>Type of Vessel</u>	<u>Casualty Rate</u> (Loss of units per 100 Vessel-Years)
<u>Mobile Rigs</u>	0.9
Jackups	1.4
Semi-submersibles	0.3
Barges	0.5
<u>Merchant Ships</u>	0.7

The discussions with the various organizations produced many facts and recommendations that have been incorporated into the text of this report. Some of these points, which in the authors opinion should be highlighted, are noted below. These points are mainly concerned with recommendations or requirements for studies of waves and structure response to wave action.

Designers:

Earl and Wright noted the variation in the magnitude of the extreme wave conditions throughout the study area and stressed the need to have extreme waves, winds and currents for each of the many different parts of the study area.

Earl and Wright also noted that for operational planning it is desirable to have in the order of five years of simultaneous measurements of waves, winds and currents.

Submarine Engineering provided considerable information on current design procedures. A concern with the lack of information and design procedures addressing wave steepness and wave grouping and the resulting effect of these phenomena on a structure was noted. The need for improved design procedures and regulations addressing wave induced drift forces and tilt was also noted. Submarine Engineering stressed the requirement for continuous simultaneous measurements of waves, winds and currents for the assessment of operations.

Owners:

PetroCanada presented a valuable statement on current practice that is reflected in this report. The benefit of a measurement and research program that has the object of verifying appropriate statistical wave height distributions for East Coast storms of various intensities and durations, in order to provide confidence in extreme wave heights, was noted.

Classification Societies:

The American Bureau of Shipping (ABS) expressed general satisfaction with the current design methods that are reported in Appendix A.

ABS noted that a number of items are being studied and reviewed by their Research Department. These items include:

- non linear effects in calculations of response of structures to waves
- time domain analyses
- effects of waves and currents on structures and wave-current interaction
- extreme wave conditions
- directional spectra

Regulation Agencies:

The Canadian Oil and Gas Lands Administration (COGLA) provided valuable insight into their concern with operations and the requirement of wave data for the assessment of operations. The effects of waves (and currents) on diving operations associated with oil and gas structures and the dependency of many activities on the timely completion of diving operations was noted. The relationship between quantities of consumables to be stored on a structure with the duration and frequency of downtime was stressed. Wave data are considered to be essential to downtime calculations.

Research:

The National Research Council (NRC) is concerned with the true simulation of prototype sea-states in a wave basin designed for model testing of structures. NRC is investigating the response of structures to many phenomena such as wave grouping, wave steepness, and extreme wave heights. NRC stressed the need for improved prototype measurements of waves to support this work and to eventually assist in the incorporation of the results of this work in engineering design procedures.

The Hydraulic Research Station, U.K. (HRS) noted the requirement to evaluate the response of some structures to waves in the presence of a current. HRS have also demonstrated that some structures have a critically different response in a directional sea-state than in unidirectional long crested waves.

The National Maritime Institute, U.K. (NMI) noted that current design procedures provide satisfactory results for the design of offshore structures. NMI are investigating the following items in their continuing research:

- low frequency response of structures
- free surface kinematics
- response of structures to waves in the presence of a current
- response to directional sea-states

The Institute of Oceanographic Sciences, U.K. (IOS) provided considerable background to wave related concerns in the U.K. Their comments are contained in this report.

2.5 Currents and Winds

From an engineering perspective waves cannot be treated in isolation from currents and winds.

In the design of a structure it is the total load on the structure, or one of its members, that must be considered. Consequently, the current and wind conditions that will exist at the same as the selected design wave conditions should be known. There are other loads, such as ice loading due to freezing spray or freezing rain. These other loads are not considered in this report.

In the assessment of operations, data on wind, currents, reduced visibility, etc., should be available with the wave data, as it may be a combination of events that lead to unsafe conditions or a closing down of an operation. The duration of downtime of a particular operation may depend on all of these environmental parameters. For example, currents are likely to be a very important phenomenon, in addition to wave action in restricting diving operations.

2.5.1 Design

For the design of a structure the publications referenced in Appendix A stress the need for complete environmental data.

API 1982 states that

"the tides, currents and wind which potentially occur simultaneously with the wave trains producing the extreme events"

should be developed. It further states that

"environmental loads should be combined in a manner consistent with the probability of their simultaneous occurrences during the loading condition being considered."

ABS 1983 notes that the most severe environmental conditions will normally be composed of

"The maximum wave height corresponding to the selected recurrence period together with the associated wind, current and limits of water depth, and appropriate ice and snow effects."

It also notes that consideration should be given to permutations of the combinations of these events, and that the recurrence period of the (total) event is normally not to be less than one hundred years.

It is clear that presentation of extreme wave data for design purposes requires a description of the current and wind that will occur at the same time. It is desirable that combinations of wave, wind and current conditions be considered where the return period of the joint event of three occurrences is 100 years or more.

2.5.2 Operations

The data required for complete assessment of operations are simultaneous observations of waves, currents and winds and, desirably, other phenomena such as visibility, ice, and air temperature. These observations should be made continuously over a period in the order of three to five years.

2.5.3 Current and Wave Interaction

Waves propagating in a current may be significantly influenced by the current to the extent that steepening and breaking of the waves may be induced. Variations in surface currents may also cause refraction, a phenomenon where wave energy is concentrated in certain areas and dispersed in other areas. Consequently, any definitive study of the wave climate of a selected area requires a knowledge of the currents that occur in that area.

In this investigation, the quality and availability of wind and current data that are required by the design, classification and regulatory organizations have not been studied.

3.0 AVAILABLE WAVE DATA FOR EASTERN CANADA STUDY AREA

This section discusses and assesses the three major types of wave data available for the study area.

Section 3.1 discusses instrumentally measured wave data. Section 3.2 discusses visually observed data from ships of opportunity. Section 3.3 discusses the "hindcast" datasets which are produced by using computer models to estimate waves from time series of historical wind speeds and directions.

3.1 Instrumentally Measured Wave Data

3.1.1 Discussion of Instrumentally Measured Wave Data

Extensive measurement of waves has been undertaken in Eastern Canada since 1970 primarily by the Marine Environmental Data Service (MEDS) of Fisheries and Oceans. Much offshore data has been acquired through cost shared programs between MEDS and the oil companies operating the drilling units. The Datawell Waverider buoy has been used as the wave sensing instrument. The Waverider consists of an accelerometer housed in a 0.7 or 0.9 metre diameter floating sphere that is tethered with a single point mooring. In normal operation the vertical travel of the buoy is measured as a function of time for twenty minutes every three hours and from this record various parameters describing the sea state can be determined. No information on wave direction is provided by this system.

Waves have been measured using other methods, but compared with the Waverider measurements few records obtained by other systems exist. Wave records have been obtained by measurements obtained with radar systems mounted in satellites, with fixed staffs mounted on piers in coastal areas, and since 1983 using a buoy capable of measuring wave direction.

It is estimated that approximately 219,000 twenty minute records have been obtained with the Waverider buoy within the study area. These records can be categorized as follows:

- measurements made close to the shoreline in support of the design of harbour or coastal structures. These amount to approximately 45 per cent of the available records and have little use to the oil and gas industry;
- measurements made at coastal locations to provide long term wave statistics. These records also have limited application to the oil and gas industry;
- measurements made during oil and gas exploration activities in the cooperative ventures between MEDS and the operators. These amount to approximately 62,330 records or 28.5 per cent of the available data. The measurements provide information on wind generated waves in areas where exploration is proceeding.

The standard parameters used to describe the magnitude of the wave conditions are the characteristic (or significant) wave height and the peak period. These variables are obtained from a variance spectrum analysis.

Common parameters used to describe the sea state and analysis procedures are described in section 2.1 of this report.

There is no doubt that the available recorded wave data are, and will be, invaluable to engineers and oceanographers concerned with exploration for recovery of hydrocarbons. However, these data provide intermittent coverage for relatively short periods at any one location. At Hibernia, approximately 3 years of continuous coverage is available. In the vicinity of Sable Island, 2 years of coverage is the maximum available. For the remainder of the study area, the coverage is very intermittent.

As discussed in earlier sections of this report, it is clear that the ultimate wave record for a location where recovery of oil or gas is to take place would be at least one hundred years in length and would include wave direction information and a relatively complete and accurate description of the water surface profile. A twenty year time series is considered to be the minimum required for the reliable prediction of extreme events for the oil industry. Non-directional wave measurement on Canada's east coast began in earnest with hydrocarbon exploration in the early 1970's. Directional measurements began only in 1983 and are as yet not proven to be reliable. Absolute measurements of the surface profile on a scale suitable for the development of climatological descriptions of the parameters over a significant ocean area are not feasible at this time.

Consequently, the available measured data do not provide a basis from which reliable estimates of extreme events can be obtained. The measured series are too short and do not include all necessary variables. Wave climate statistics may be developed from recorded data at Hibernia and, to a limited extent, near Sable Island, but not for any other location in the offshore part of the study area.

One of the primary uses of these data is for the verification of numerical procedures for estimating wave conditions from known meteorological conditions. These wave prediction (or hindcasting) procedures are discussed in section 3.5.

The fact that the existing data have been obtained only during exploratory programs means that data are not available for areas where exploration is about to start. At some locations, the existing data are limited because the measurements are confined to the exploratory drilling season and do not provide coverage during the most severe part of the year, a period to which permanent structures would be exposed.

Remote sensing techniques have been used to measure waves from satellites or aircraft. These techniques are even more recent than the Waverider measurement program and the time series are therefore shorter. The techniques involve the use of laser altimeters and sophisticated radars. To date only the laser altimeter has been proven capable of producing accurate results on the continuing basis required to develop climatological data sets. The laser altimeter produces only a wave height value and does not measure periods, directions on wave profiles.

Details of the available recorded wave data that have been obtained in the study area are provided in the following sections.

3.1.2 Availability of Instrumentally Measured Wave Data

The majority of wave records of interest to this study have been obtained and archived by the Marine Environmental Data Service (MEDS), Fisheries and Oceans. Other organizations that have obtained wave records are the National Research Council of Canada and the National Oceanic and Atmospheric Administration (NOAA) (satellite data). These data are described in the following sections. All of the data described are archived by MEDS either in digital or report form.

MEDS Holdings

MEDS has been largely responsible for the retrieval, analysis and presentation of all wave measurements undertaken in Canadian waters since 1970. Wave data have been obtained at over 200 locations using buoys, staff gauges and pressure cells.

The locations where MEDS has obtained wave data within the study area are shown in Figure 3.1. The period of coverage for each location is provided in Appendix C.

The standard product available for each of the indicated locations are various presentations of the characteristic wave height and peak period obtained at 3 hour intervals when the characteristic height is less than 4 meters and every 20 minutes when greater than 4 meters. Many other products and statistical presentations are available and these are described in MEDS publications. The variance spectrum for each wave record is also archived.

As stated the data of interest to this study were obtained using the Datawell Waverider buoy. These buoys are calibrated by MEDS before and after deployment and the estimates of wave heights are considered to be accurate to within 3 per cent.

The Waverider buoy moves in an approximately circular motion in a vertical plane restrained by its single point mooring. Consequently, the resulting water surface profile is not exactly the same as that measured by a fixed staff. This is a limitation of the Waverider data to some engineering applications.

NRC Wave Study

A wave climate study of the Great Lakes and Gulf of St. Lawrence was completed by the Hydraulics Laboratory of the National Research Council during the three year period 1965-1967, Ashe and Ploeg (1968). Wave records were obtained with accelerometer buoys at ten locations in the Gulf of St. Lawrence as shown in Figure 3.1. The results of this study are presented in Ashe and Ploeg (1968). They include listings of the characteristic wave heights and periods obtained at each location.

NOAA Satellite Data

Several NOAA satellites have had on board a laser altimeter device with the capability to measure significant wave height. Only the data from the

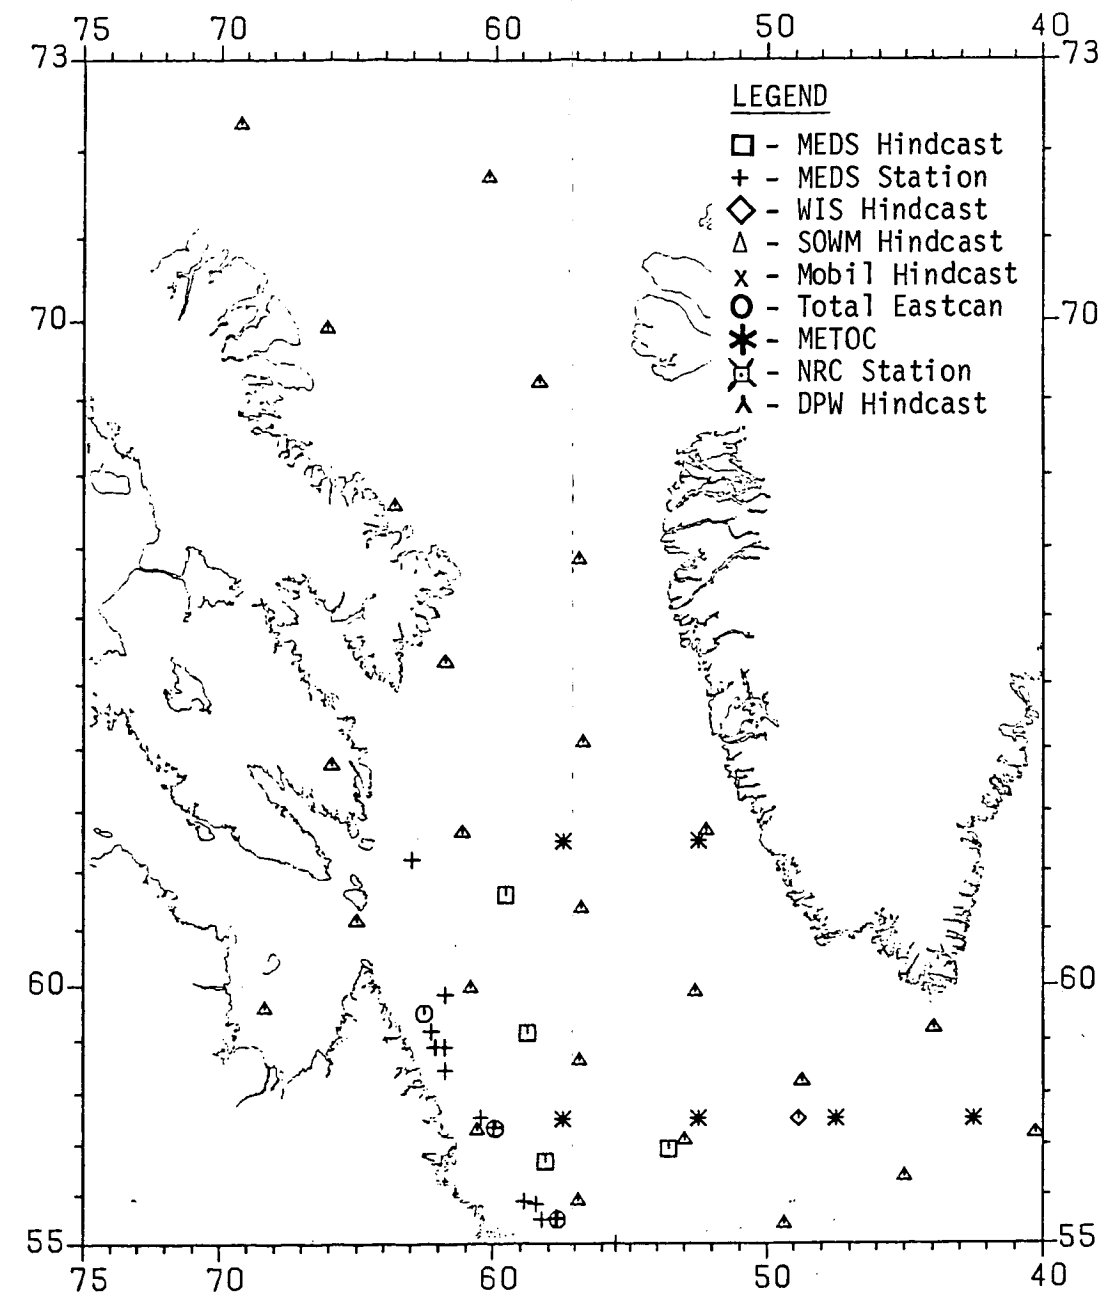
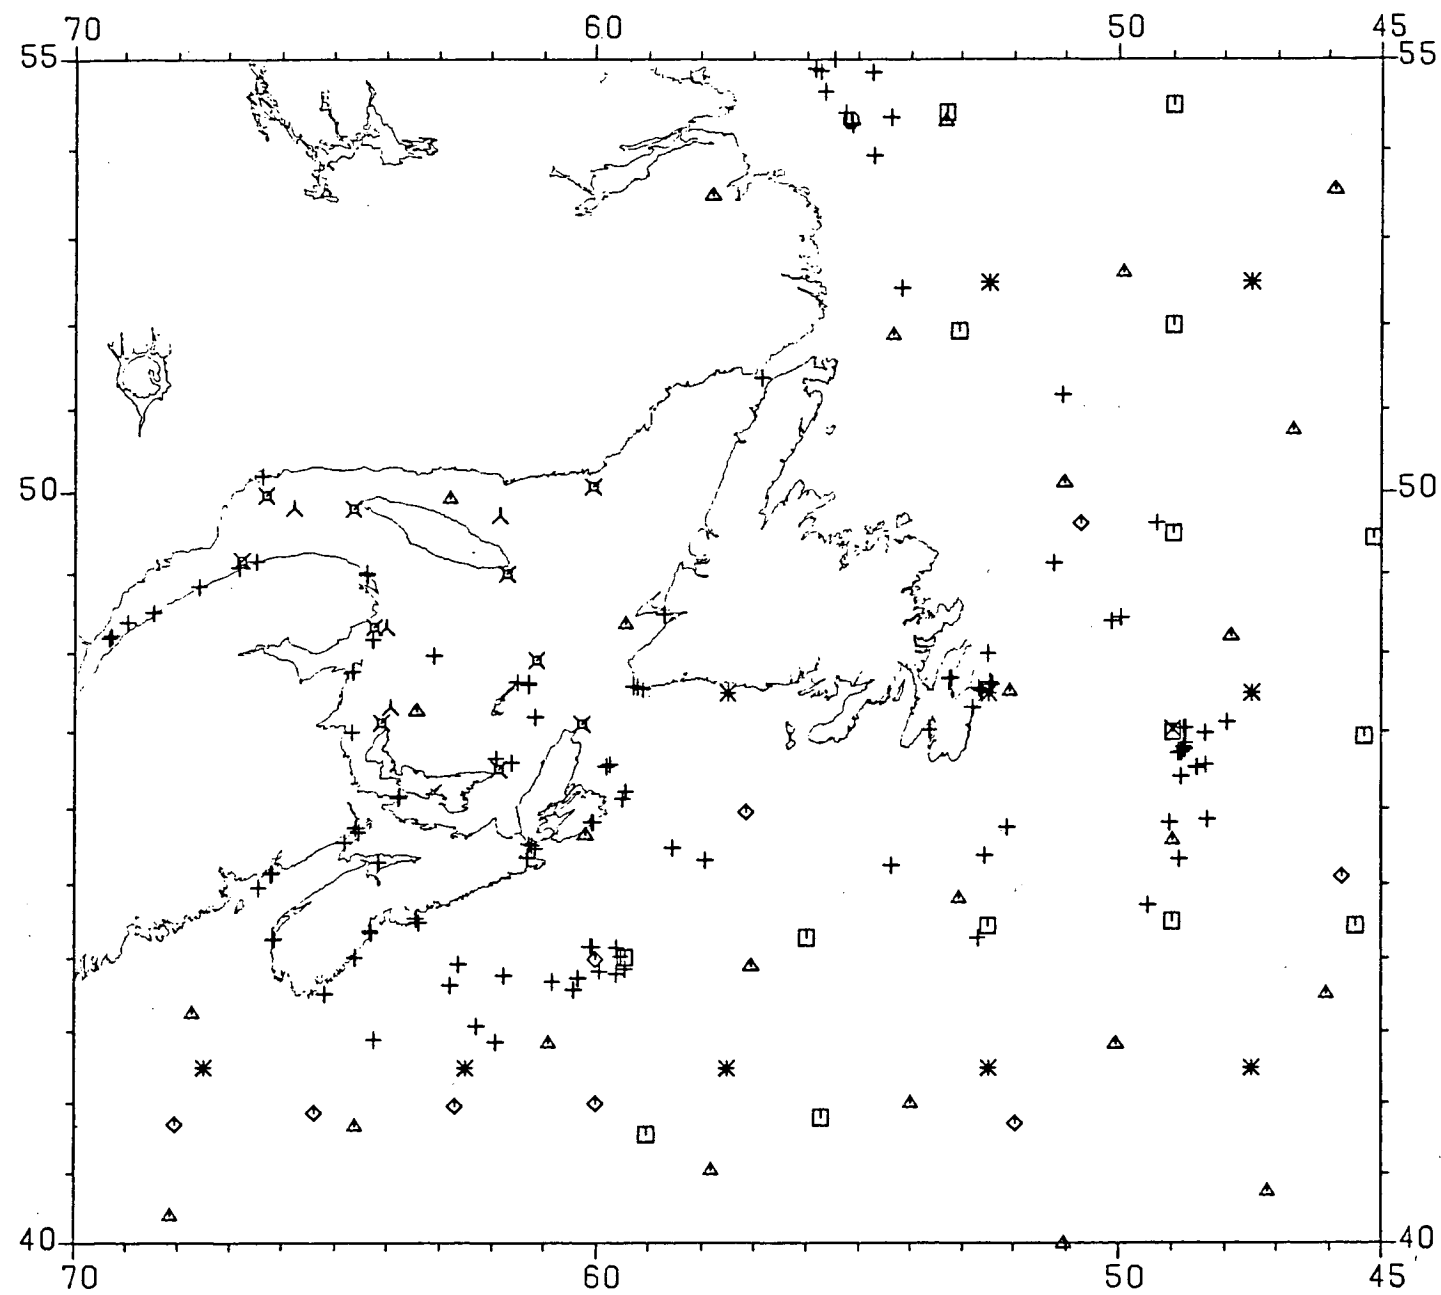


Figure 3.1 Map of Wave Data Locations.

SEASAT satellite which operated from July to October 1978 have been acquired, assessed and archived by MEDS. These data have not played a part in the development of knowledge of design conditions or wave climate statistics due to their short time series and the limitations of the measurement to significant wave height only.

3.1.3 Assessment of Instrumentally Measured Wave Data

MEDS Measured Data

The data collected by the joint MEDS-industry programs in association with exploratory drilling is considered to be of excellent quality. The calibration procedures for the instrument and the control applied to the data conform to accepted scientific practice. Wave direction is not measured. Waves having periods longer than 30 seconds are also not measured by the instrumentation used by MEDS in the offshore.

When and where the data exist they are suitable to be considered the standard for evaluation of the performance of other methods of determining the wave spectrum, the characteristic wave height and the period of the most energetic frequency band in the wave field.

The spatial and temporal coverage are acknowledged to be limited. Only at Hibernia, where approximately four years of continuous coverage is available, and in the vicinity of Sable Island, where up to two years of continuous coverage is available at one location, are sufficient data available to estimate the wave climate of the area. Sufficient data to estimate extreme events are otherwise only available at coastal locations such as at Logy Bay, where more than ten years of data have been collected.

NRC Wave Study

The data from the NRC wave study were obtained with first prototype accelerometer buoys and are not considered to be as reliable as the Waverider data. Wave direction is also not measured.

The data are considered to be useful for the verification of numerical prediction models. The intermittent coverage provided by NRC data is insufficient to provide reliable estimates of the wave climate of the Gulf of St. Lawrence and cannot be used to produce estimates of extreme wave conditions.

NOAA Satellite Data

The data from the SEASAT satellite were evaluated against the measured data held in MEDS for the periods and locations where coincidences of measurement occurred. The results indicated the SEASAT data were accurate to within 10% and therefore would be valuable from a wave climate perspective if sufficient spatial and temporal coverage were available.

The required temporal coverage is of course not available since the satellite only lasted a little over 3 months. The spatial coverage of such a satellite would approximately match the number of observations available from the merchant fleet of ships reporting visual wave observations. (RA Jones, personal communication).

3.2 Observations by Ships Officers

3.2.1 Characteristics of the Shipboard Observation Data

Observations of wave conditions as well as meteorological phenomena are routinely made by merchant shipping. From many ships these data are transmitted to various agencies where they are sorted, edited and archived. Data obtained since the early 1900's have been archived and used by some agencies. The majority of the data are, naturally, concentrated along the major shipping routes.

The ships officer is required to estimate and report the significant height and significant period of the locally generated waves as well as the significant height, significant period and direction of the swell. The significant height is defined as the average height of the larger well formed waves, and the significant period as the average period of these waves.

3.2.2 Availability of the Shipboard Observation Data

Ship observation data covering the study area can be obtained from the U.S. National Climatic Center in Ashville, North Carolina or from the UK Meteorological Office, Bracknell (U.K. data are also available in synthesized form from the National Maritime Institute).

Data from the U.S. National Climate Center are summarized in publications entitled "Summaries of Synoptic Meteorological Observations".

The Atmospheric Environment Service (AES) of the Department of the Environment has acquired the visually observed data and has provided a copy of the east coast observations to MEDS.

3.2.3 Assessment of the Shipboard Observation Data

Many researchers, for example Hoffman and Chen (1978), Chen and Hoffman (1979), Cummins and Bales (1980), Andrews et al. (1983), and Hogben and Lumb (1967), refer to limitations of ship observation data. The data are considered to have limited reliability because the estimates are made by different observers with different backgrounds and training, while standing at different elevations on moving ships in varying conditions of weather and visibility. The main limitation of the data, other than the observer bias, is the fair weather bias that results from the tendency of ships to avoid storms. Observations of wave period are considered by most investigators to be particularly unreliable.

Comparisons between reported visual observations and the significant wave height from recorded data show considerable scatter, as illustrated in Figure 3.2 from Hogben and Lumb (1967). The lines on Figure 3.2 are the slope 1 line and the best fit to the data. Relationships between the significant wave height and period from an instrument recording and visual observations of wave heights and periods have been developed by many investigators including Hogben and Lumb (1967), Nordenstrom (1975), Jardine (1979), and Ochi (1978). The variation between these relationships is illustrated in Figures 3.2 from Hogben and Lumb (1967) and Figures 3.3, 3.4 and 3.5 from Andrews et al. (1983).

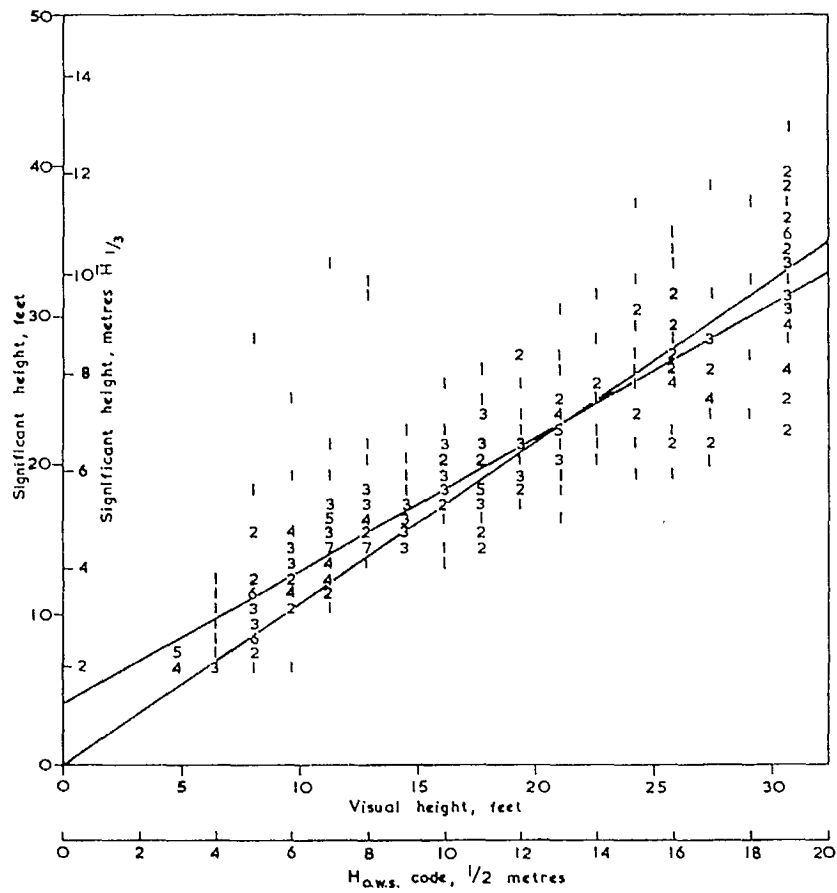


Figure 3.2 Comparison of Measured Significant Wave Height Versus Visually Observed Height (Hogben and Lumb, 1967).

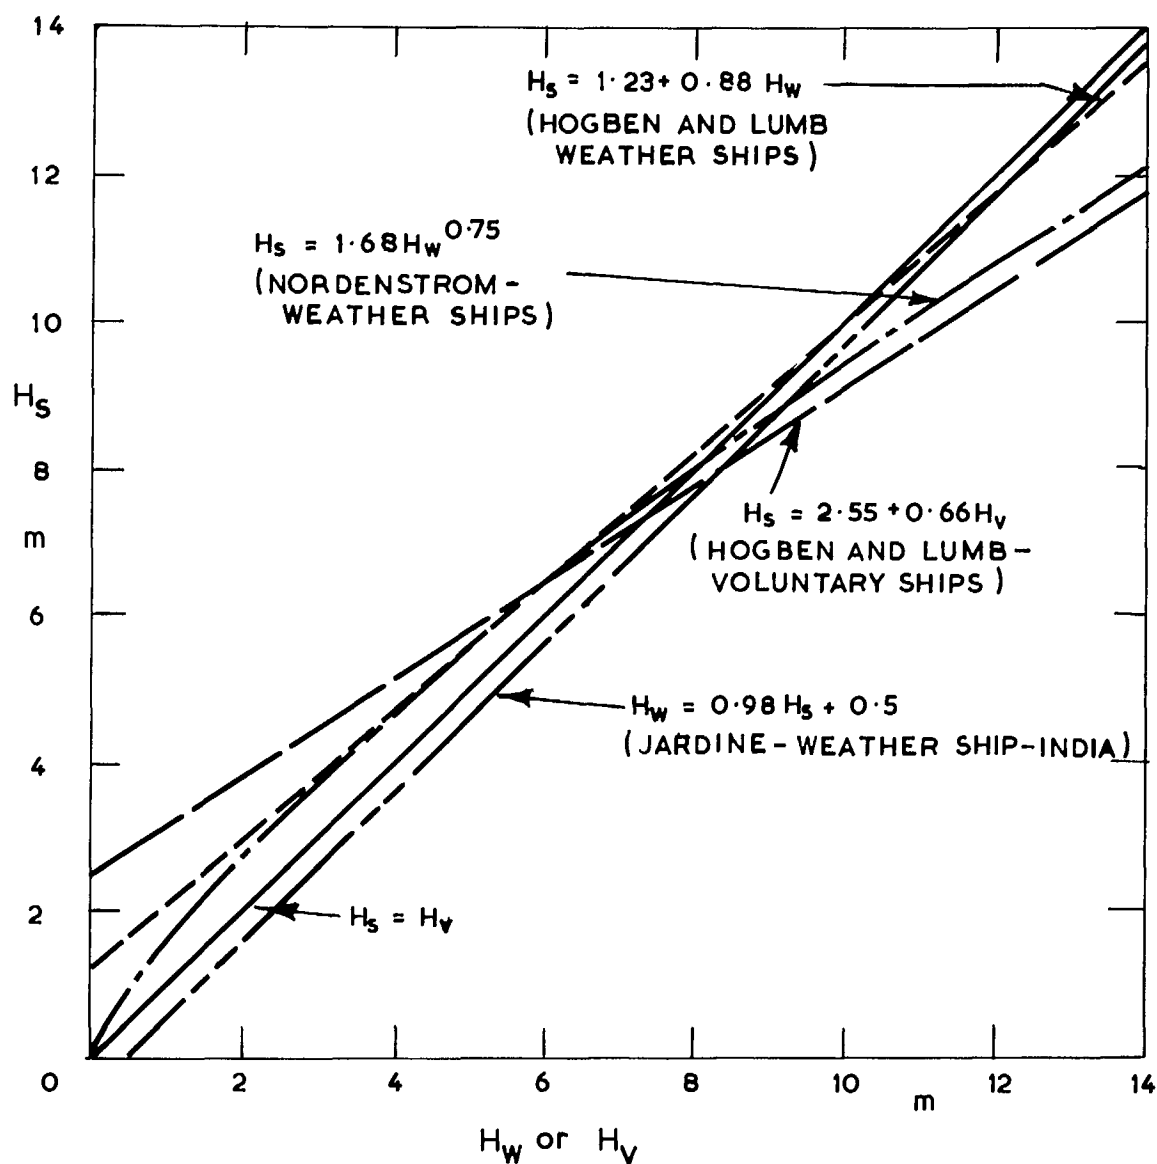
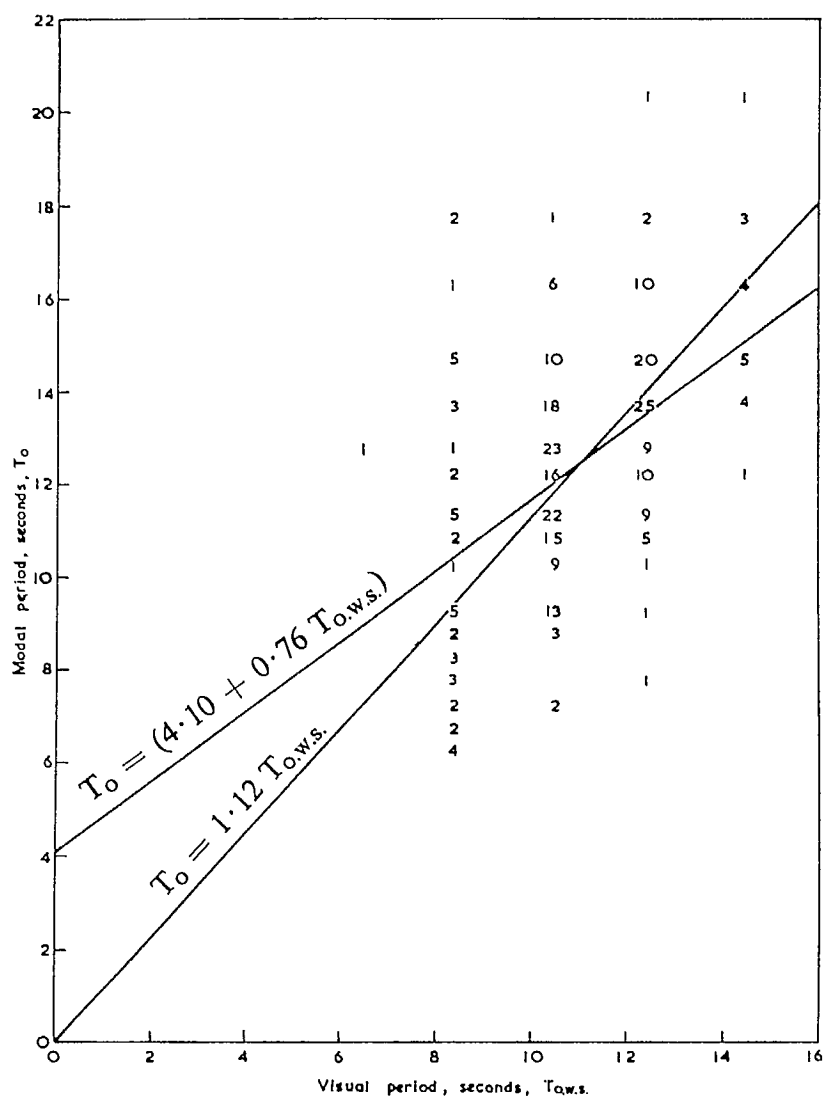


Figure 3.3 Comparisons of Relationships between Instrumental and Visual Wave Height Observations (Andrews et al., 1983).



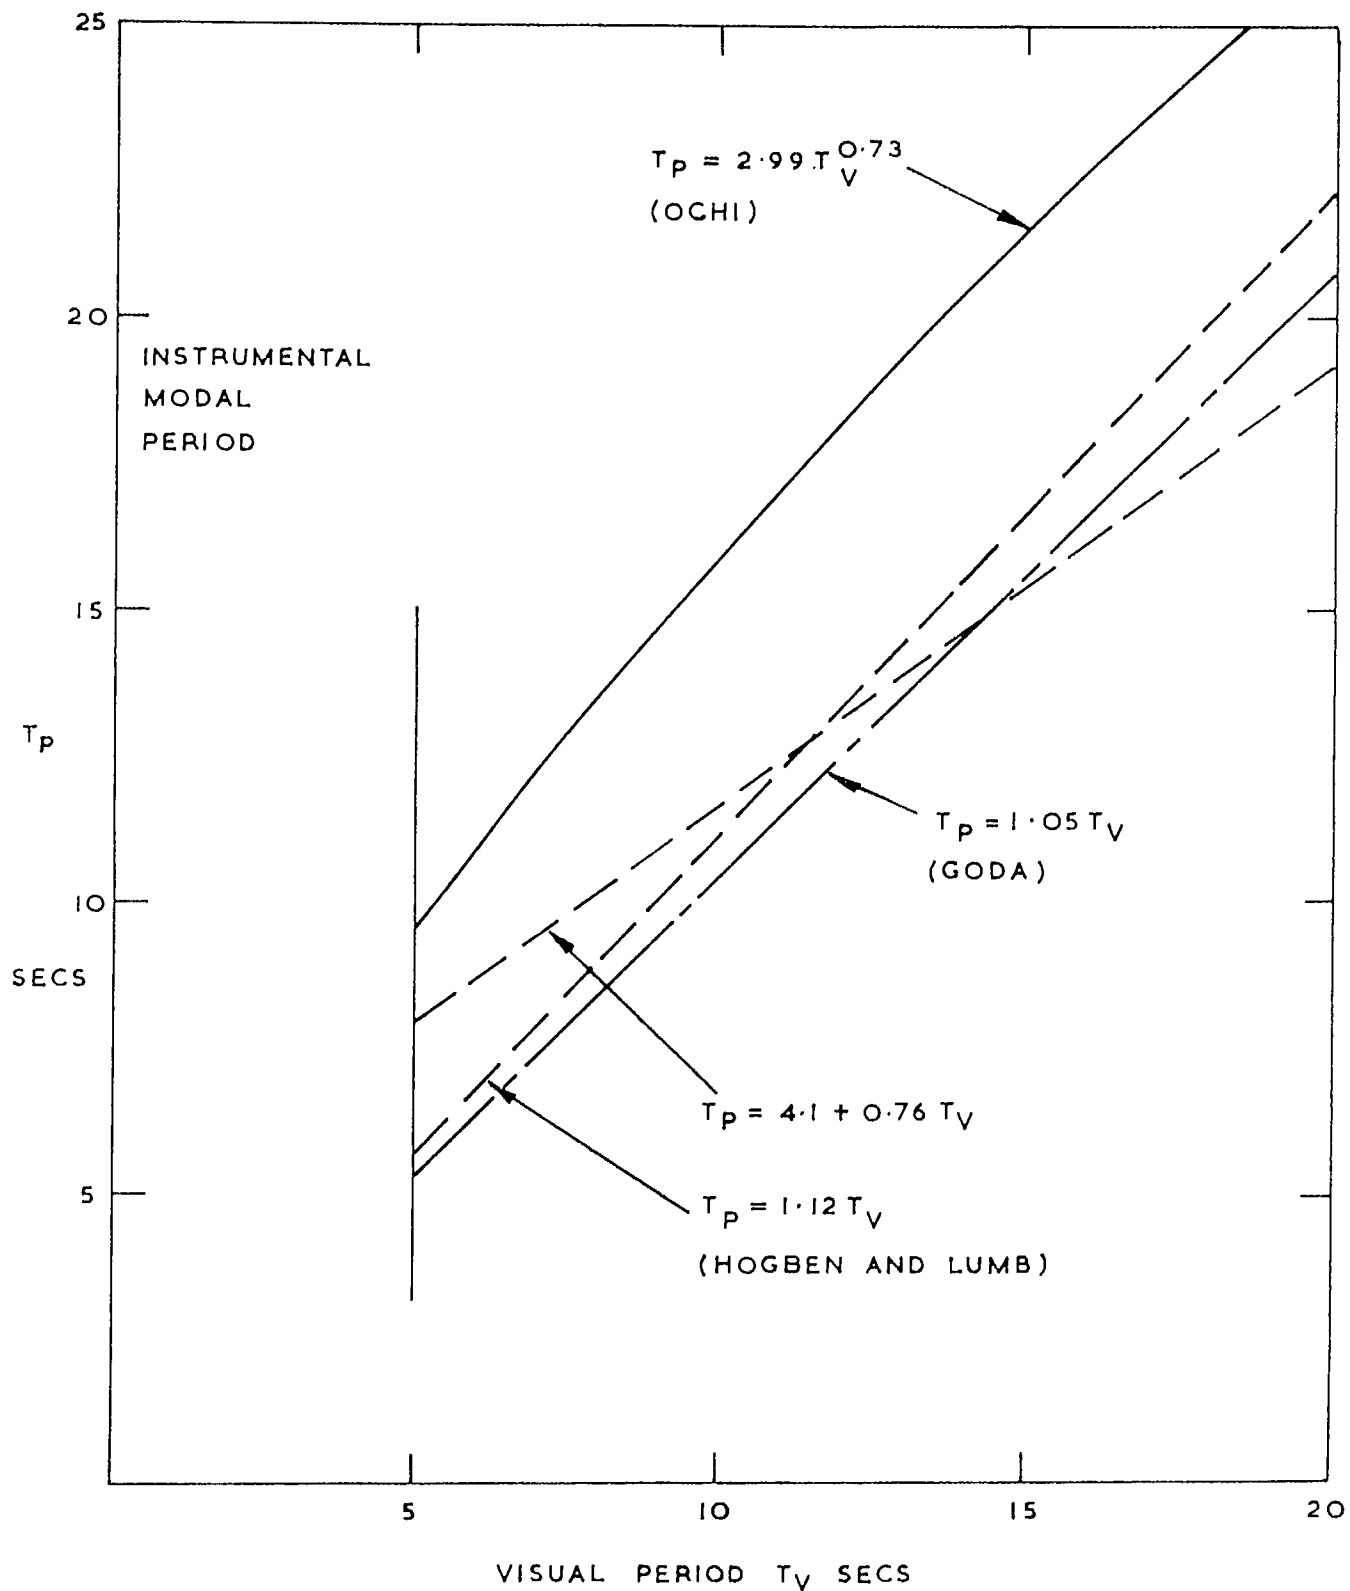


Figure 3.5 Comparison of Visual and Modal Wave Period (Andrews et al., 1983).

Andrews et al. (1983), describe 'considerable divergence' between these developed relationships for the higher values of wave height and period and note 'that estimates of extreme wave height based on visual observations of height alone may be subject to considerable uncertainty.'

On the other hand it has been noted by Captain Blackham of Noble Denton, UK (personal communication) that the assumption of a fair weather bias may not be justified in certain areas off the Canadian east coast. He points out that storm avoidance can be made difficult because of the geography of the area and because of the economic implications of remaining in port to wait out a storm or steering a longer course around it. He has also pointed out that the ships reporting visual observations are generally large and designed to weather the most severe Atlantic storms.

Wilson (1983) reported on a comparison of a variety of wave datasets for the Newfoundland Grand Banks. The comparison failed to produce evidence of a fair weather bias in the visually observed data. However, it is known that the database has in it a certain amount of erroneously coded data. It could not be concluded with certainty that these erroneous data did not offset the fair weather bias.

The limitations of ship observation data can be summarized as follows:

1. There is limited coverage for areas not covered by the major shipping routes.
2. From an engineering point of view the description of the sea state is limited since wave spectra are not available and the observed period is unreliable.
3. The observations are not considered, at this time, to be sufficiently precise for estimating the extreme events required for the design of ocean structures. They do not, for example, provide reliable information on the maximum wave conditions occurring during storms in a selected area.

The METOC data set and the NMIMET procedure described in section 3.3. and 3.4 below are based on visual observations. In each case processing procedures have been designed to overcome some of the limitations described above.

3.3 METOC Wave Data

3.3.1 Characteristics of the METOC Wave Data Set

The METOC wave data set has been prepared from significant wave charts prepared twice daily by the Canadian Forces METOC (Meteorology-Oceanography) Centre in Halifax. The charts are prepared from ship observations supplemented with real-time Waverider buoy data from exploratory oil rigs and coastal locations. The observations and buoy data are further supplemented with data derived from estimated winds using simple hindcast procedures to fill gaps where no ship observations or Waverider data are available. This tends to overcome the limitation that the visual observations are concentrated on the major shipping routes.

The digital dataset has been obtained by manually abstracting values of wave height, wave period and wave direction from the historical wave charts for each five degree square. This work been carried out by the Bedford Institute of Oceanography and the Atmospheric Environment Service.

The main grid used in the abstraction consists of squares of five degrees latitude by five degrees longitude, except in coastal areas where the grid has been distorted to accommodate the coastal topography.

The wave predictions used in the preparation of the METOC chart takes into account ice conditions limiting wave generation and propagation.

3.3.2 Availability of the METOC Wave Data

The METOC charts cover the North Atlantic Ocean between 25 degrees north latitude and 70 degrees north latitude, excluding major embayments including the Gulf of Mexico, Gulf of St. Lawrence and Hudson Bay. The grid points applicable to the study area are shown in figure 3.1.

The wave height data abstracted for five degree squares by the Bedford Institute cover the the period January 1, 1970 to December 31, 1980. The period and direction data and the maximum significant height occurring in each five degree abstracted by the AES cover the period May 1, 1972 to December 31, 1980. These data sets have been integrated in a single magnetic tape by MEDS and are available from BIO, AES or MEDS.

While the archived digital data are only available for grid points at five-degree intervals, data could be extracted from the original charts for any selected location.

3.3.3 Assessment of the METOC Data

The quality of this data set can be considered to be higher than that of the ship observation data from which it has been prepared. This is due to the subjective quality assessment carried out by the analysts while preparing the charts. The analysts can and do compare observations from nearby ships to identify errors and use the previous chart and the hindcasting nomograms to assess individual observations and fill data gaps.

The METOC data have been compared to the data produced by four of the five hindcast described in later sections. It is not possible to assess the METOC data against measured data since the measurements were reported to the Center and were used in preparing the charts. Therefore they must agree.

Figure 3.6 (Oct. 73) is a comparison of the METOC data with measured data, with a SOWM hindcast point and a WIS hindcast point in the vicinity of Hibernia. Figure 3.7 shows the locations of the wave data points used in this comparison and those others used in later parts of this section. The agreement is quite acceptable for operational concerns during the period October 13 to 31 when the measurements are available. During the period October 9 to 12 it is not clear which wave height is correct. Figure 3.8 (March 73) on the other hand is featured by a sharp disagreement between the data sets at another location near Hibernia. A review of the pressure analysis and the ice chart reveals the cause. The METOC data is in fact the more correct. The

hindcasts produced large waves because the low pressure area generating the wind was located to cause a long fetch generating area extending NNW into the Labrador Sea. However the waves were not generated because a broad ice field extended from the Labrador Coast almost to Flemish Cap and severely limited wave growth. The ice limit was not included in the SOWM and WIS hindcasts.

Other comparisons to the hindcast datasets reveal that the METOC data frequently agrees with one or more of these while disagreeing with others. While there is no consistent agreement with the other data sets it can be said that the METOC data usually agrees better with the more carefully done hindcasts.

The Mobil Oil hindcast contained eight storms for the period 1970 to 1980. For six of these storms there were no measurements available for the preparation of the METOC charts and the data provides an independent check on the METOC data. Table 3.1 below compares the peak significant wave heights for each storm.

Date	H 1/3 METOC (grid point no)	MOBIL H 1/3 CARD 670 (CARD 670)
March 4, 1978	11.5	10.9m
January 21, 1977	9.0	12.6m
March 18, 1976	9.9	10.6m
March 11-12, 1974	9.0	11.4m
January 17, 1971	6.1	12.5m
January 22, 1970	10.2	13.3m

Table 3.1 METOC and Mobil hindcast maximum significant wave heights for six storms.


In assessing a dataset such as METOC the uses of the data must be kept in mind. There are essentially two applications for which the data can be used. The first is the determination of the wave climate for operational concerns. Examples of this would be the determination that the waves were larger than a given height for 30% of the time in February or that once the waves exceeded 6 metres at a given time of year they persisted above that height for 36 hours on the average.

It is concluded that in areas where there have been sufficient ship reports over the years and throughout the seasons of the year, the METOC data as published by Neu (1982) are good for these sorts of applications.

The second application for the METOC data would be in the estimation of return periods for extreme events. The estimation of an accurate return period depends on the accurate determination of peak wave heights for all the most severe storms. It is concluded that the METOC data is not as reliable for this application as a carefully prepared hindcast for the following reasons.

- The hindcast method used in preparing the charts in the absence of ship observation data is not nearly as sophisticated as that used in the better hindcast models.

Figure 3.6 A comparison of several data sources for October, 1973.

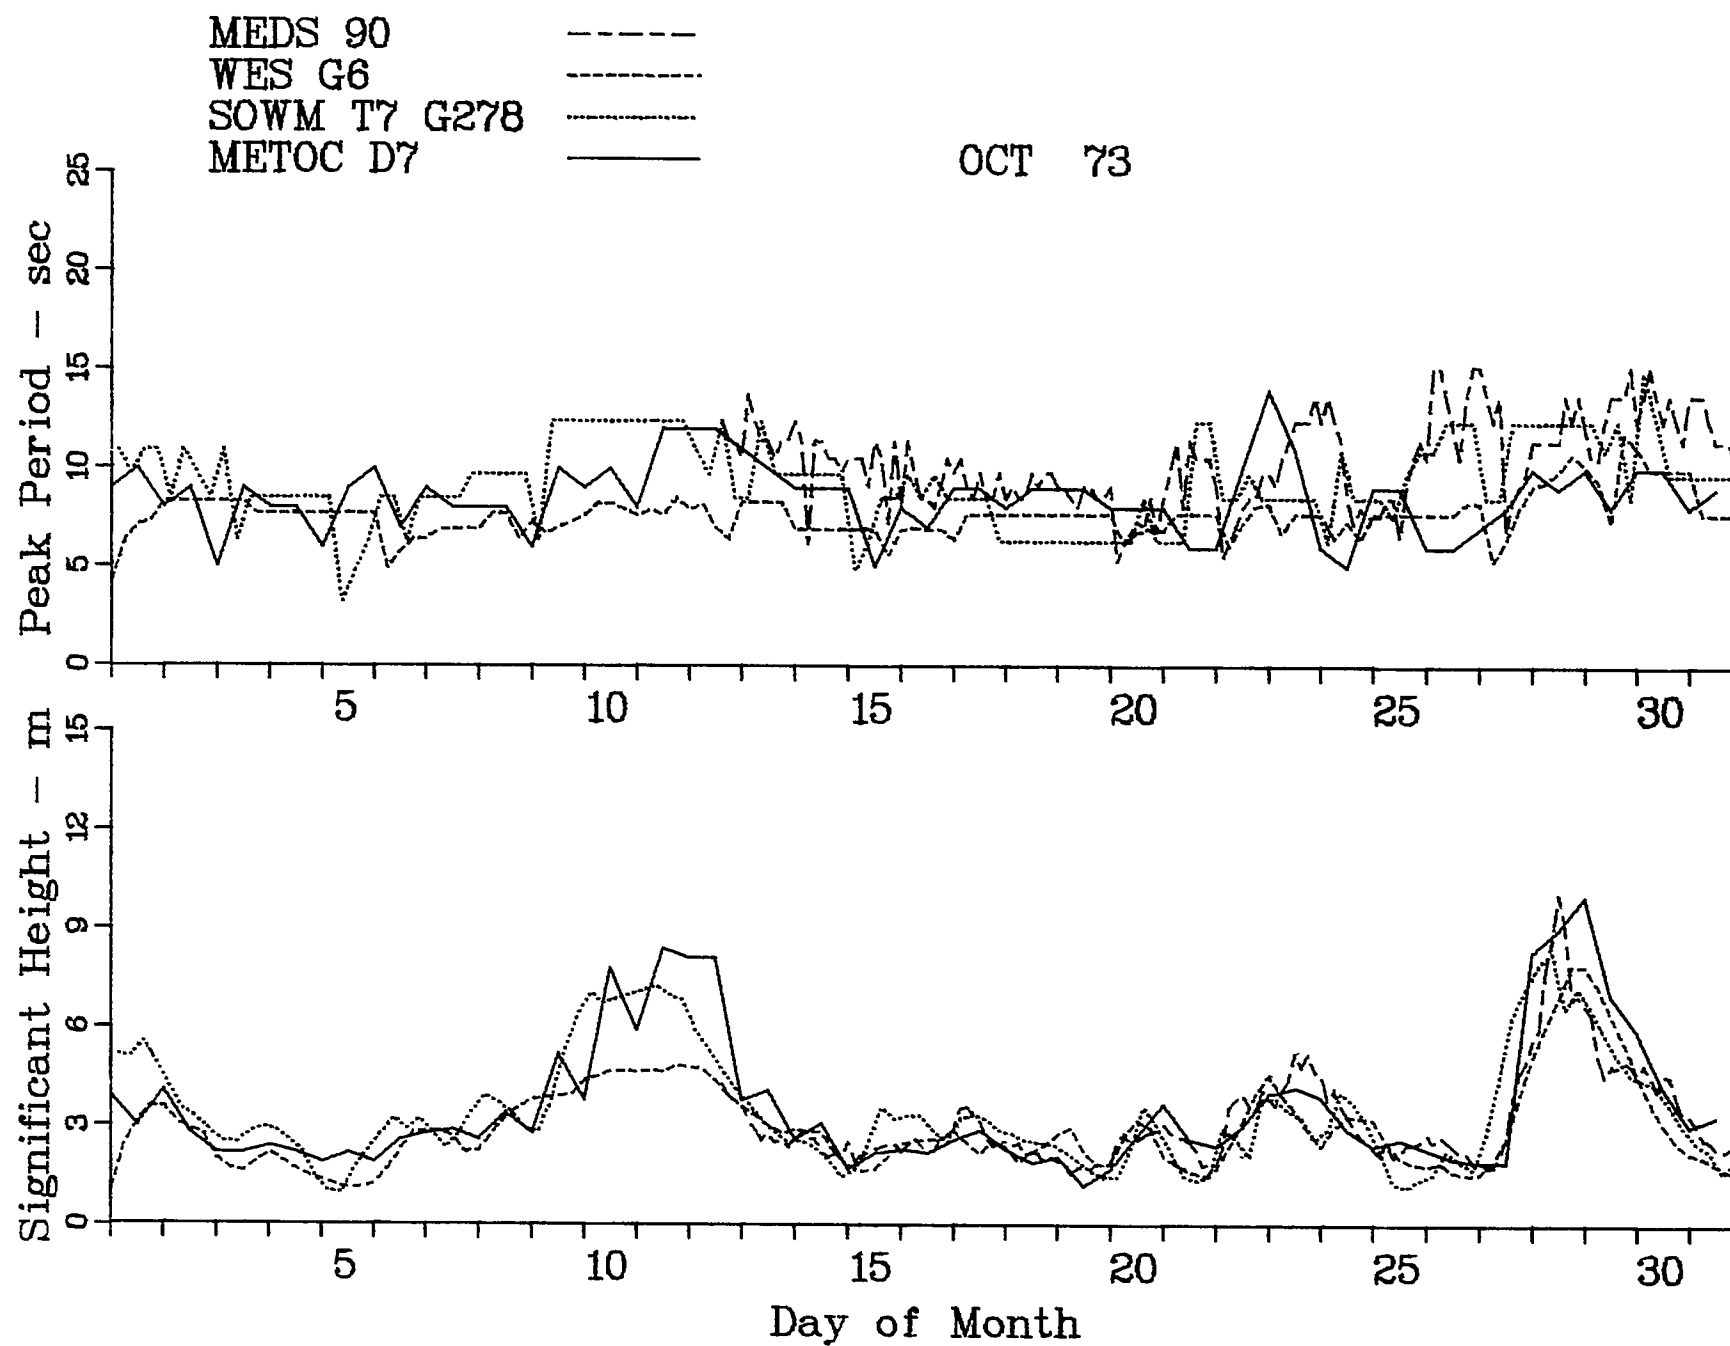


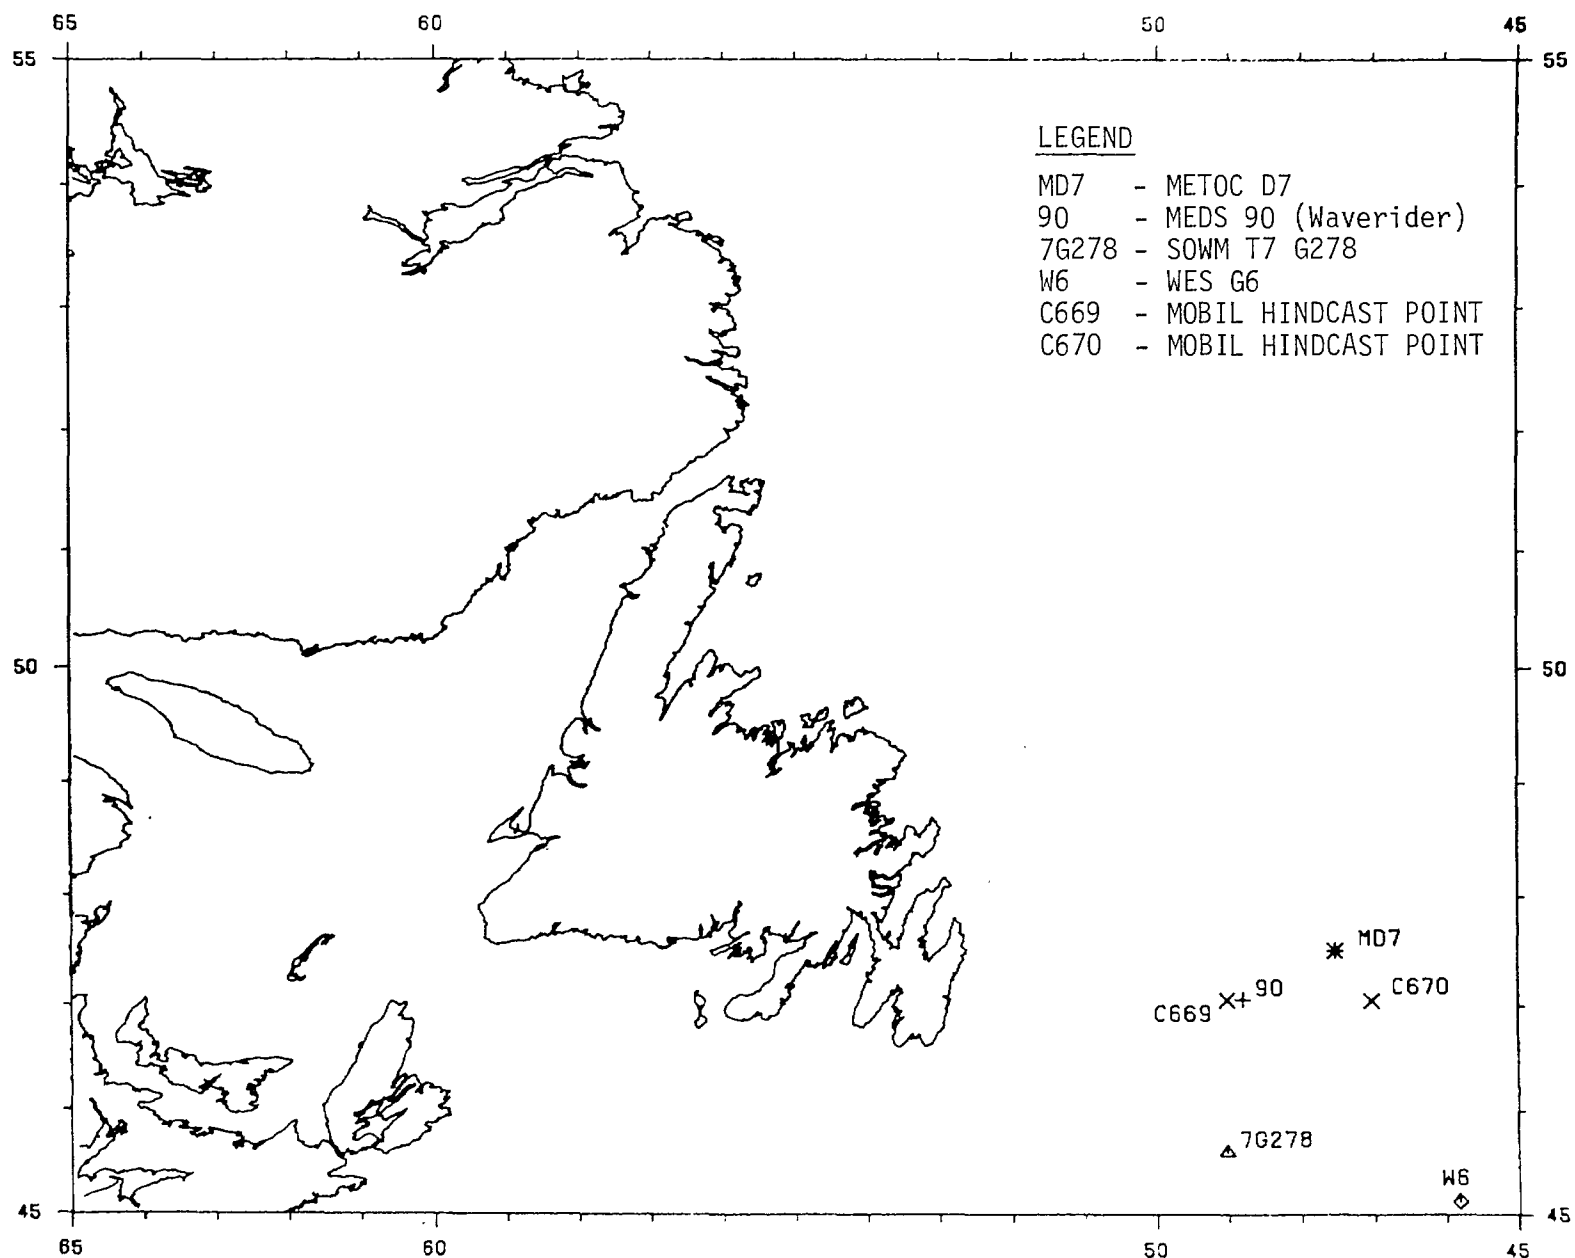


Figure 3.7 Locations of some of the wave data intercompared in this study.

Figure 3.8 A comparison of several data sources for March, 1973.

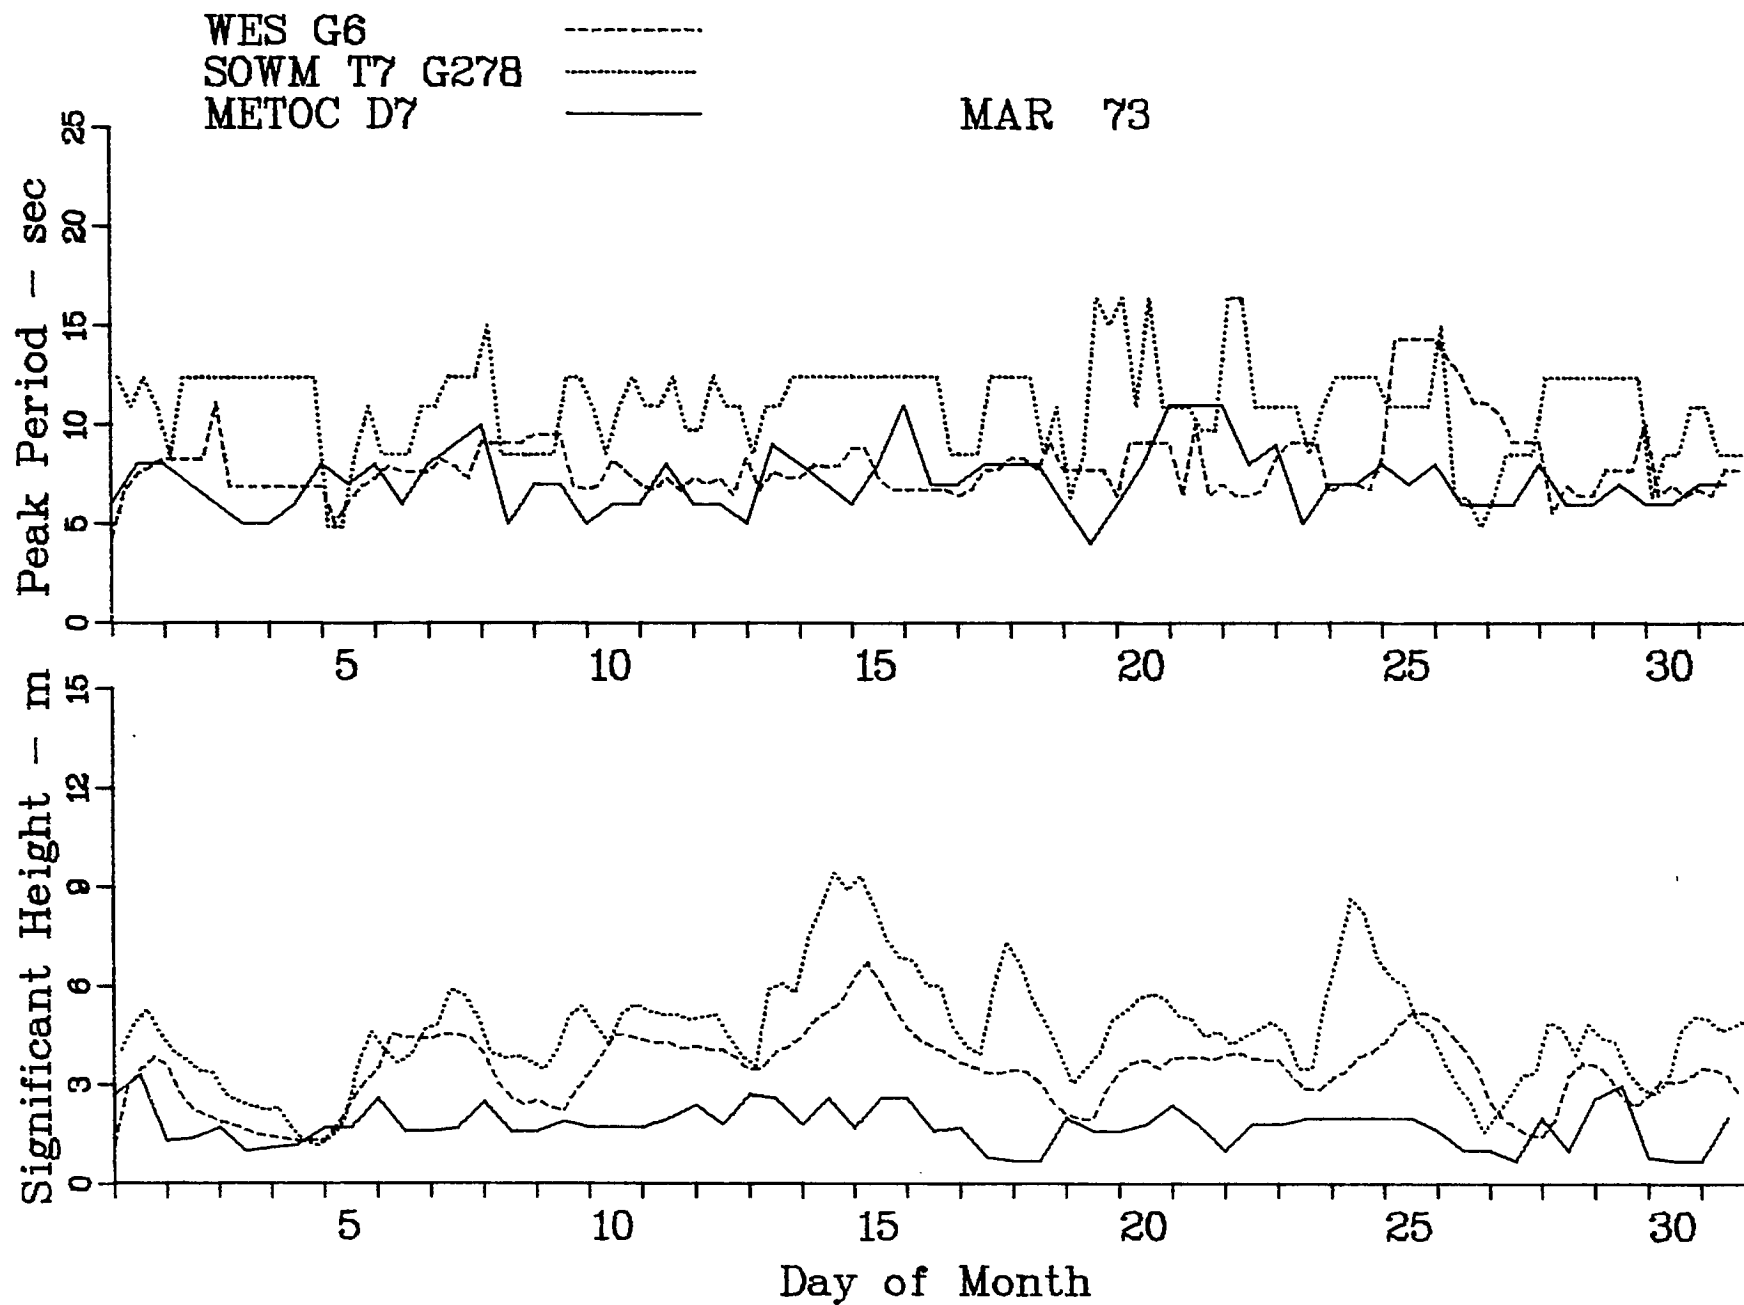

- The personnel preparing the charts have less data and less opportunity to assess the development of the winds in a storm than those preparing after the fact the hindcast input with a full history of the storm and the additional observation data which missed the cutoff in the real-time operations.
- The distribution of ships and the accuracy of their observations can not be expected to always be such as to pick up and produce accurate reports of the storm peaks.
- The suspected fair weather bias may be a factor in some or many circumstances.

3.4 NMIMET Procedure

3.4.1 Characteristics of the NMIMET Procedure

NMIMET is a suite of computer programs developed at NMI Ltd., Feltham U.K., in collaboration with the U.K. Meteorological Office, for the purpose of synthesising statistics of wave climates from visual observations of wave height and wind speed, or wind speed alone.

Extensive ship observations made in Canadian waters have been archived by the U.K. Meteorological offices. These observations are sufficiently numerous for the development of meaningful statistics only in the vicinity of major shipping routes. These data in their "raw" form contain many limitations as discussed in section 3.2.3.

In NMIMET a parametric model of the joint probability of wave height and wind speed is used as a best fit function for smoothing and enhancing the quality of the ship observations of waves. Implausible observations are thus suppressed without subjective intervention.

Details of the models are contained in Andrew et al. (1983).

Outputs from the model consist of scatter diagrams by season and directional sector where sufficient data exist. The frequency of extreme events can be estimated using either Weibull or log-normal techniques based on all the data. The use of this technique to estimate extreme events has not been theoretically justified and is considered questionable.

3.4.2 Availability of the NMIMET Data

The National Maritime Institute of the U.K. will produce, for a charge, an analysis of the ship observation data for anywhere the data are available. If the area of interest is off the major shipping routes it may be necessary to increase the size of the area in order to obtain sufficient observation data to produce a reliable synthesis.

3.4.3 Assessment of the NMIMET Analysis

The NMIMET procedure has been extensively assessed by the developers of the procedure against measured data in the vicinity of the UK. The results there were good for the exceedence of wave heights.

NMIMET data were obtained for three locations in the study area in order to obtain some experience with the data. It was expected that wave climate statistics (for example the wave height exceeded for 10, 50 and 90 percent of the year) would compare favourably with the METOC data and, possibly, the SOWM and WIS hindcast data for the more offshore locations. This was not found to be the case. These comparisons are presented and discussed in section 3.6. A verified source of data does not exist in the study area suitable for comparison with NMIMET data so it is not possible to draw firm conclusions as to the reliability of the NMIMET data. At this time these data can only be treated with caution as must the other datasets.

It is not expected, for the reasons discussed when reviewing ship observation and METOC data in general, that these data would be particularly suitable for the estimation of extremes. However, there are no suitable data available to either substantiate or disprove this expectation unequivocally.

3.5 Hindcast Wave Data

The sea state or the magnitude of the waves, on any body of water, can be predicted to a reasonably accuracy if the wind field over the water and its time history are known. The calculation requires a numerical model that should simulate the physical processes of wave generation by wind, wave growth, wave-wave interaction, wave propagation, wave-current interaction and wave-seabed interaction. If the physical processes are well represented by the numerical model, the reliability or accuracy of the prediction of the wave conditions is dependent on the accuracy of the description of the wind field over the generating area.

There are two categories of models. The simplest models represent an empirical approach that provides an estimate of the significant wave height and period, or similar parameters, and do not deal in depth with the physics of the problem. The other category includes the spectral models that describe the sea state by a directional variance spectrum. These models may include equations that deal with the spectral energy balance and the transfer of energy between wave periods (wave-wave interaction).

These latter models generally involve far more complex procedures than parametric models, and require relatively powerful computers.

In the simplest models, the wind velocity is assumed to be constant over the generating area, while in the complex models, the wind velocity is input at grid points over the generating area.

The accuracy of the latter model is partially dependent on the size of the grid and time interval between the wind velocity data. The wind data for the grid are determined from pressure gradients, although in some instances, these may be blended with winds obtained by other means. A more complete discussion of the state of the art of methods for sea state prediction is contained in Cardone and Ross (1977).

Many wind-wave hindcasts, which are based on historical wind data, have been undertaken for specific sites and have limited use for other areas. Two exceptions in the study area are hindcasts completed by the U.S. Navy, and the U.S. Army Corps of Engineers.

The U.S. Navy Fleet Numerical Oceanographic Center undertakes continuous wave forecasts using a spectral model of the oceans of the northern hemisphere. Of particular interest to this study, is a 20-year hindcast of the North Atlantic, completed with the U.S. Navy Spectral Ocean Wave Model (SOWM). These data for grid points in the study area have been archived by MEDS.

The U.S. Army Corps of Engineers, also completed a 20-year hindcast for the North Atlantic, using much the same pressure data as used in the U.S. Navy hindcast, but with an improved description of storms over the east coast of the U.S.A. This hindcast used a wave prediction model developed by Resio, and it is described in Corson et al. (1981) and Corson and Resio (1981). The results of this hindcast have been archived for a number of grid points close to the U.S. and Canadian coasts.

These hindcasts do not, because of their grid size, include an accurate definition of the shoreline. They also do not include allowance for any shallow water effects, nor do they consider the effect of ice in limiting wave growth. Consequently, they do not provide a reliable definition of the wave climate close to the shoreline or in the presence of ice. The above models are discussed in detail in the following sections.

Both hindcasts required considerable effort in the development and editing of the wind data. They also required very extensive data processing capabilities to undertake the analyses.

While the U.S. Navy and U.S. Army Corps of Engineers hindcasts provide coverage of the North Atlantic, they do not provide similar coverage of the Gulf of St. Lawrence. The U.S. Navy data covers the Gulf of St. Lawrence but it is considered to be unreliable because the grid poorly defines the shoreline.

Other hindcasts have been completed for locations in the Gulf of St. Lawrence and some hindcasts have been undertaken for Lancaster Sound. The major hindcasts are discussed in the following sections.

3.5.1 SOWM Hindcast

The spectral offshore wave model (SOWM) was originally developed by New York University and others for the Fleet Numerical Oceanographic Center in the early seventies.

Since 1974, the SOWM model has been used to provide real-time, twice-daily analyses and 48-hour forecasts for use by the U.S. Navy in the northern hemisphere.

In response to a Seakeeping Workshop in 1975, which highlighted the lack of reliable wave data available for successful ship design, a special project was started to define the wave climate of the major oceans and seas of the northern hemisphere.

As part of this project, a twenty-year (1956-1975) deep-water wave spectral climatology has been developed and published for the North Atlantic. It is these data that are of interest to this study.

The SOWM is described in Lazanoff and Stevensen (1977), as follows:

"The SOWM computes two-dimensional (15 frequencies by 12 directions) wave spectra, using modified Phillips-Miles growth mechanism. Growth is limited by the Pierson-Moskowitz fully developed wave spectrum for the given wind velocity. The wave energy is spread directionally by the technique developed in the Stereo Wave Observation Program (SWOP). Wave energy is propagated across approximately 2000 grid points throughout the North Pacific and North Atlantic Oceans, on an Icosahedral-Gnomonic projection with grid spacing ranging from 160 km to 300 km.

The Icosahedral-Gnomonic projection allows great circles to be represented by straight lines within the triangles. Wave energy dissipation is a function of wind direction (wind direction 180 degrees to the wave energy direction causes the most dissipation), frequency to the fourth power, and energy in the wind sea. The model uses a three-hour time step. The SOWM does not contain any non-linear effects."

The model does not account for wave/wave interactions. There are approximately 450 grid points in the North Atlantic.

The model takes into account the propagation of swell waves. If at the time of the calculation, the locally generated significant wave height at a particular grid point exceeds five feet, swell is propagated in a radial manner until the significant wave height of that train has decreased below three feet. The sea state at any grid point is described by the summation of the locally generated wave spectra plus the incoming swell from all directions.

The validity of any hindcast is dependent on the reliability of the wind velocity input to the model. Lazanoff and Stevenson (1977), describe the development of the wind data for the 1956-1975 northern hemisphere project as follows:

"First, a contract was let to a private company to produce northern hemisphere surface pressure analyses every six hours for twenty years. The surface pressure analyses were derived by using previously completed surface pressure analyses as a first guess and upgrading the analyses with surface pressure and wind velocity observations from the U.S. National Climate Center land and ship data file. The wind velocity data was used to calculate surface pressure gradients. When original surface pressure analyses were not available, the observations were used to produce new surface pressure analyses. The new surface pressure analyses were computed forward in time and were compared to the original surface pressure analyses which were computed backward in time.

An algorithm was developed which computes modified gradient wind velocities, and accounts for air-sea temperature differences for all grid points. The winds were adjusted to an elevation of 19.5 above sea level."

The application of SOWM to the northern hemisphere project (1956-1975), was undertaken by the Fleet Numerical Oceanographic Center.

The SOWM hindcast data set for the Atlantic Ocean has been obtained, archived and processed by MEDS to produce maps of exceedences and extreme events. These maps are presented in section 3.6. Figures 3.1 shows the position of SOWM hindcast points in the study area.

The validity and accuracy of the SOWM model has been discussed by many researchers. It is important that the input wind data, the prediction procedure and the physics be assessed.

A problem with the verification of the SOWM 1956-1975 project for the North Atlantic, is the lack of reliable and long-term wave data measured at offshore locations close to SOWM grid points. In fact, no data that meet these specifications were recorded during 1956-1975 and, consequently, any attempt at verification will be inconclusive.

A number of technical papers discuss the verification of the SOWM 1956-1975 project: Lazanoff and Stevenson (1977), Chen and Hoffman (1979), Cummins and Bales (1980), Bales et al. (1980), and Pierson and Salfi (1978), for example. None of these papers provides systematic and consistent comparison of all available data with the SOWM data. In a discussion of Cummins and Bales (1980), the need for further validation is stressed. However, it is doubtful whether firm conclusions with regard to the reliability of the SOWM 1956-1975 project are possible because of the limited data available for this purpose.

It is important to note that the major investigators, who are affiliated with the U.S. Navy, The American Bureau of Shipping, Hoffman Maritime Consultants Inc. and New York University, without exception enthusiastically endorsed the SOWM 1956-1975 data when discussing the application of these data to ship design and evaluation.

A brief summary of some of the reports describing validation of the SOWM 1956-1975 data for the North Atlantic follow.

Lazanoff and Stevenson, 1977

Lazanoff and Stevenson (1977), in an initial assessment of the 1956-1975 hindcast, noted that the SOWM wind speeds were significantly less than the measured wind speeds in high wind conditions. However, the comparison between SOWM wave height and recorded wave height was much better than the wind speed comparison. The authors stated that, it was likely that there was an error in a wind algorithm and noted that the error would be corrected and the wave climatology would be redone. It is understood (personal communication from Lazanoff) that the wave climatology was not re-hindcast with modified wind data.

Chen and Hoffman, 1979

Chen and Hoffman (1979), make comparisons between the SOWM data and ship-borne waverider data from Weather Station India in the North Atlantic, Weather Station Papa in the North Pacific, and with the staff gauge measurements at Argus Island. Encouraging conclusions were reached as a result of investigating trends in relationships between wind velocity and wave conditions, producing statistical distributions of wind

velocity, significant wave height and average period and by making directional comparisons between measurements and SOWM estimates. Chen and Hoffman (1979) conclude that,

"On the whole, the extensive statistical analysis and the comparison between the measured and hindcast spectral data seem to indicate favourably the accuracy of the SOWM not only in terms of hindcasting the long-term distributions of important spectral parameters such as $H(1/3)$ and $T(z)$, but also in obtaining the general spectral shape for marine structure response calculations."

Bales et al., 1980

Bales et al. (1980), present comparisons between Weather Station India recorded data and the closest SOWM grid point (128), and the results of a comparison of SOWM and SEASAT wave heights. (SEASAT was the first U.S. oceanographic satellite. It used a laser altimeter to measure sea-state.) The conclusions reached by Bales et al. (1980), are as follows:

1. While the hindcast value and an estimate based upon measurements are strongly correlated, the hindcast has a random error with a standard deviation of about 1.4 m over the entire range.
2. For values of less than 1 m, the hindcast tends to underestimate the significant wave heights, but is still subject to about the same standard deviation.
3. The hindcast values do not exhibit any statistical bias with respect to "measured" values, except possibly in the low wave height region.

Cummins and Bales, 1980

Cummins and Bales (1980), note that one of the most serious failings of SOWM is that the detailed structure of a storm may be lost because of the relatively coarse spatial grid. Intense local storms may, for example, be so limited in areas as to be completely missed in the hindcasts. It is likely that for larger storms, the intensity of the storm and the resulting waves will be underestimated as the effect of a coarse grid will underestimate pressure gradients.

Cummins and Bales, 1980, conclude that

"It can be said that the wind and wave parameters (e.g. wind speed, wind direction, and significant wave height) agree well with measurements taken from ships at sea, although they may be slightly displaced in time and space. For purposes of developing a statistical data base, however, this is not considered a problem because what is missed at one grid point, is picked up at another."

Pierson and Salfi, 1978

Pierson and Salfi (1978), compared SOWM predictions with altimeter measurements from the GEOS 3 satellite. They found the SOWM hindcast to be generally lower than the altimeter measurements and that

large differences were due to poor wind field specifications used for the SOWM.

Pierson, 1982

Pierson (1982), evaluated the accuracy of the SOWM model using measurements from spacecraft radar altimeters. Pierson concludes that

"With care in interpretation, a SOWM wave climatology, which is in preparation (the 1956-1975 SOWM project) should prove to be more accurate than those based on conventional ship reports."

In conclusion, it is probable that the SOWM 1956-1975 data for the North Atlantic have, provided a more reliable and complete description of the sea-state throughout the open ocean portions of the North Atlantic than previously available from other data bases. However, it cannot be stated that these data provide an accurate description of the sea-state. The fact that there are many discussions in the technical literature, concerning future changes to the procedures for estimating the wind fields and changes to the hindcast model, demonstrates that improvements could be made to these data. However, it is unlikely that the reliability of the existing SOWM 1956-1975 data will ever be quantified because of the limited recorded data available for verification. The reliability of the SOWM data produced from the operational forecasts can be expected to be less than the SOWM data from the 1956-1975 hindcast because of the lower quality of the wind data.

With regard to the study area a number of specific comments concerning the SOWM data can be made:

- The actual shoreline is poorly defined by the SOWM grid. The grid is in places in the order of one hundred kilometres west of the shoreline. A review of some severe storms shows that winds frequently blow from the west (away from the shoreline) and in reality are limited by the fetch or distance from the shoreline. These storms are without doubt significantly overestimated by the SOWM data.
- SOWM data in the northern part of the area are incorrect during the winter (January to May) because the presence of ice was not considered in the model.
- In the central part of the area around Hibernia the data may be invalid during March and April because of ice.
- SOWM does not consider the effects of bathymetry or currents or the wave data. This question is discussed further in section 5.1 and is particularly important at the Scotian Shelf (bathymetry) and in the Labrador Sea (currents).
- In general it is concluded that the SOWM data provide a poor definition of the wave climate of the study area. It should be noted that these comments apply for the study area and do not apply to the open ocean.

3.5.2 WIS Hindcast

In 1976, a study to produce a wave climate for U.S. coastal waters was initiated at the U.S. Army Engineers Waterways Experiment Station (WES).

This Wave Information Study (WIS) involved a numerical hindcast of deepwater wave data for the North Atlantic from historical surface pressure and wind data. Development of the hindcast procedure, input data files and data presentation format, is described in a series of reports (Corson et al, 1981 and Corson and Resio, 1981). The objective of the WIS study was to provide a coastal wave climate and consequently data at all grid points throughout the North Atlantic have not been archived. Development of the historical wind field data from several pressure data sources is described in Corson et al (1981). The development of the hindcasting procedure involving wave energy propagation, dissipation and generation is described in Corson et al (1981). The hindcast produces a directional wave spectral climatology at three or six-hour intervals on a grided system. At present, 20 years of wave data have been hindcast for grid locations along the U.S. Coastline and east coast of Canada.

The WIS study covers the same period of time (1956-1975) as the SOWM study. It appears that the WIS hindcast benefited from some of the possible limitations of the SOWM study and, consequently, has the following features:

- Considerable effort was put into defining the overwater wind field particularly close to the shoreline of the United States.
- A finer grid than that used in the SOWM model was used to define wind fields during storms.
- The hindcast model contains allowance for some phenomena, such as wave-wave interaction that are not included in the SOWM model.

MEDS has acquired the WIS data for the 14 grid points in the vicinity of the study area. The data have been archived and processed to produce maps of exceedences and extreme events. These maps are presented in section 3.6. Figures 3.1 shows the WIS hindcast points in the study area.

Partial verification of the WIS hindcast has being undertaken. Preliminary results of the hindcast verification are provided in Corson and Resio (1981) and Resio (1982). Based on a comparison of available recorded and hindcast wave data for the Grand Banks and Scotian shelf areas, Baird and Readshaw (1981) concluded that the WIS hindcast data may not provide an adequate description of the wave climate in these areas. Some of the identified limitations included poor definition of some storms and an inaccurate description of the shoreline by the grid. However the limited availability of recorded data did not permit firm conclusions to be drawn.

Resio (1982) also assessed the validity of the WIS hindcast wave data in the Scotian shelf, Grand Banks and Labrador Sea and concluded that problems with the hindcasts of severe storms could be encountered due to the pressure grid specifications for the area. He also concluded that the WIS hindcast was a good first approximate but that the 20 to 30 largest storms should be rehindcast for design wave calculations.

It cannot be concluded unequivocally at this time whether or not the WIS data provide more or less reliable information than the SOWM data. However the WIS model has the advantage of having been developed after the SOWM model and may have benefited from the additional knowledge available. It is also likely that the WIS study was undertaken with significantly improved wind data than was used for the SOWM study. The shoreline is not well described by the WIS grid, but the WIS grid provided a better fit than does the SOWM grid.

In summary and with regard to the study area a number of specific comments concerning the WIS data can be made.

- The data is probably more reliable than the SOWM data.
- The WIS data may overestimate or underestimate the magnitude of some storms because of incorrect definition of the shoreline.
- The WIS procedure did not consider ice and therefore is unreliable in northern areas from January to May and in central areas in March and April.
- The WIS procedure did not consider bathymetry or current effects (see discussion in 5.1).
- In general it is concluded that the WIS data provide a reasonable description of southernly areas because of the improved definition of storms. However, the data still have limitations in areas of shallow water or close to the grid boundary. The data are not sufficiently reliable for the estimation of extreme events (100 yr storm etc.)

3.5.3 MEDS Hindcasting System

Development of the MEDS hindcasting system was undertaken following review of the WIS hindcast. It uses the same wave model as the WIS but includes improved techniques for developing the wind fields and has a grid designed to provide a better fit to the Canadian shoreline.

This MEDS hindcast system is in a developmental stage and has the objective of providing MEDS with a reliable hindcasting capability to evaluate other hindcasts. The capability can also be used to hindcast the most severe storms in an area to arrive at an estimate of the design wave height.

There are no plans at this time to use the hindcast capability to produce another 20 or 30 year data set over large portions of the east coast. Such a project would be well beyond the resources of MEDS.

It should be noted that this is also a deepwater hindcast model and that suitable techniques to bring deep water waves into shallow water are only in the early developmental stage in MEDS. The model does not at present consider ice or currents.

For the limited comparisons to measurements which have been made to date the MEDS hindcast model has performed well on estimating the wave height. The wave periods have not been determined to be as reliable.

3.5.4 Oceanweather Inc. Hindcast for Mobil Canada Ltd.

This study had the objective of determining the extreme wave conditions required for design of structures for the Hibernia area, Oceanweather (1982).

The wind field describing twenty of the most severe storms occurring during the period 1950 to 1980 were defined using archived weather maps and ship observations. The wave hindcast model driven by this wind data was based on a model developed for the Ocean Data Gathering Project, Cardone et al (1976).

The study was undertaken because Mobil considered that the data previously used by them (from the U.S. Corps of Engineers WIS) had a number of limitations. The improvements in the Oceanweather Inc. study, compared to the WIS study were as follows:

- smaller grid. The grid was approximately 150 km compared to 180 km in the WIS.
- selection of storms from a longer time period. The time period was 30 years compared to 20 years in the WIS.
- improved input wind data.

The Oceanweather Inc. study was verified by comparing the results of the hindcast for two storms during which recorded wave data had been obtained. Oceanweather (1982) reports that in one storm the model predicted a significant wave height of 11.3 m, compared to a measured value of 10.1 m. In the second storm the model predicted 8.9 m compared to a recorded value of 8.7 m.

The following summary of the Oceanweather Inc. study is extracted from Oceanweather (1982).

"A new description of the extreme wave climate in the resource exploration area east of Newfoundland (Hibernia) is derived through the application of hindcast techniques.

The study began with the assembly of a comprehensive array of historical data including: archived synoptic weather maps and enhanced ship data collections covering the period 1899-1980; monthly sea-ice concentration data commencing in 1953; results of recently completed U.S. government sponsored hindcast studies covering the period 1956-1975; Canadian government ment wave analyses covering the period 1970-1979; published climatological summaries and studies.

Extreme wave events were found to be associated with the extratropical cyclones which, in general, formed near the U.S. East Coast, underwent rapid intensification while they moved north-eastward and passed within about 300 km of Hibernia with forward velocities less than the climatological average of cyclones in the area. The most extreme storms tended to pass to the west of Hibernia, deepen explosively (central pressure fall of more than 24 mb/day) and decelerate. Because of the proximity of Hibernia to the preferred area

of maximum deepening rate and the relatively small spatial scale of such storms, reliable identification of top ranked storms and specification of surface wind fields required ship report coverage available only within the past 30 years. Thus while a list of severe historical storms over the 50-year period 1930-1980 was prepared, the 20 storms hindcast were selected from a reduced storm population covering the period 1951-1980.

The file of historical surface ship data acquired in this study was found to provide more than twice the data density achievable in real time. Detailed post-analysis techniques were applied to each storm to provide surface wind field descriptions of considerably greater accuracy than may be derived from archived surface weather maps alone. It is estimated that errors of about ± 2 m/sec in speed and $\pm 20^\circ$ in direction have been achieved in this study and that windspeed errors in areas of strong wave generation are unbiased.

A calibrated spectral wave specification model, which has been shown in previous studies to provide hindcasts of high accuracy in tropical and extratropical cyclones, was adapted to the Atlantic Ocean on a grid of 81 n.mi. spacing at the latitude of Hibernia. That spatial resolution allowed much more accurate representation of fetch restrictions by coasts and sea-ice than was possible in previous studies.

A comparison of hindcasts and measurements at Hibernia in two of the 20 storms hindcast showed model predictions of peak storm sea states to be accurate to within 1m in $H_{1/3}$ and 1 sec in spectral peak period, T_p . Those errors probably characterized the hindcast wave series of $H_{1/3}$ and T_p generated in this study.

An extremal analysis of the hindcast wave series at seven grid points revealed the presence of a large spatial gradient in the extreme wave climate east of Newfoundland. The most appropriate value for the 100 year return period maximum wave height near Hibernia was found to be 30 meters, with an associated period of about 16 seconds."

The authors are unaware of any independent assessment of this hindcast by other workers. The data remain confidential to Mobil Oil, and while they have very kindly been made available to this study, they are not as yet in the public domain.

The authors have conducted a limited assessment of the dataset with the following results.

- This would appear to be the best hindcast undertaken to date. It is unfortunate that it covers only one small part of the study area.
- This hindcast has major advantages in that it includes the ice edge and has a finer grid designed to provide a good representation of the shoreline.
- Based on the two storms for which measured data were available the model provided reliable estimates of wave height and period.

- Unfortunately other storms for which measurements were available were not hindcast to provide further verification of the model.
- There is a substantial question, however, about the storm selection procedures. Some storms used appear to be less severe than the one year storm. Since 20 storms were selected over a 30 year period one must question whether the most severe storms were used.
- Also the study used storms for which the wave growth was fetch limited by the coast of Newfoundland and presumably, although we did not examine such a case, by the ice edge. The suitability of using such a mixed storm population in extreme value analysis is questionable.

3.5.5 Group Five Hindcast for Total Eastcan

This study was undertaken in 1978 for Total Eastcan Exploration Ltd., then operator for the Labrador Group, by Group Five Consulting (1978). In this study extreme statistics for four locations in the Labrador Sea are presented. These data were hindcast with a parametric model using boundary layer wind velocities determined from isobars contained on synoptic weather maps. The maps used covered all severe storms that occurred between July 1 and December 31 during the years 1970 to 1976.

The four locations for which extreme wave statistics were determined are shown in Figure 3.1.

Comparisons were made between the hindcast data and the three major storms that had been recorded in the Labrador Sea (October 1975, October 1976 and October 1977). These comparisons may be described as excellent (1977), fair (1976) and poor (1975). A major limitation of this study is the small sample of seven years from which extreme events were estimated. The event with a return period of one hundred years cannot be reliably estimated from this sample. Unfortunately, the problem of very limited reliable meteorological and ice cover data suitable for wave hindcasts will exist with any study of the northern part of the study area. However, a study completed in 1984 could work with twice the data that were available in 1976.

3.5.6 Department of Public Works Hindcast

A wind-wave hindcast was undertaken by Department of Public Works, Baird (1978), to define the wave climate at four locations in the Gulf of St. Lawrence. Sixteen years of hourly values of significant wave height and peak period were hindcast using a parametric model and wind data recorded at Grindstone Island. The study was undertaken for the Transportation Development Centre as part of the Gulf Corridor Study, Baird (1978).

The location for which wave statistics were determined are shown in Figure 3.1.

A more accurate hindcast of the Gulf of Saint Lawrence could undoubtedly be completed if more complete descriptions of the wind fields were developed. The available data may be suitable for preliminary assessments of operations close to the location for which the data were hindcast. The data are now only available in the form of scatter diagrams and have very limited use for the estimation of extremes.

3.5.7 AES Hindcast in Lancaster Sound

The Atmospheric Environment Service (AES) have developed a wave climate for three locations in Lancaster Sound, Lachapelle (1981), Lachapelle and Maxwell (1983).

The geostrophic equations were used to obtain wave data from 33 years of gridded 6-hourly sea level pressure data compiled by the Fleet Numerical Oceanography Center in Monterey, California. Hourly wind values were obtained by linear interpolation of the 6-hourly components of the pressure gradient. The 21-year wave hindcasts were based on the Bretschneider equations using geographical features and available minimum monthly ice conditions to limit the fetch (Lachapelle, 1981). The hindcast covers the period June to October.

AES state that the data provide a first guess estimate of sea state conditions in Lancaster Sound. Minimum ice conditions were specified in order to provide results which would approximate the high extremes of the wave climatology of the area (Lachapelle, 1981).

3.6 Comparison of the Existing Data

The existing datasets providing coverage of the study area are assessed in section 3.5. In this section various presentations of these data are provided to allow comparison of the data.

The presentations include the following information, where the available data permits:

1. Estimate of the maximum value of the significant wave height with a return period of 100 years. Figure 3.9.
2. Estimate of the maximum value of the significant wave height with a return period of 20 years. Figure 3.10.
3. Value of the significant wave height that is exceeded for 10 per cent of the time during the year. Figure 3.11.
4. Value of the significant wave height that is exceeded for 50 per cent of the time during the year. Figure 3.12.
5. Value of the significant wave height that is exceeded for 90 per cent of the time during the year. Figure 3.13.

The following comments are pertinent to these figures.

Extreme Value Analyses

The estimates shown in Figure 3.9 and 3.10 were calculated as follows:

SOWM

Fisher-Tippet Type I distribution. Data used were annual maximum significant wave heights (1956-75).

WIS

Fisher-Tippet Type I distribution. Data used were annual maximum significant wave heights (1956-75).

METOC


Fisher-Tippet Type I distribution. Data used were annual maximum significant wave heights (1970-80).

MOBIL


Fisher-Tippet Type I distribution. Data used were significant wave heights from 18 storms hindcast to occur in the period 1950 to 1980.

TOTAL EASTCAN


Fisher-Tippet Type I distribution. Data used were maximum significant wave heights from more than 80 storms hindcast to occur in the period 1970 to 76.

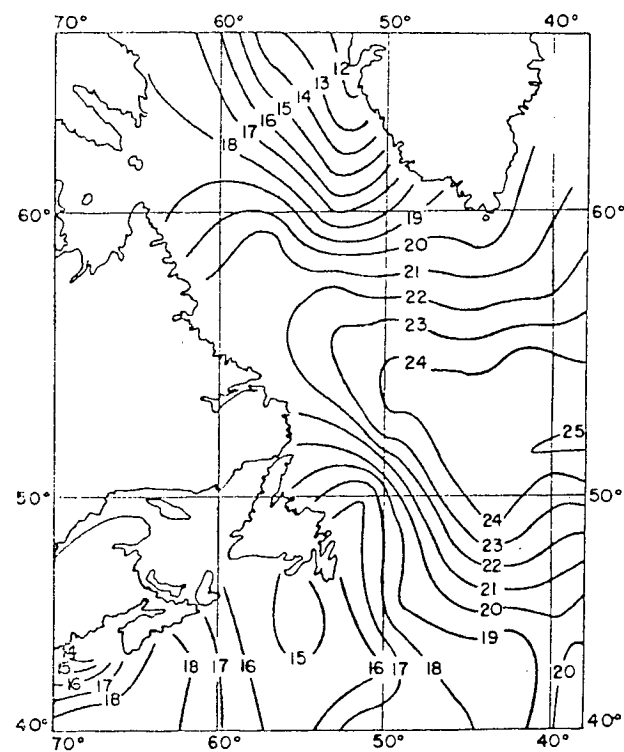


SOWM HINDCAST WAVE DATA

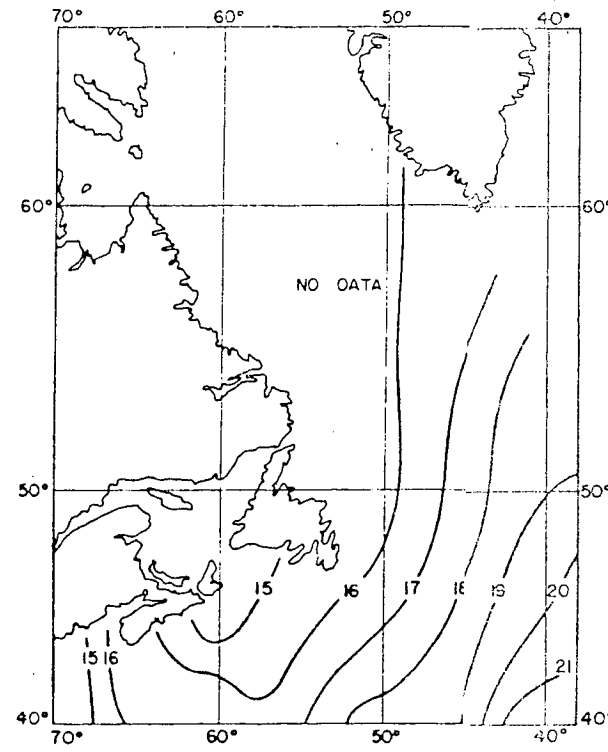


WIS HINDCAST WAVE DATA

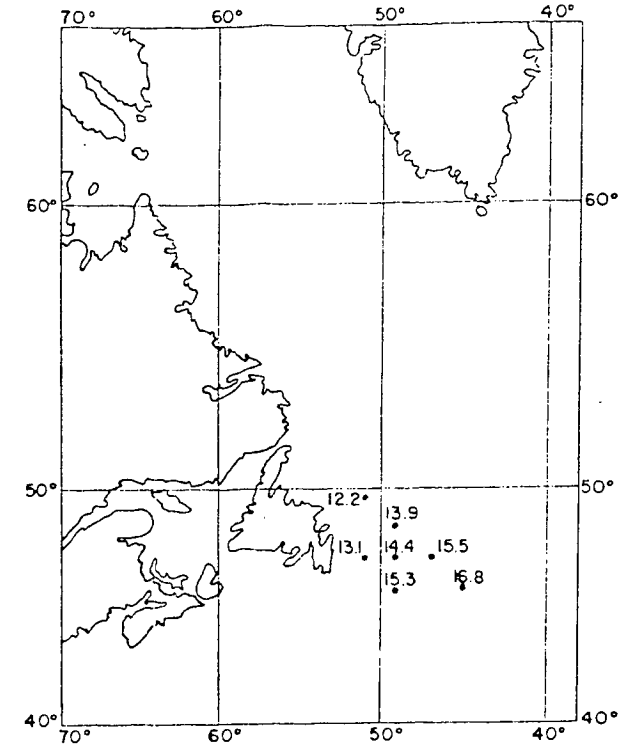


MOBIL WAVE DATA

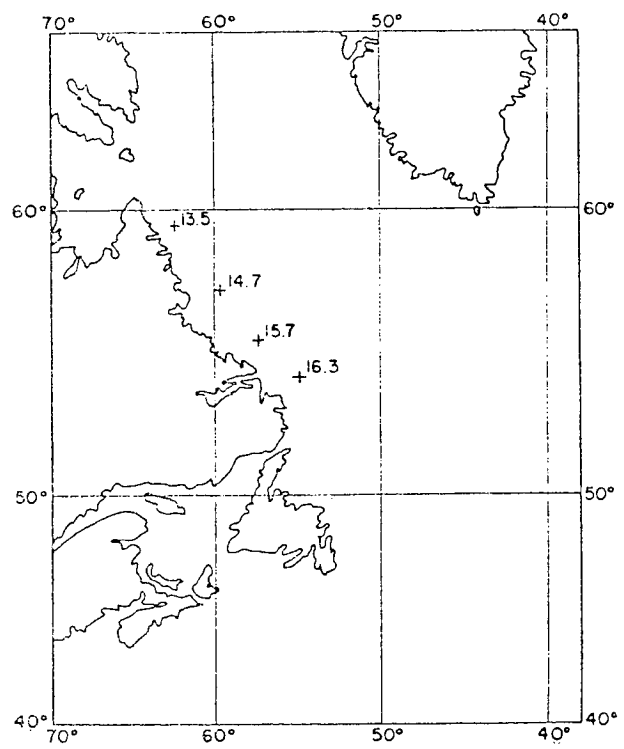

TOTAL EASTCAN WAVE DATA

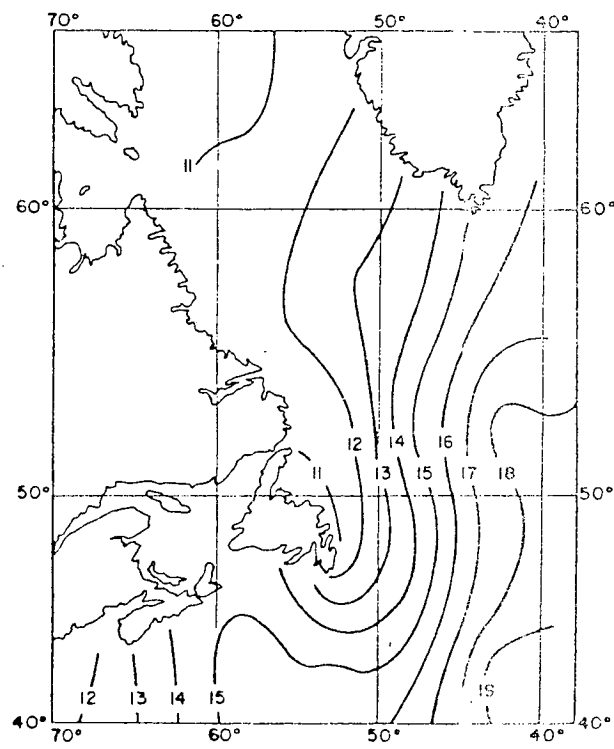


METOC WAVE DATA

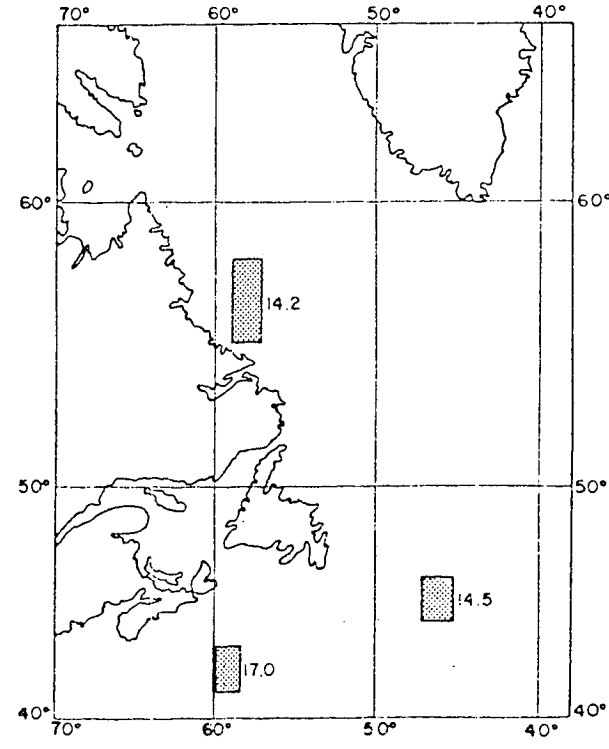


NMIMET WAVE DATA

SIGNIFICANT WAVE HEIGHT (M) WITH A RETURN PERIOD OF 100 YEARS


Figure 3.9 Estimate of the maximum value of the significant wave height with a return period of 100 years.

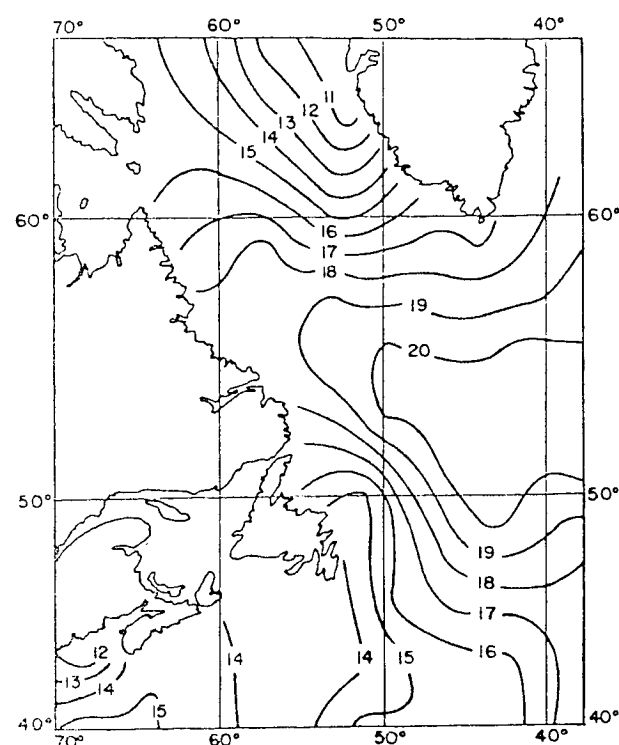


SOWM HINDCAST WAVE DATA

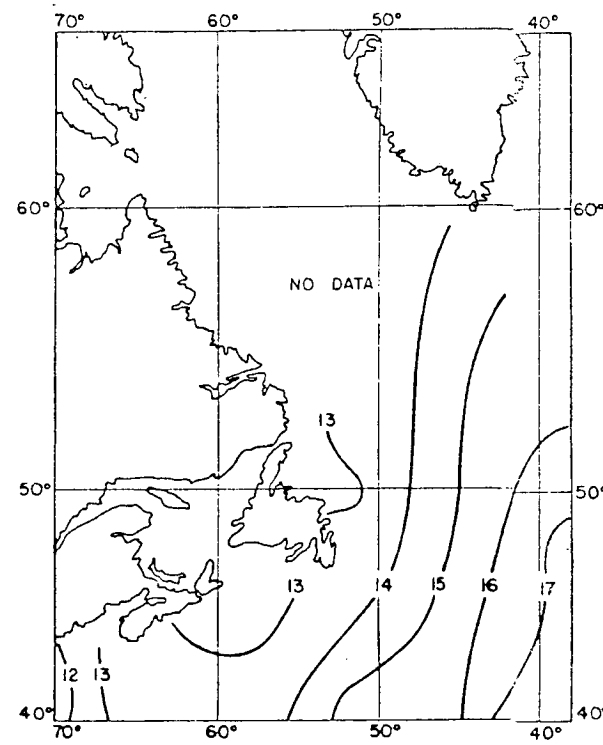


WIS HINDCAST WAVE DATA

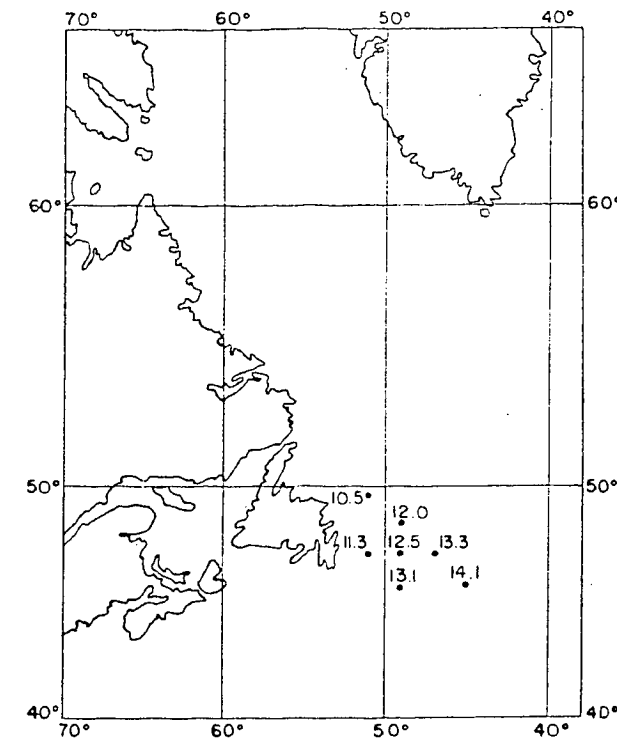


MOBIL WAVE DATA

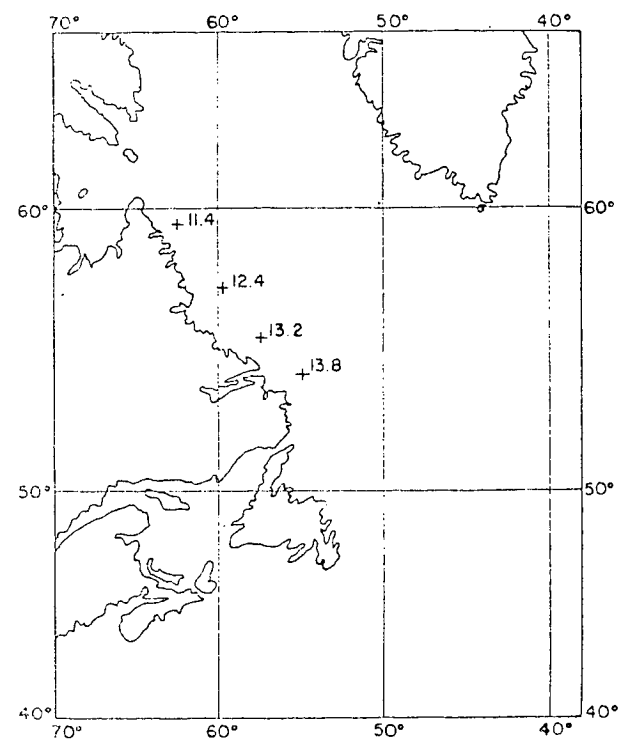

TOTAL EASTCAN WAVE DATA

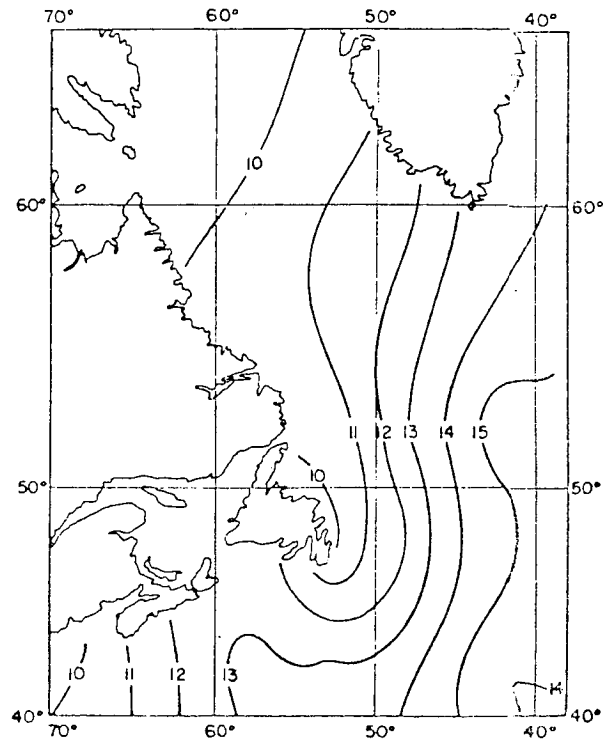


METOC WAVE DATA

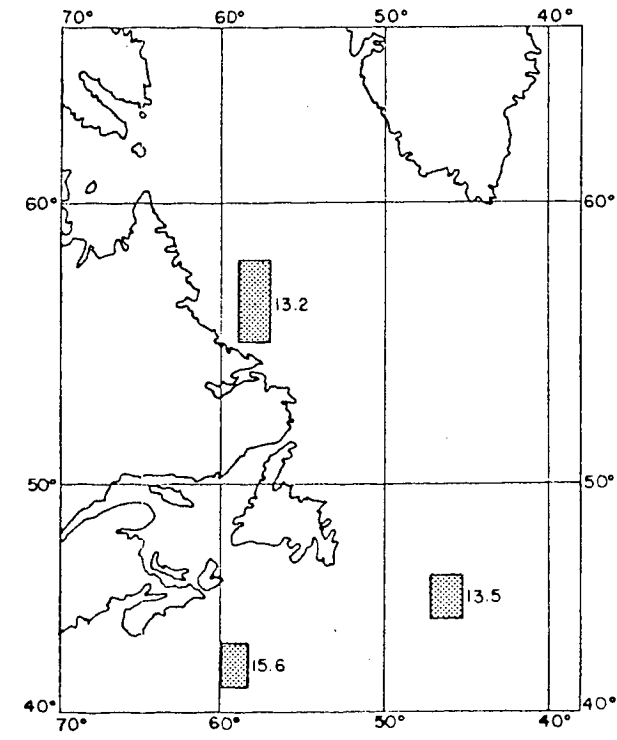


NMIMET WAVE DATA

SIGNIFICANT WAVE HEIGHT (M) WITH A RETURN PERIOD OF 20 YEARS


Figure 3.10 Estimate of the maximum value of the significant wave height with a return period of 20 years

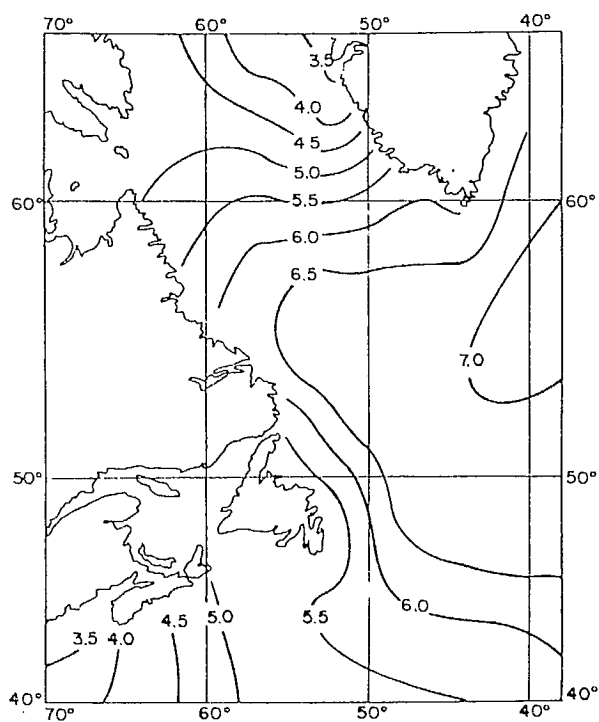


SOWM WAVE DATA

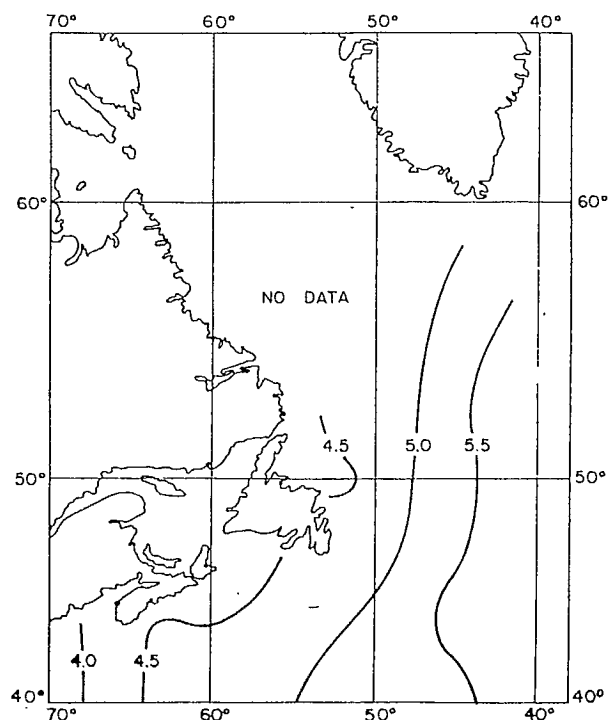

WIS HINDCAST WAVE DATA

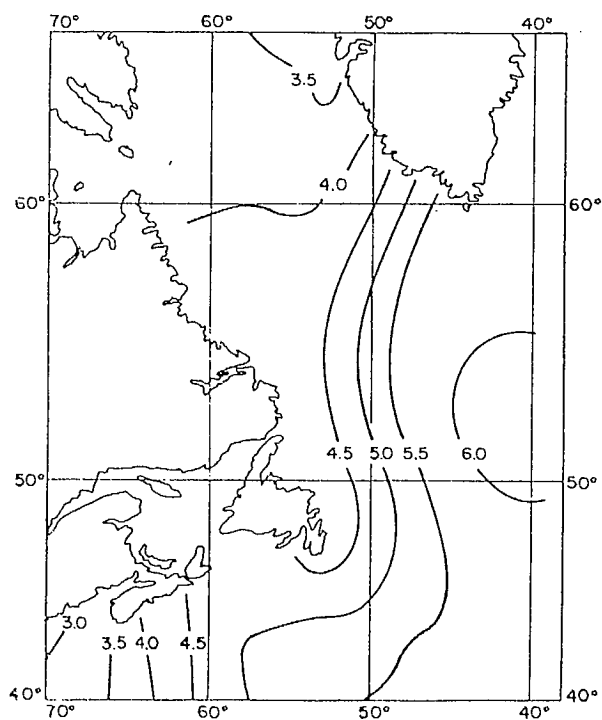


METOC WAVE DATA

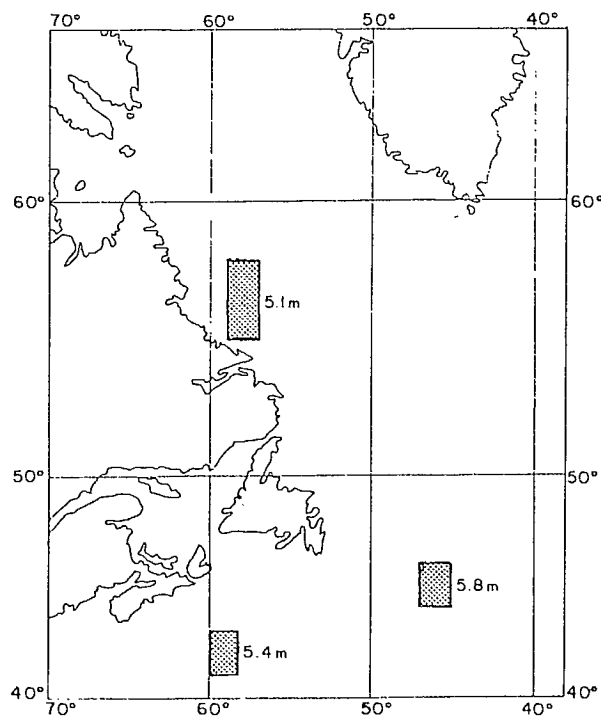


NMIMET WAVE DATA

SIGNIFICANT WAVE HEIGHT EXCEEDED FOR 10 PER CENT OF THE YEAR


Figure 3.11 Value of the significant wave height that is exceeded for¹

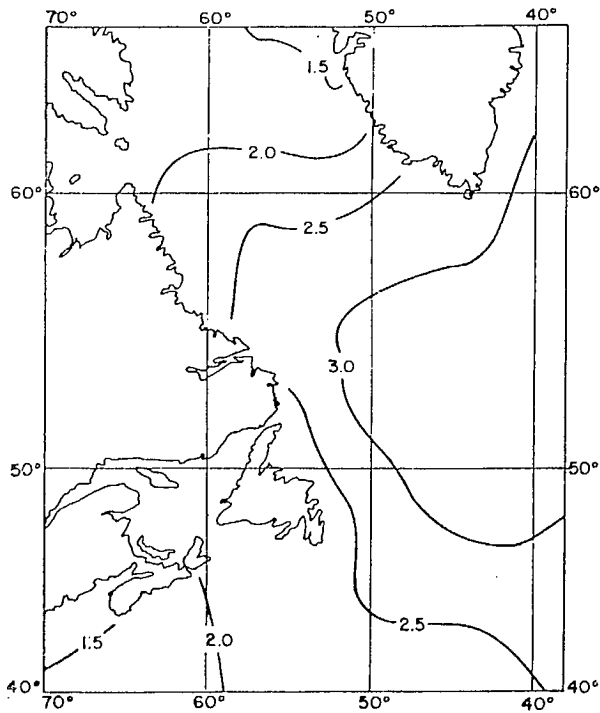


SOWM WAVE DATA

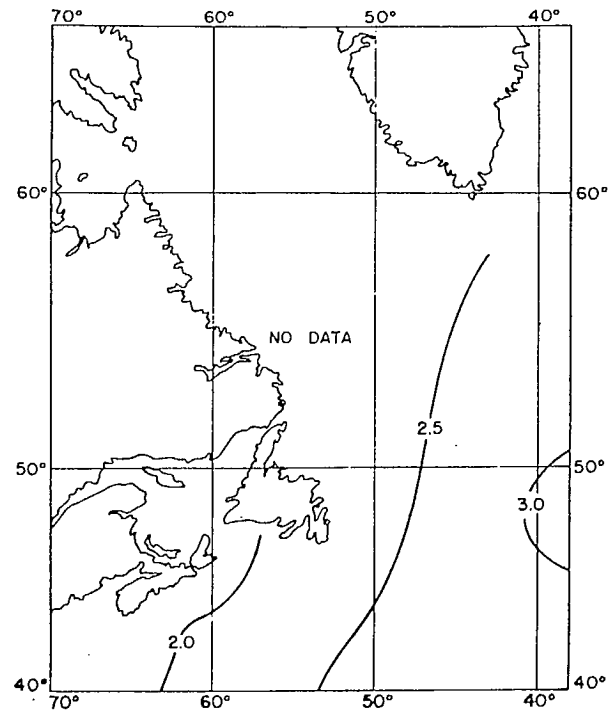

WIS HINDCAST WAVE DATA

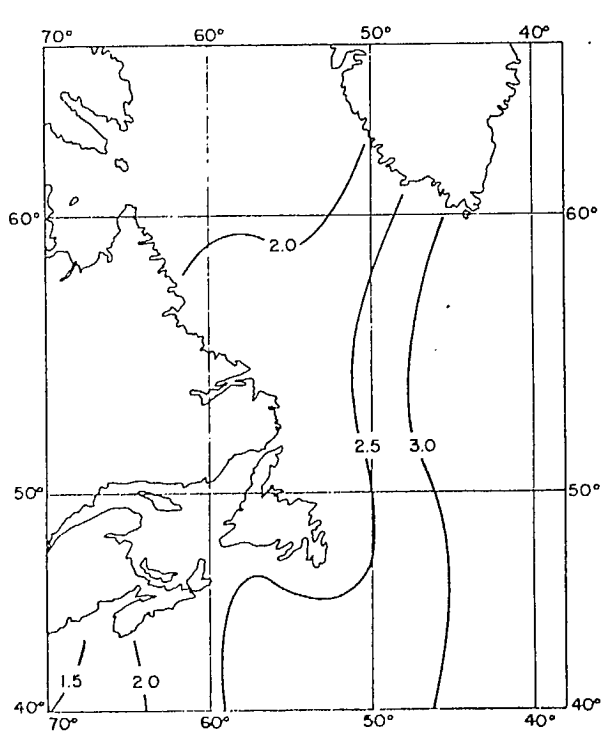





METOC WAVE DATA

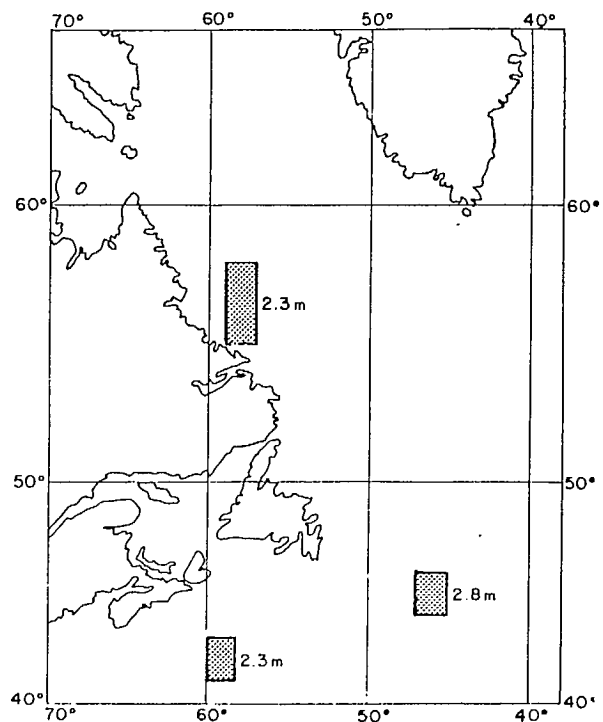

NMIMET WAVE DATA

SIGNIFICANT WAVE HEIGHT EXCEEDED FOR
50 PER CENT OF THE YEAR

Figure 3.12 Value of the significant wave height that is exceeded for

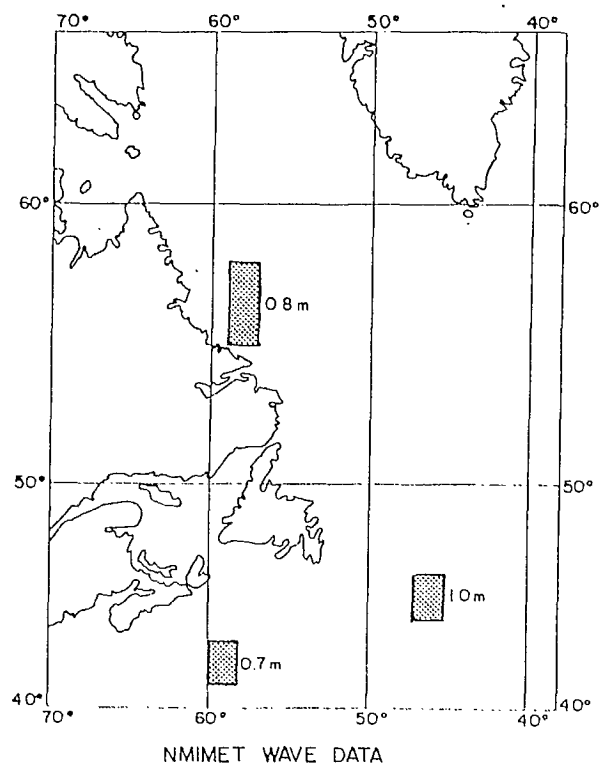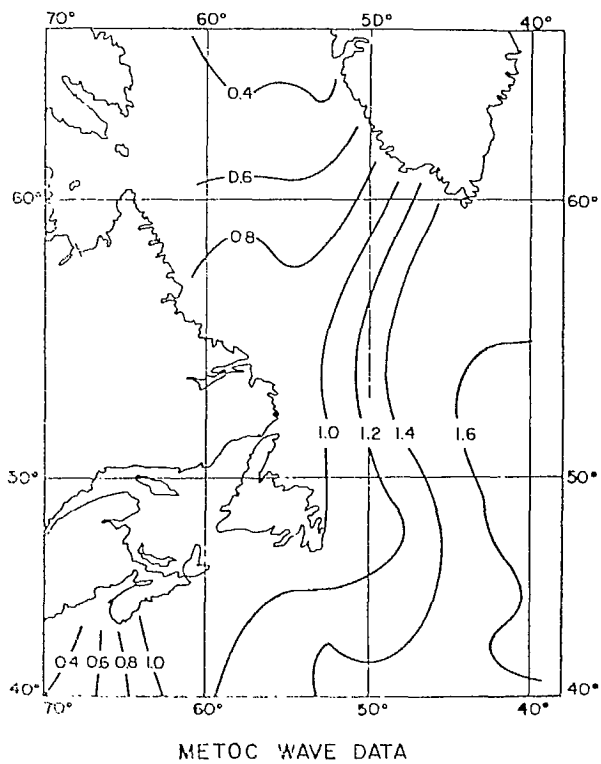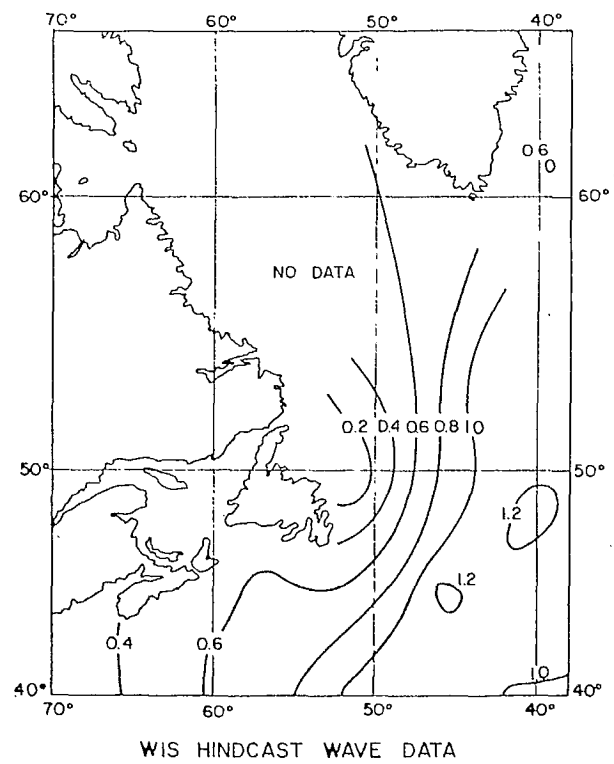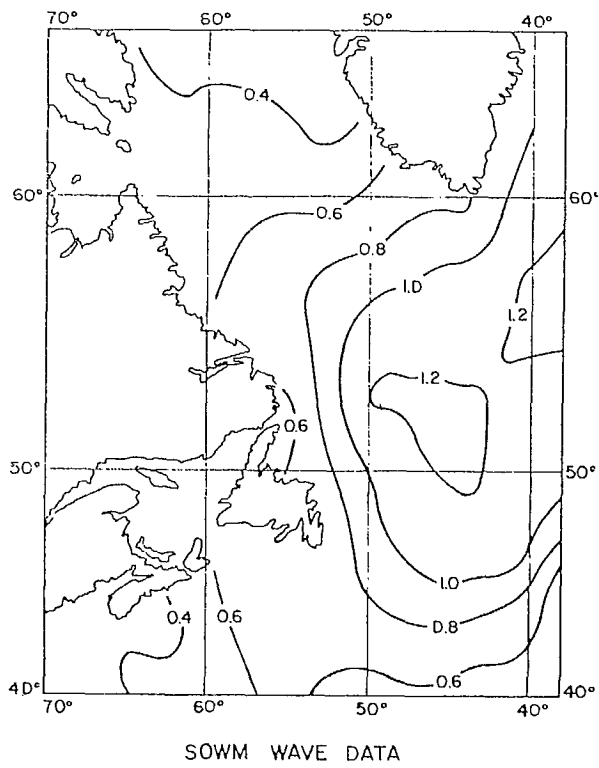

SIGNIFICANT WAVE HEIGHT EXCEEDED FOR
90 PER CENT OF THE YEAR

Figure 3.13 Value of the significant wave height that is exceeded for

NMIMET

Weibull Distribution of all observations made in the period 1949 to 1981 (southerly locations) or 1957 to 1981 (northerly location) with 20 year return period event assumed to have a probability of occurrence of 3.43×10^{-5} and 100 year return period event assumed to have a probability of occurrence of 6.87×10^{-6} . There were 293 observations available for the northern location, 4957 observations near Hibernia and 2346 observations for the location near Sable Island.

The figures show an estimate of the extreme events and do not provide any information on the expected reliability, error or confidence in these estimates.

The objectives of these figures are to demonstrate the large variation in the extreme wave conditions that occurs throughout the study area (that is shown by all the datasets), and also the large variation in estimates between some of the datasets.

These presentations should not be used for design purposes. It is concluded that all of the datasets, with the possible exception of the Mobil data, are inaccurate and insufficiently reliable for the estimation of extremes.

As is discussed in section 3.7, any accepted data set should be extrapolated using a number of different procedures and careful considerations given to the confidence in any one estimate. Even with the Mobil data using the Fisher-Tippet Type I extreme value distribution, Oceanweather (1982) conclude that in 90 per cent of extrapolations the true value of the 100 year return period significant wave height would lie within approximately 16 percent of the presented value, i.e. approximately ± 2.4 m.

Wave Climate Statistics

The estimates shown in Figure 3.11, 3.12 and 3.13 were prepared from tables showing the percentage of all records that exceed selected values of significant wave heights.

These figures also show the variation in the wave climate throughout the study area. However, the variation between the results obtained with the different datasets is not as dramatic as it is for the extreme values.

For the purpose of analysing operations considerable additional information, such as persistence statistics, average durations of storms and fair weather, may be required. In addition, it may be particularly important that corresponding data describing winds, currents and other meteorological conditions be available and be analysed with the wave data for the prediction of downtime.

It may be argued that wave data by themselves do not satisfy the requirement for design. The value of the data is very significantly increased if corresponding wind and current data are also available.

3.7 Discussion of Extreme Value Analysis

The problem of extrapolating a time series of a given parameter to estimate the largest value that the parameter is likely to take in a given period of time is a major theoretical and practical problem. There are in general two categories of procedures which are used for this purpose.

The first category fits a statistical distribution function to all observed values in the time series. In the case of wave height, the log-normal or Weibull distributions are most frequently used. The distribution is then used to extrapolate to extreme events. This may violate the basic assumptions of the distribution. At best, it can only be shown empirically that the distribution fits the data over the range of observed values, but no conclusions can be drawn about values which have not been observed.

The second category is based upon the statistics of extreme events in a time series. In this case, the largest observed values (in the case of waves, the largest values would be peak storm wave heights) are selected and fitted to various probability distributions. This procedure, using the statistics of extremes, has a somewhat more solid basis in mathematical theory. If it can be assumed that the storms are drawn from a stationary, single population and are independent in the statistical sense, then the extremes should be distributed according to parameters which may be evaluated from the observed population. Most of the latest work on extreme value determination is based on this approach.

In the proceeding section an analysis of several datasets is presented to intercompare the predicted extremes. This second technique was used in its simplest form. That is, the Fisher-Tippet type I distribution was used on the observed annual maximum wave height from each dataset. This is not to be considered an endorsement of this procedure. It was used for demonstration purposes only to show the differences between extreme values from different datasets. In fact the authors believe more recent procedures using the largest wave heights from all severe storms regardless of year of occurrence to be more appropriate.

The underlying objective of the use of extreme value distributions is to develop a description of the total population of all storms and then reliably estimate the magnitude of the one storm which should occur at a specific interval of time e.g. once every 100 years. This concept of a return period is purely a statistical one and it should be realized that the event may not occur in the lifetime of a generation; it may also occur several times.

This discussion is concerned with fitting an extreme value distribution to recorded, hindcast or ship observation data and then extrapolating the distribution to determine extreme waves for a given return period. This is the basis of most procedures used by the oil and gas industry to determine extreme wave conditions. Typically, this procedure is initiated with a small sample of storms from some underlying population of all storms. The sample consists of those storms which have actually occurred over the period of recording, hindcast, or observations and which have been selected using a procedure considered to be appropriate (there are many procedures).

Figures 3.9 and 3.10 described in section 3.6 present estimates of extreme wave conditions (return periods of 20 and 100 years) throughout the study area that are based on six different sources of data. There is considerable difference between these results, because of the difference in the data. Considerable differences between estimates of extreme values obtained from one data set may also occur depending on the methodology followed to produce the estimate. The objective of the following discussion is to review the following:

- i) The estimate of the extreme event depends on the data that is selected for fit to the extreme value distribution (i.e. on the procedure used to select the data).
- ii) The estimate of the extreme event depends on the extreme value distribution selected to extrapolate the data.
- iii) The estimate of the extreme event also depends on the method of fitting the distribution selected to the data and on the procedure used to estimate the frequency of occurrence (or plotting position) of the known events.
- iv) There is considerable uncertainty in the prediction of events with long return period. Predictions should provide an estimate of the expected reliability of the extreme event by expressing a range of values in which the event is expected to lie.

Alternative methods of estimating extreme events have been proposed. One method is based on a study of storm types and involves the definition of a "project storm" that has a defined probability of occurrence. There are as many problems associated with this approach as there are with the above methods of extrapolation. The method is not known to have been used for the study area, although preliminary studies are underway in selecting and describing historical storms.

Selection of Data

The data used for the extreme value analysis undertaken and shown in Figures 3.9 and 3.10 were the annual maximum significant wave heights.

This is a fairly common procedure that has its origins with the prediction of spring floods where it is generally true that only one event occurs each year. Clearly this is not the case with storms, several severe storms may occur in a single season, and it is possible that the second most severe storm in a year, which is ignored in this analysis, would be more severe than the largest in another year.

Other methods of selecting data include the following:

- i) Maximum significant wave height associated with all storms. Alternatively the significant wave heights may be selected only if they exceed a threshold level, or by month or season.
- ii) Use of all data. Many organizations have fitted some distributions to all data. While a selected distribution may be found to fit most of the data,

it is unlikely that the same distribution will fit the population of extreme events.

Extreme Value Distributions

In Figure 3.14 the annual maximum significant wave heights are fitted to six different extreme value distributions. All of these distributions have been proposed in technical papers for fitting to events occurring in nature where extreme events are to be estimated. Other distributions exist. There is no objective theoretical or practical basis by which to select one distribution over another. It is not the intent of this report to discuss these distributions. However, it is important to note that use of these extreme value distributions assumes that the population from which the data are selected is stationary, identically distributed, and independent. In addition, the number of storms in one sample should be large. These assumptions may be valid, but to varying degrees. In general the number of samples is small, and it is easy to realize that one could just as likely observe a significantly different sample over a time period shifted only a small amount in time. This variability in the sample will significantly affect the resulting definition of the population described by the extreme value distribution. It may also be demonstrated that the storms in the study area have different origins or are of different types and are, therefore, from different populations.

Determination of frequency of occurrence of selected data

The frequency of occurrence, or plotting position, assigned to each wave height in the selected sequence can be calculated using a number of different methods. A subjective choice of method must be made. The choice of plotting position may influence the evaluation of the goodness of fit of the selected distribution to the data.

Estimation of parameters for fitting a distribution to the data

The parameters of a distribution are estimated using one of the following methods:

- 1) linear regression
- 2) method of moments
- 3) method of maximum likelihood.

There is no consensus regarding the most appropriate method. As illustrated in Figure 3.14 the estimate of the extreme event depends on the method selected.


Confidence limits

Once an estimate has been made it is only known to a certain level of confidence. This confidence is the combination of considerations including:


- a) uncertainty in the procedure used to select the individual data points.
- b) uncertainty due to the small size of the sample.
- c) uncertainty due to the assumption that a particular distribution may describe the total population.

Station: wes g6


Type I

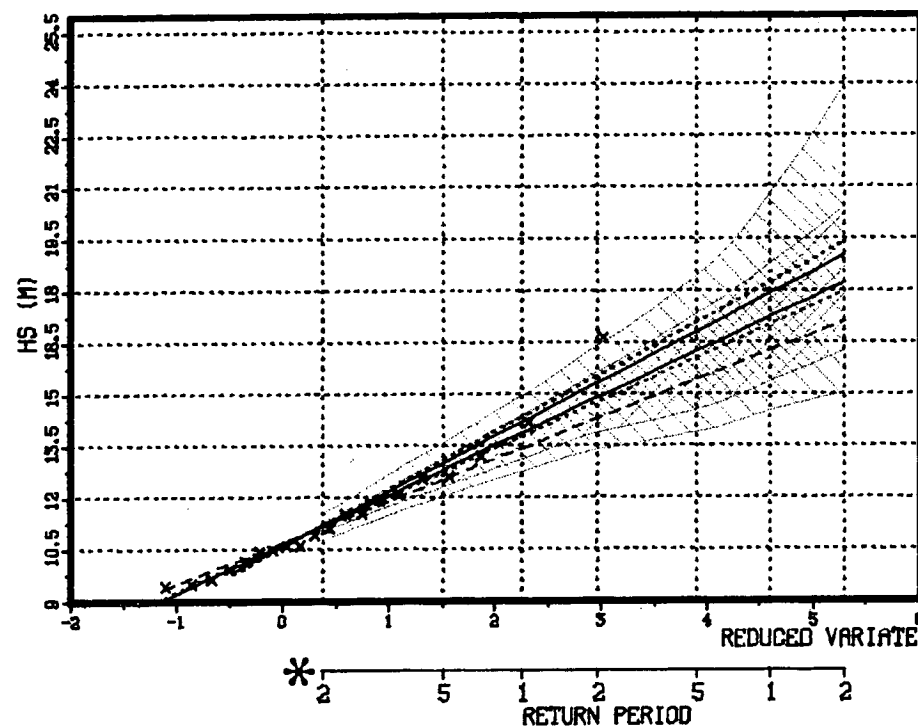


Type II

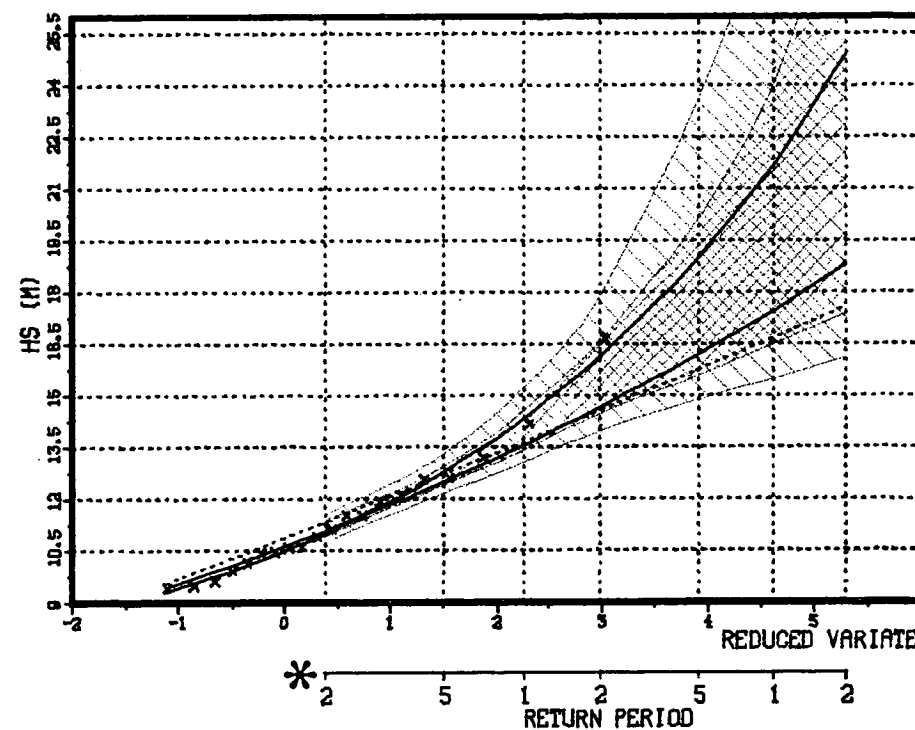


Type III

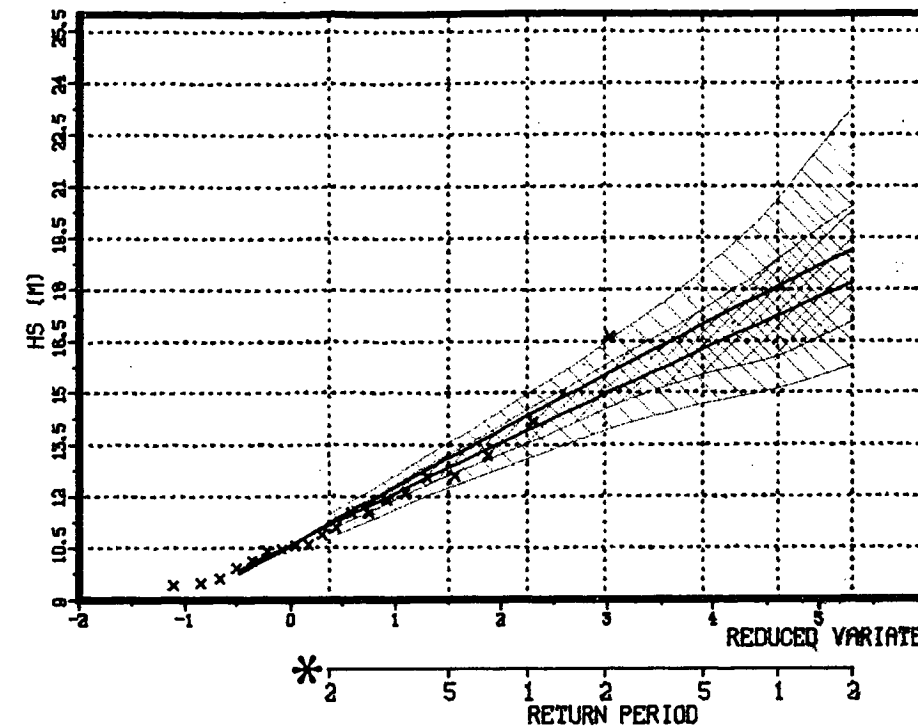


Pearson III

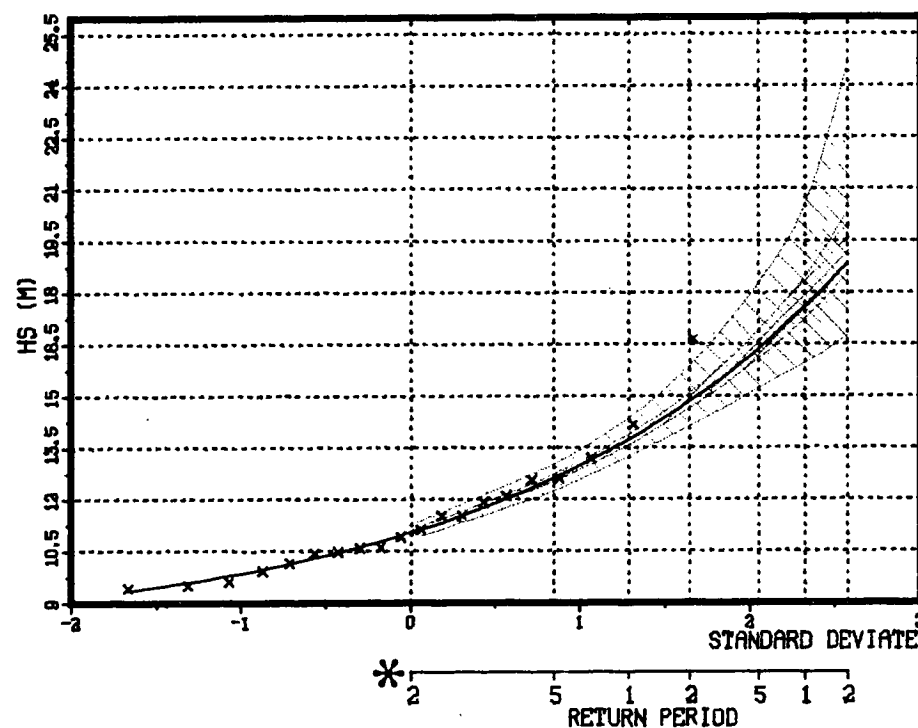

Log-Normal

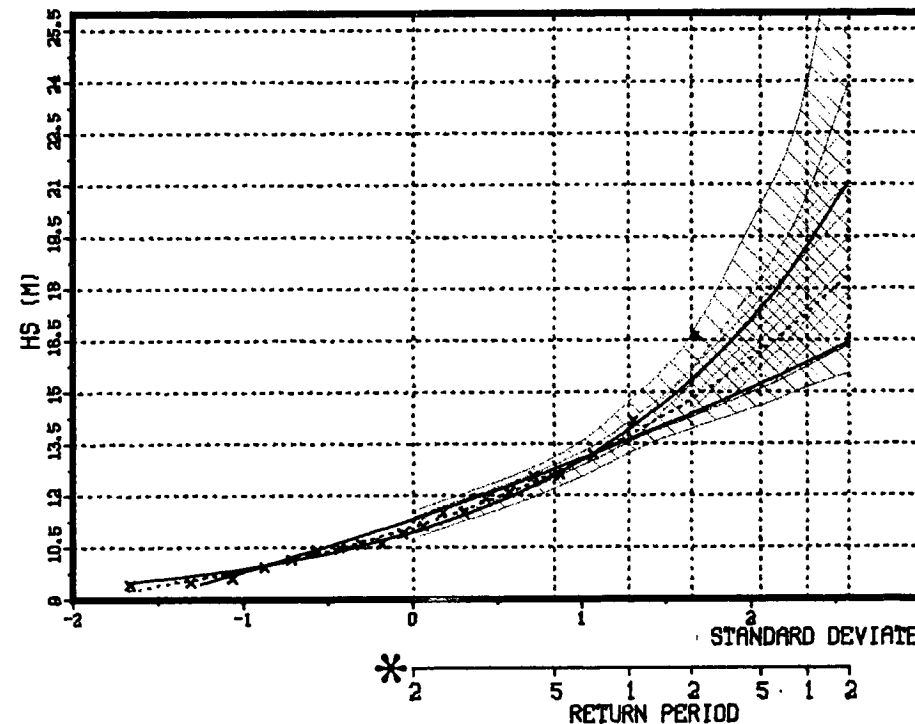

Weibull

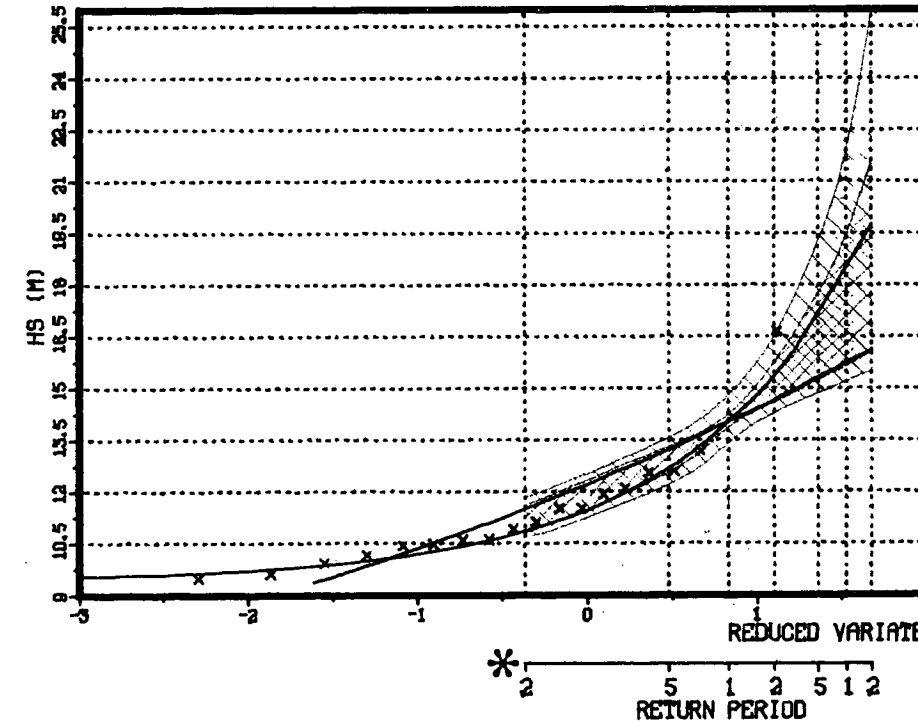

TYPE I: ——— LEAST SQUARES PA=0.0, PB=1.0
 ——— LEAST SQUARES PA=0.44, PB=0.12
 MOMENTS
 MOMENTS CORRECTED
 PEARSON III: - - - - - MAXIMUM LIKELIHOOD
 ——— MAXIMUM LIKELIHOOD
 ——— MOMENTS

TYPE II: ——— LEAST SQUARES
 ——— MOMENTS EPS=0
 MAXIMUM LIKELIHOOD
 LOG-NORMAL: ——— MAXIMUM LIKELIHOOD 2 PARMS
 ——— MAXIMUM LIKELIHOOD 3 PARMS
 MOMENTS 3 PARMS

TYPE III: ——— LEAST SQUARES PA=0.0, PB=1.0
 ——— LEAST SQUARES PA, PB = P(K)
 WEIBULL: ——— MAXIMUM LIKELIHOOD 2 PARMS
 ——— MAXIMUM LIKELIHOOD 3 PARMS

*Return period annotations refer to 2, 5, 10, 20, 50, 100 and 200 years.

Figure 3.14 Example of six extreme value distributions fitted to one set of data. The set of data is from the WES Wave Information Study.

There are many methods discussed in the literature for estimating limits of confidence in estimates of extreme values associated with small sample size. Discussion of these methods is beyond the scope of this report. However, the important point is that when the individual data points have been selected (remembering the possible error associated with each point) and one type of extreme value distribution function is assumed to fit the population then an estimate of the extreme value has a range associated with it. Typically, it may be said that in some percent (typically 90) of extrapolations the true value of the select event (e.g. 100 year return period) would lie within the range presented.

Conclusions:

1. There is no one single method for selecting data, asymptotic distribution, plotting position, or method of fitting a distribution that has been demonstrated to be appropriate to wave data representative of the study area.
2. An estimate of an extreme event in the study area should recognize the limitation of this estimate by providing a range of values in which it is considered reasonable that the estimate lies. This range should represent the following:
 - the possible error in the source data
 - the limitation of extrapolating from a small sample
 - the range of methods that may be used to select data
 - the different distributions that may be used to represent the parent population
 - the different methods of fitting the distributions to the data
 - the confidence in the estimate

It is expected that this range could be several metres and not less than $\pm 2\text{m}$ for an estimation of the 100 year event based on well verified hindcast wave data selected from a 20 year period.

3. The requirement for reliable estimates of extreme waves with return periods in the order of 100 years is essential for the design of structures required for recovery of oil and gas. For structures that are undertaking exploration or delineation drilling and that are only exposed to the ocean for relatively short periods of time the requirement may be less stringent.
4. In some parts of the study area the extreme wave heights (with selected return period) will be limited by the depth of water. An example is the area around Sable Island. In these cases the extreme value analysis need only demonstrate that use of the depth limited wave conditions is not unnecessarily conservative.

3.8 Summary by Area

a) Scotian Shelf Area

There are considerable data available for the Scotian Shelf as can be seen from figure 3.1. Most of the data however, are limited for reasons discussed in earlier sections. The WIS and SOWM hindcasts inaccurately described the meteorological conditions during storms and poorly defined the shoreline. Effects of bathymetry were not considered and the hindcasts are therefore suspect for most of the area. The METOC data can be considered to provide reasonable information on the wave climate for operational concerns in the deeper water areas. However, there are only three METOC points on the Shelf for which digital data are available. These data consequently do not have adequate spatial resolution. To obtain coverage at other points, more data would have to be extracted from the charts. Recorded wave data provide an estimate of the wave climate of some depth-limited locations close to Sable Island.

As reliable data describing severe storms do not exist published estimates of extreme wave conditions must be treated with considerable caution, particularly in areas that are clearly influenced by shallow water or the sheltering effect of Sable Island. In some parts of the Scotian Shelf extreme wave heights are limited by water depth and additional data may not be required for the estimation of extreme conditions.

Improved estimates of extreme values throughout Scotian Shelf areas are obtainable and a start in this direction is underway. A study supported by the Environmental Studies Revolving Fund is in the process of defining the 30 to 50 most severe storms that have occurred over the area. Studies have also been undertaken, Hodgins (1984), to identify procedures for treating wave propagation in shallow water areas such as exist on the Scotian Shelf. However, the final production of extreme wave conditions throughout the Scotian Shelf area will not be achieved for several years unless a major study is initiated. In the meantime conservative assumptions must be made. It appears probable that the most urgent requirement is for a reliable description of the wave, wind and current climate of the areas where extensive activities are planned. These data, which are essential for detailed operational analysis will only be achieved through the deployment of suitable instrumentation.

Special problems to be carefully considered in any study of waves on the Scotian Shelf include shallow water effects, sheltering due to Sable Island, and possibly wave-current interactions.

b) Grand Banks, North East Newfoundland Area

This area is probably the least complex from the point of view of developing wave climate knowledge. The area is the most uniform and the most open to waves in the study area. The water is relatively deep and the refraction and shoaling of waves may be less important here than in other locations.

There are once again considerable data available (Figure 3.1). However the SOWM data are of limited reliability for the reasons given in section 3.5.1. The WIS data may be reasonably adequate for wave climate information for operational concerns except possibly for the March - April period when ice

may have been a factor. The METOC data is also considered to be adequate for operational concerns and should include ice effects. It should be noted that it may be dangerous to use average wave conditions over ice infested and ice free years. During the ice infested years the conditions will be overpredicted. During an ice free year the conditions will be underpredicted. Recorded wave data provide a reasonably reliable estimate of the non-directional wave climate of the Hibernia area, based on three years of continuous measurements.

There has been more work done on the prediction of extreme events on the Grand Banks and particularly in the Hibernia area than anywhere else in the study area. The Mobil hindcast, as has been stated, is the most carefully done hindcast and provides the only data that could be considered for extreme value analyses at this time. The questions on the selection of storms in this study should be addressed, and it would be desirable to undertake additional verification of the procedure before the design values are accepted. The ESRF storm identification project will assist in answering at least part of this question.

The available hindcast models can be expected to perform well for most of the Grand Banks, North-East Newfoundland area providing the wind fields can be reliably estimated and as long as the ice edge is included. However, it has not been demonstrated at this time that the wind field can be defined to the required accuracy and over a sufficiently long period of time for the purpose of wave hindcasting.

Special problems in this area include the presence of the ice edge and possibly the effects of bathymetry on extreme wave conditions. An in-depth analysis of the effects of bathymetry and currents on the extreme wave conditions is required to quantify the possible effects and determine whether or not the analyses must form a part of future studies.

c) **Labrador Sea Area**

There is considerably less information describing the wave climate of the Labrador Sea than for the southern parts of the study area. The limitations on the hindcast data must be considered to be more severe as one proceeds north. The ice problem in the winter - spring seasons becomes more important. The definition of the shoreline continues to be a problem. In addition one can only assume that the available meteorological data for the development of wind fields for hindcasting becomes less reliable. There are fewer and fewer weather observing stations and the presence of ships reporting overwater data becomes sparse and seasonal.

For the requirements of exploratory drilling the situation is somewhat better since this is only a summer-fall activity and does not as yet require knowledge of winter wave climate.

Because of its substantial disagreements with the other datasets in the Labrador Sea and its acknowledged problem with the definition of the shoreline, the SOWM data must be discounted as a source of wave climate information there. The WIS data was not archived for Labrador Sea points north of 53°N. The Total Eastern hindcast covered only seven years and included only the storms.

The best source of wave climate data for the area is thought to be the METOC data. These data are probably adequate for operational concerns during the summer-fall seasons when reasonable numbers of ships reports are available.

The most carefully done analysis for extreme events appears to be the Total Eastern hindcast. However, it must be used with caution and conservative assumptions should be made because only seven years of storms were treated.

It would now be possible to undertake a significantly improved hindcast with considerable more data than were available in 1976. The ESRF storm identification project should be a start in this direction.

Special problems in the Labrador Sea include accurate specification of wind fields and the effects of the ice.

d) Gulf of St. Lawrence Area

Although one would expect the Gulf of St. Lawrence to be a very familiar and well known area, this is not the case in terms of accurate wave climate information. The wave climate is clearly less severe than in the other exposed southern parts of the study area. The only hindcast available was that carried out by DPW for a specific purpose in 1978.

There are a variety of measurements made by MEDS and NRC for short periods of time. Many of the measurements, however, are in sheltered locations and could not be used to define the wave climate of the Gulf.

As stated in section 3.5.6 the DPW hindcast data could be used to provide wave climate data for operational concerns in the immediate area of the four points studied. The measured time series are generally too short to provide reliable wave climate data.

There are not satisfactory estimates of extreme waves and their return periods, for the Gulf. However there are good meteorological data from which hindcasts can be accomplished.

Special problems in the Gulf include shallow water effects, currents and ice.

e) Davis Strait, Baffin Bay, Lancaster Sound

There are no measured data and no satisfactory hindcast data for these areas. The wave climate is considered to be less severe in these northern areas than in the Labrador Sea or on the Grand Banks due to the limited fetch available in most directions for wave growth and due to the presence of ice.

The problem of developing accurate wind fields for hindcasting will be more difficult than in the Labrador Sea.

There are no available statistical descriptions of the wave climate of this area and there are no estimates of extremes.

Special problems in this area include the specifications of wind fields and the presence of ice.

3.9 Findings and Conclusions

This report primarily addresses the question of whether or not the data that are available throughout the study area describing wind generated waves, are suitable for the safe design and operation of structures, associated with the offshore activities of exploratory and delineation drilling.

In section 3.9.1 conclusions are drawn concerning the requirements of the industry and the availability and adequacy of the existing data.

Conclusions concerning future requirements for wave data and for studies are presented in section 3.9.2.

3.9.1 The Requirements for Wave Data and the Availability and Adequacy of Data in the Study Area

- i) The minimum requirements of the design, certification and regulatory agencies are well defined in the available literature. Industry is, in general, satisfied that if these requirements are met, safe, efficient and effective structures can be designed and operated. The authors have found no evidence to suggest the opposite.
- ii) The development of improved design procedures proceeds through several logical steps. First the research and development agency produces an advanced understanding of some area of the design procedure. This is followed by experimentation, testing and a period of experience in the field. If the experience is successful then the improved procedure will gradually gain acceptance and find its way into recommended practices and procedures.
- iii) The research and development organizations have a requirement for more complex and more extensive wave data for their programs which are designed to advance the state of the art and refine design procedures. These requirements are not fixed but vary with the problem being addressed by the organization and with the sophistication of its research activities. At any one point in time it is only possible to predict these needs over a short period of time into the future.
- iv) There are three types of data, in general, which are required to meet the needs of the design, certification, regulatory and research organizations.

Wave Climate Data:

Wave climate data for the purposes of this study are considered to be statistical descriptions of the frequency of occurrence and persistence of individual wave parameters or joint distributions of two or more wave parameters. These statistical descriptions are obtained by either measuring the parameters on a regular schedule (e.g. once every three hours for five years) or by using techniques to predict what the value of the parameter might have been at every interval of the schedule.

Extreme Values:

Extreme values of wave parameters are the maximum value that parameter might be expected to take on in a given period of time. (e.g. the 100 year wave height). The prediction of extreme values is accomplished in several ways but in general it requires only the knowledge of say, the history of the largest wave heights in the more severe storms in an area.

Research Data:

Research data is used here to refer to all other complex data required by research organizations in their role in advancing the state of the art in the design, certification, classification and regulation of offshore drilling units and their support units.

- v) The extent of the wave data that are required by the design, regulatory and classification organizations and by the operators can be summarized as follows:
 - for operational purposes - three to five years of simultaneous measurements of wave, current and wind conditions.
 - for design purposes - a hindcast of wave conditions during all storms for which reliable meteorological data exist to adequately define the wind field. These data should cover a minimum period of twenty years (in northern areas there may not be 20 years of reliable meteorological data).
- vi) It has been found that the required data described above are not available throughout the study area. There are considerable differences between the various estimates of extreme wave conditions from the various hindcasts and studies. The differences between the wave climates from the various studies is not as dramatic.

It is concluded that adequate estimates of the wave climate for operational concerns exist only for some locations in some of the southern areas, including the Hibernia area.

There are no values of extreme wave conditions for any part of the study area which can be accepted without further analyses.

The values produced for the Hibernia area in the Mobil hindcast appear to be the best available at the moment. However these data are confidential and have not received wide public review. There are also some questions to be resolved regarding the storm selection and extreme value procedures used. It should also be noted that the Mobil hindcast data provide only estimates of extremes and not wave climate data.

The complex data required by research organizations have not or cannot be acquired because of the extreme difficulty in measuring the necessary parameters or because suitable instrumentation is not available. This is a limitation to the work of many of the research and development organizations.

- vii) There is little doubt that the technology and capability exists in Canada to pursue the development of the necessary data and information to meet the requirements of the organizations discussed above for wave data in most of the study area. There are two exceptions. The necessary meteorological and ice data for the extreme northern area is probably not available. Secondly there is a requirement to develop more advanced instrumentation before the more demanding needs of the research organizations are met.

It should be noted that much of the work is of a developmental nature and for areas where the wave regime is more complex final results may not be realized for a decade.

3.9.2 Future Requirements for Wave Data and for Studies

- viii) It is considered that wave data must be developed in the near future that will be suitable for the accurate estimation of extreme conditions in selected parts of the study area. The urgency of this requirement in the case of exploratory drilling may be somewhat less if units having unlimited class are used or if conservative assumptions are made for fixed structures. In the case of production facilities designed for the wave climate at the location where it is to be used, this requirement is of the highest priority.

It is also necessary to develop an improved knowledge of wave statistics that are representative of the study area.

- ix) It is concluded both from the studies carried out and the interviews conducted that the development of the wave data referred to in section (viii) could best be accomplished through a joint program by all organizations requiring the data. This program would have to be fully coordinated with the programs of those organizations described in section 3.10 to maximize the usefulness of the results and gain the maximum economies in realizing the goals of all concerned.
- x) It is concluded that there is a requirement to develop wave models in Canada capable of dealing with the effects of shallow water, ice and currents on waves and to verify these models experimentally in the field. (Shallow water effects are discussed in section 5.1.)
- xi) It is concluded that there is a requirement to continue to develop instrumentation with increased capability to measure the directional properties of waves and their profiles. These instruments are needed to meet the requirements of the research and development organizations, as stated in the interviews.
- xii) It is concluded that in association with the measurement program there is a requirement for continued research into the physics of wave processes to support the research organizations with the necessary basic scientific knowledge.
- xiii) It is concluded that satellite and remotely sensed data will be an important source of wave data in the future. It is important that progress in that field be monitored and that suitable actions be taken to

be ready to incorporate the data into wave programs immediately it becomes advantageous to do so. However it must be noted that sources of wave data and wave climate information for design and planning of operations will not change much in the near future. The sources will be improved hindcast models based on wind fields. Remote sensing technology and advanced instrumentation will have its early effects on operations and real time forecasting. It will be some years before the knowledge of extreme events and wave climate statistics for an area begin to benefit from the increased database. On the other hand the research and development organizations will begin to benefit immediately the data becomes available.

- xiv) It is considered that programs of field measurement of waves, currents and winds are required in areas where expansion of exploratory drilling programs are anticipated. It should be noted that wave data collected with corresponding measurements or predictions of winds and currents have considerable more value to the industry than do wave measurements alone. Existing programs of simultaneous measurements of waves, currents and winds should continue in cooperation with exploratory drilling activities. These data are invaluable to later activities.

3.10 Organizations Obtaining and Archiving Wave Data in Canada

(a) Ocean Science and Surveys

The Ocean Science and Surveys sector of the Department of Fisheries and Oceans has the major responsibility for oceanographic research in Canada. Major laboratories include the Bedford Institute of Oceanography at Dartmouth, Nova Scotia; the Institute of Ocean Sciences at Sidney, British Columbia; and the Quebec Region in Quebec City. In addition there are units in Ottawa with operational and research programs including the Marine Environmental Data Service and the Canadian Hydrographic Service.

There are four elements to the OSS wave program. Research into the physics of the phenomenon of waves and into wave climatology is carried out at the Bedford Institute. There is an instrument development program at the Institute of Ocean Sciences which is developing improved capabilities for the measurement of ocean waves. The Marine Environmental Data Services Branch has a large wave measurement program, does research into wave hindcasting and has developed a relatively complete computer file of wave data.

OSS is responsible for most of the wave research in government in Canada, for the provision of advice to the regulating agencies such as COGLA and Transport Canada and for the archival and distribution of its wave data holdings.

(b) The Atmospheric Environment Service

The Atmospheric Environment Service is the agency responsible for weather forecasting and operational wave forecasting. They also collect, distribute and archive the visual observations of wave height from ships of opportunity. The other very important role of AES in the wave climate area is the provision of accurate wind fields for wave hindcasting and the contribution of scientific knowledge of winds in the development of advanced wave models.

AES also is active in the routine production of the twice daily wave charts and forecasts which go out via facsimile broadcast from the Department of National Defence (DND) Meteorology and Oceanography (METOC) centres on the east and west coasts. The METOC centres are DND centres staffed primarily by AES meteorologists on secondment.

(c) The Department of Public Works

DPW is both a customer and a provider of wave climate information. In their work in designing and building marine facilities such as harbours, breakwaters, etc., they require various types of wave information. They have therefore developed such tools as hindcasting procedures and wind and wave data presentations and formats for internal use. These developments are useful to other clients requiring wave information. The primary source of data for DPW is the MEDS measurement programs and the AES wind data banks.

(d) National Research Council

The National Research Council has extensive facilities for studying the response of fixed and floating structures to waves, using physical and numerical models. Their scientists and engineers are particularly concerned with the accurate simulation of prototype wave conditions and, consequently, require very detailed prototype wave data. They have developed considerable expertise and experience in the analysis and presentation of wave data and, particularly, of such non-conventional wave events as wave grouping.

(e) Department of Transport

The Department of Transport (DOT) are also primarily customers for wave data and information. However in their role as a regulatory agency they find it necessary from time to time to commission specific wave studies to provide them with information necessary for the decision making process.

(f) Department of National Defence

The DND have a requirement for real time wave information which is met through their operation of the METOC centres on the east and west coasts. Data are relayed to METOC centres from the ships of opportunity observing program and from MEDS wave buoys through either the weather observers on oil rigs or satellite communications. The METOC wave charts are a source of visual wave height, period and direction information over the past decade and a half. DND also has an oceanographic program at Royal Roads which addresses wave problems from time to time.

(g) Canada Centre for Inland Waters

The Canada Centre for Inland Waters has a wave program designed around its wind-wave tank facility and measurement tower installed in Lake Ontario. The facility is quite modern and sophisticated and is excellent for researching problems in the wave generation and decay processes.

(h) Universities

There are several universities in Canada with oceanographic or civil engineering programs which have wave components. Included are the University of British Columbia (UBC), Dalhousie, Memorial and Queens Universities.

(i) Oil Industry

At the moment the oil industry has one of the largest requirements for offshore wave information in support of both exploratory drilling and development of production plans. The industry commissions a wide variety of wave studies using the services of a growing engineering consultant industry in order to obtain information for engineering design and in order to provide the government regulatory agencies with the information they need to evaluate the various aspects of operation.

(j) Engineering Consultant Industry

This industry in Canada has been substantially strengthened over the past few years because of offshore oil activities. It includes strong capabilities in environmental studies in the wave field.

(k) Government Funding Agencies

Government wave programs are funded in a variety of ways. The four primary sources of funding at the moment include regular departmental A bases, the Office of Energy Research and Development, the Department of Supply and Services (DSS) Unsolicited Proposal Fund and the Program for Industry/Laboratory Projects (PILP).

An additional funding route exists for certain classes of joint industry/government environmental studies. This is the Environmental Studies Revolving Fund (ESRF).

4.0 WAVE DATA FOR THE NORTH SEA

Production of oil and gas has been taking place in the North Sea for many years. Therefore, it is valuable to compare the wave data produced for the design and operation of North Sea structures with that available in Canadian waters and to note the identified limitations of North Sea data so that the same limitations may not exist in future Canadian data. The following discussion is primarily based on the experience of the U.K. Institute of Oceanographic Sciences (IOS).

4.1 Recorded Wave Data

Wave recorders (Waverider buoys) are installed off many platforms in the North Sea. However, this is not required by regulation, a fact which is regretted by IOS scientists. In Norwegian waters the owner is required to obtain and provide wave data to the regulatory agency. In the U.K., even when data are obtained by the owner they may not be available to other organizations.

Shipborne wave recorders have been installed on some ships stationed at important locations in the North Sea. A 3 year project was initiated to obtain data at three locations in U.K. waters using this method. The project was not entirely successful because poor data recovery was experienced.

In summary, the requirement for long term recorded data is recognized and some success has been obtained. However, the extent of data available is less than is considered necessary.

4.2 Hindcast Wave Data

The existing U.K. guidance notes which describe the 50 year return period maximum wave height throughout U.K. waters were primarily based on a parametric hindcast using extreme winds provided by the U.K. Meteorological Office (Draper 1972). More recently a spectral hindcast, named NORSWAM, was completed by U.K. Government scientists after initiation by the U.K. Petroleum Operators Association and the Department of Environment (U.K. Regulatory Agency). NORSWAM hindcast 42 severe storms occurring during the period 1966 and 1976. Data from the hindcast were archived for locations throughout the North Sea. Following analysis of the NORSWAM data it was concluded (Haring 1979) that the existing Guidance notes did not underestimate extreme wave conditions.

4.3 Visual Observations

The same visual observations are available for North Sea Waters that are available in other areas frequented by shipping. These data were not used in preparing the U.K. Guidance Notes.

4.4 Extreme Wave Conditions

Estimates of extreme wave conditions for the North Sea are contained in "Guidance for the Design and Construction of Offshore Installations" prepared by the U.K. Department of Energy, the U.K. regulatory agency, and in "Rules for the design, construction and inspection of Offshore Structures;

Appendix A - Environmental Conditions" prepared by Det norske Veritas. Similar publications have not been prepared for Canadian waters by either regulatory agencies or classification societies.

In addition, a number of technical papers discussing extreme wave statistics based on recorded data and the NORSWAM hindcast data are available, Haring (1979) for example.

4.5 Conclusion

A comparison of North Sea data with Canadian data leads to the following conclusions:

- i) More long term measured wave data have been obtained in the North Sea than in the study area in Canada.
- ii) Based on North Sea experience, efforts to obtain long term measured wave data in offshore areas of Canada are essential to the development of reliable data required for the design and operation of structures.
- iii) The major hindcast study for the North Sea (NORSWAM) was initiated by industry and undertaken by Government scientists. In Canada recent studies have been completed by individual companies. One study, supported by all organizations and designed to provide the most complete and accurate information possible for all important offshore areas has not been undertaken in Canada.
- iv) Guidance notes, which should provide the best estimate of extreme wave conditions available and which can form the subject for technical debate within the industry, regulatory agencies and classification societies, do not exist in Canada.

5.0 SPECIAL STUDY AREAS

5.1 The Shallow Water Transformation of Waves

As waves propagate shoreward from deep water, they begin to interact with the seabed and the wave height, wave length, wave direction and, in some circumstances, wave period, begins to change. These transformations are the result of several physical processes, some of which act in combination and some of which may act independently. The net result is that the physical characteristics of the wave climate will be substantially different in shallow water than observed or estimated in deep water. Wave heights may be higher, or lower, than the offshore wave heights and wave breaking may occur because of the limited water depth.

In general terms, the bottom topography begins to significantly influence the propagation of waves in water depths that are in the order of one-third of the wave length or less. The shallower the water and the more irregular the ocean bottom, the greater will be the resulting changes to the waves. During severe storms wave periods may reach 15 secs and these waves will begin to be influenced by water depths of 100m.


Figure 5.1 shows the parts of the study area where the water depth is 100m or less. A study of extreme wave conditions in these areas should consider the possible influence of the bottom topography on the magnitude of the predicted events. In general, the bottom is relatively flat and dramatic changes to the wave characteristics do not appear to be likely for most areas. However, there are exceptions where the bottom topography is irregular and relatively steep slopes exist.

Figure 5.2 shows the parts of the study area where the water depth is 50m or less. In these areas attention should be given to the effects of the bottom topography when developing wave climate statistics. The influence on extreme wave conditions can be expected to be particularly significant in these areas.

Procedures for the calculation of shallow water transformation of wave data can be divided into two types:


- a) procedures for the representation of a random or irregular sea-state by long crested monochromatic waves with a single frequency or period and uniform height or
- b) procedures for the representation of a random sea-state using spectral methods. These spectral representations may include directional and non-directional wave spectral formulations.

A general outline of these procedures is presented in Figure 5.3. The correctness of either approach is still a matter of debate in the coastal and ocean engineering community. Procedures for a long crested monochromatic wave with a single frequency are in wide-spread use and procedures for various spectral formulations also exist. However, the majority of on-going research in the area of shallow water transformation is directed to the development of generalized formulations for spectral methods to be used by the engineering community.

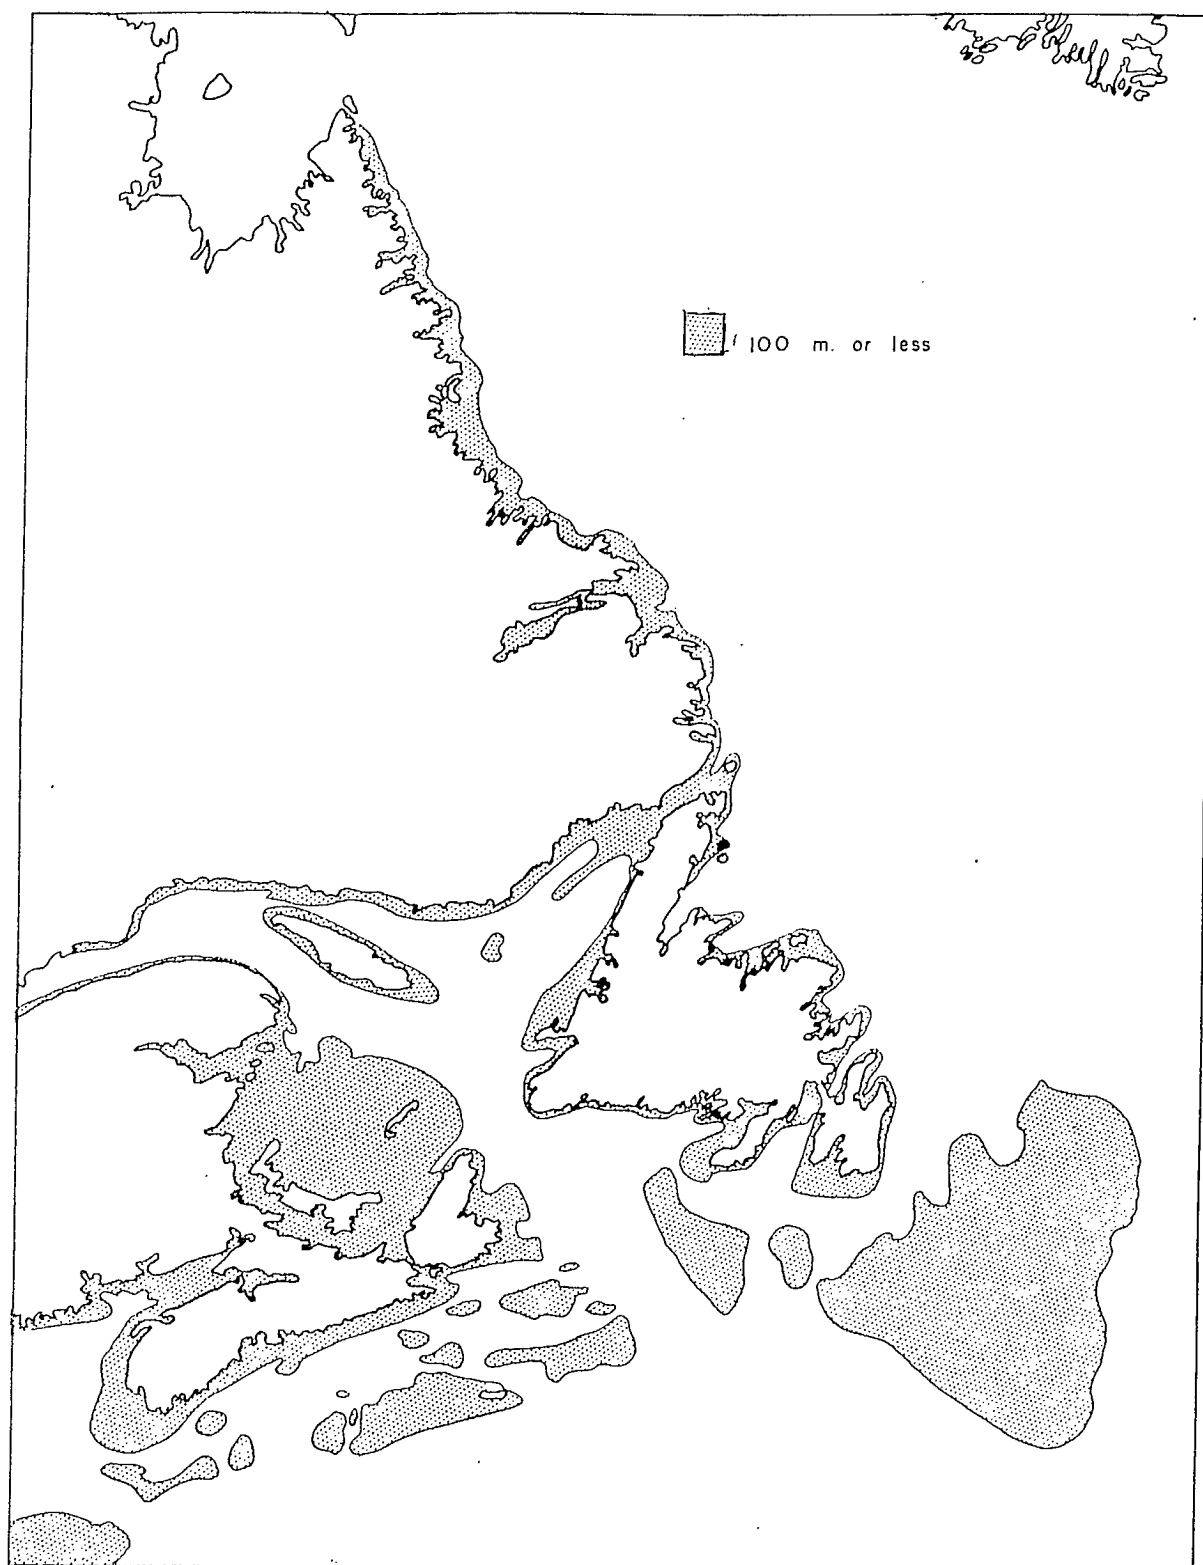

AREAS WHERE DEPTH OF WATER
IS LESS THAN 100 m.

Figure 5.1 Portions of the study area where the water depth is 100 m or less.

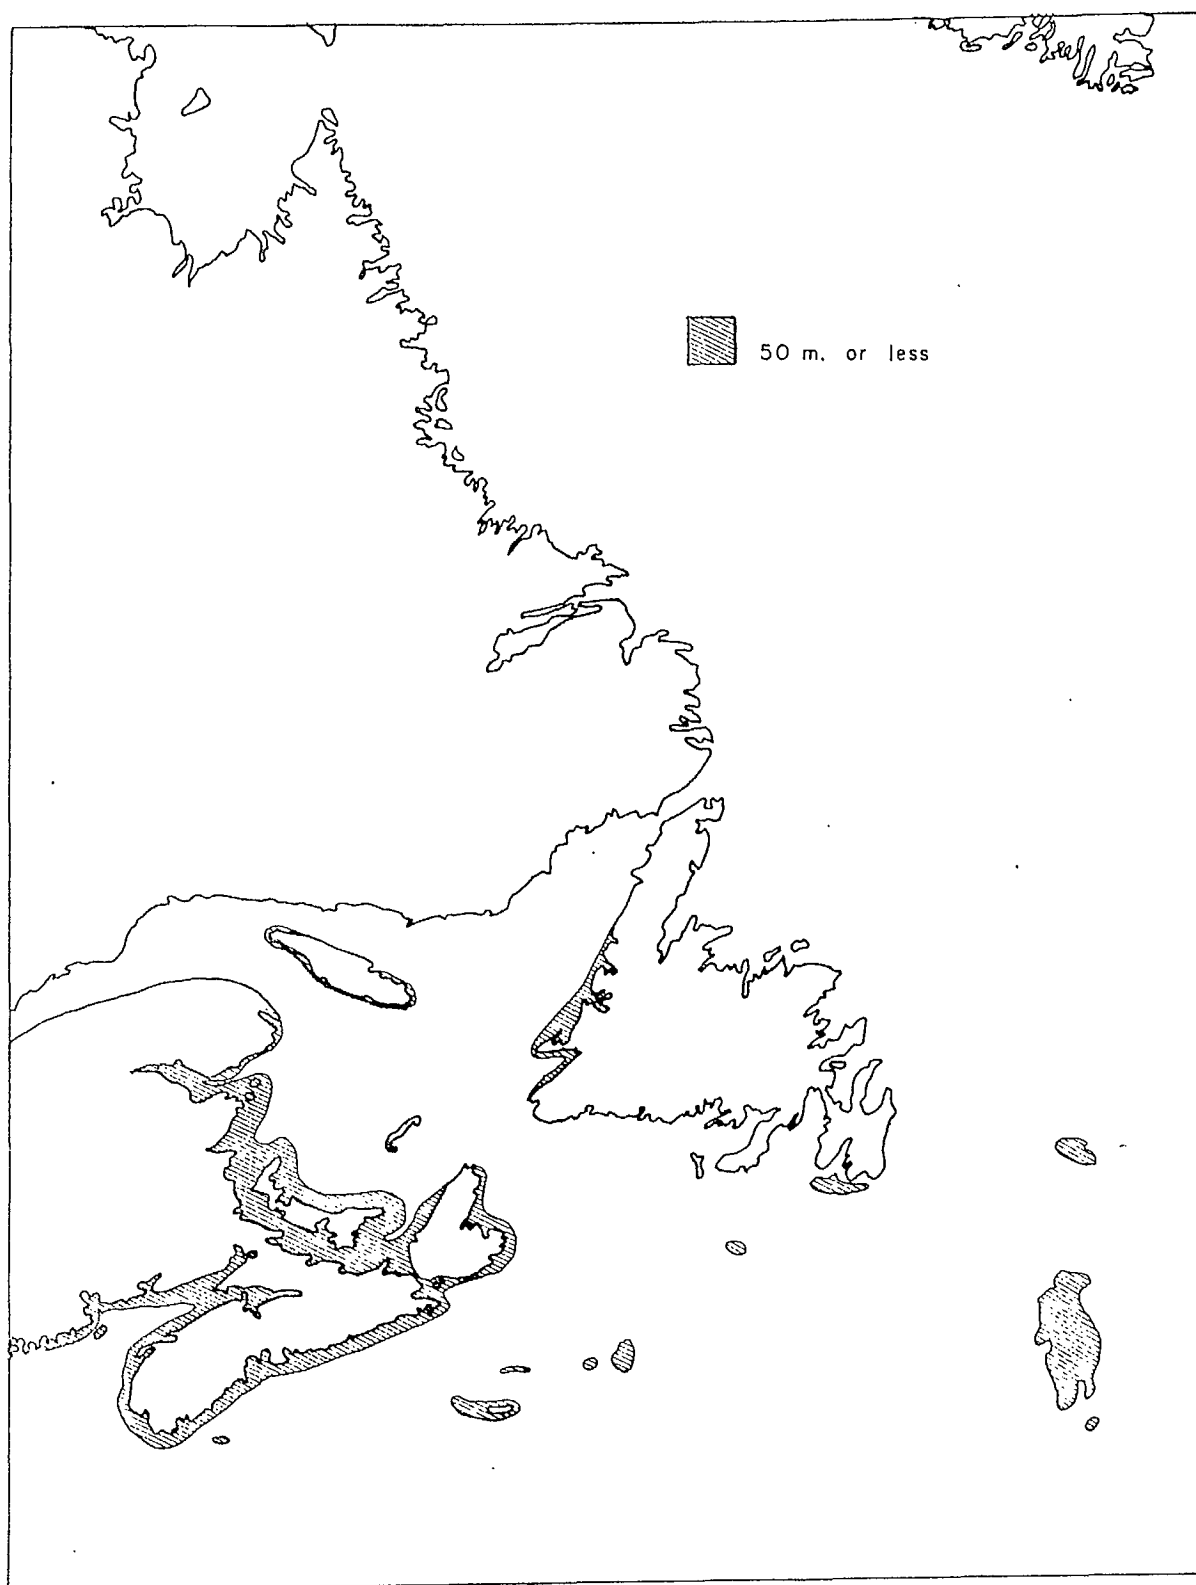

AREAS WHERE DEPTH OF WATER
IS LESS THAN 50 m.

Figure 5.2 Portions of the study area where the water depth is 50 m or less.

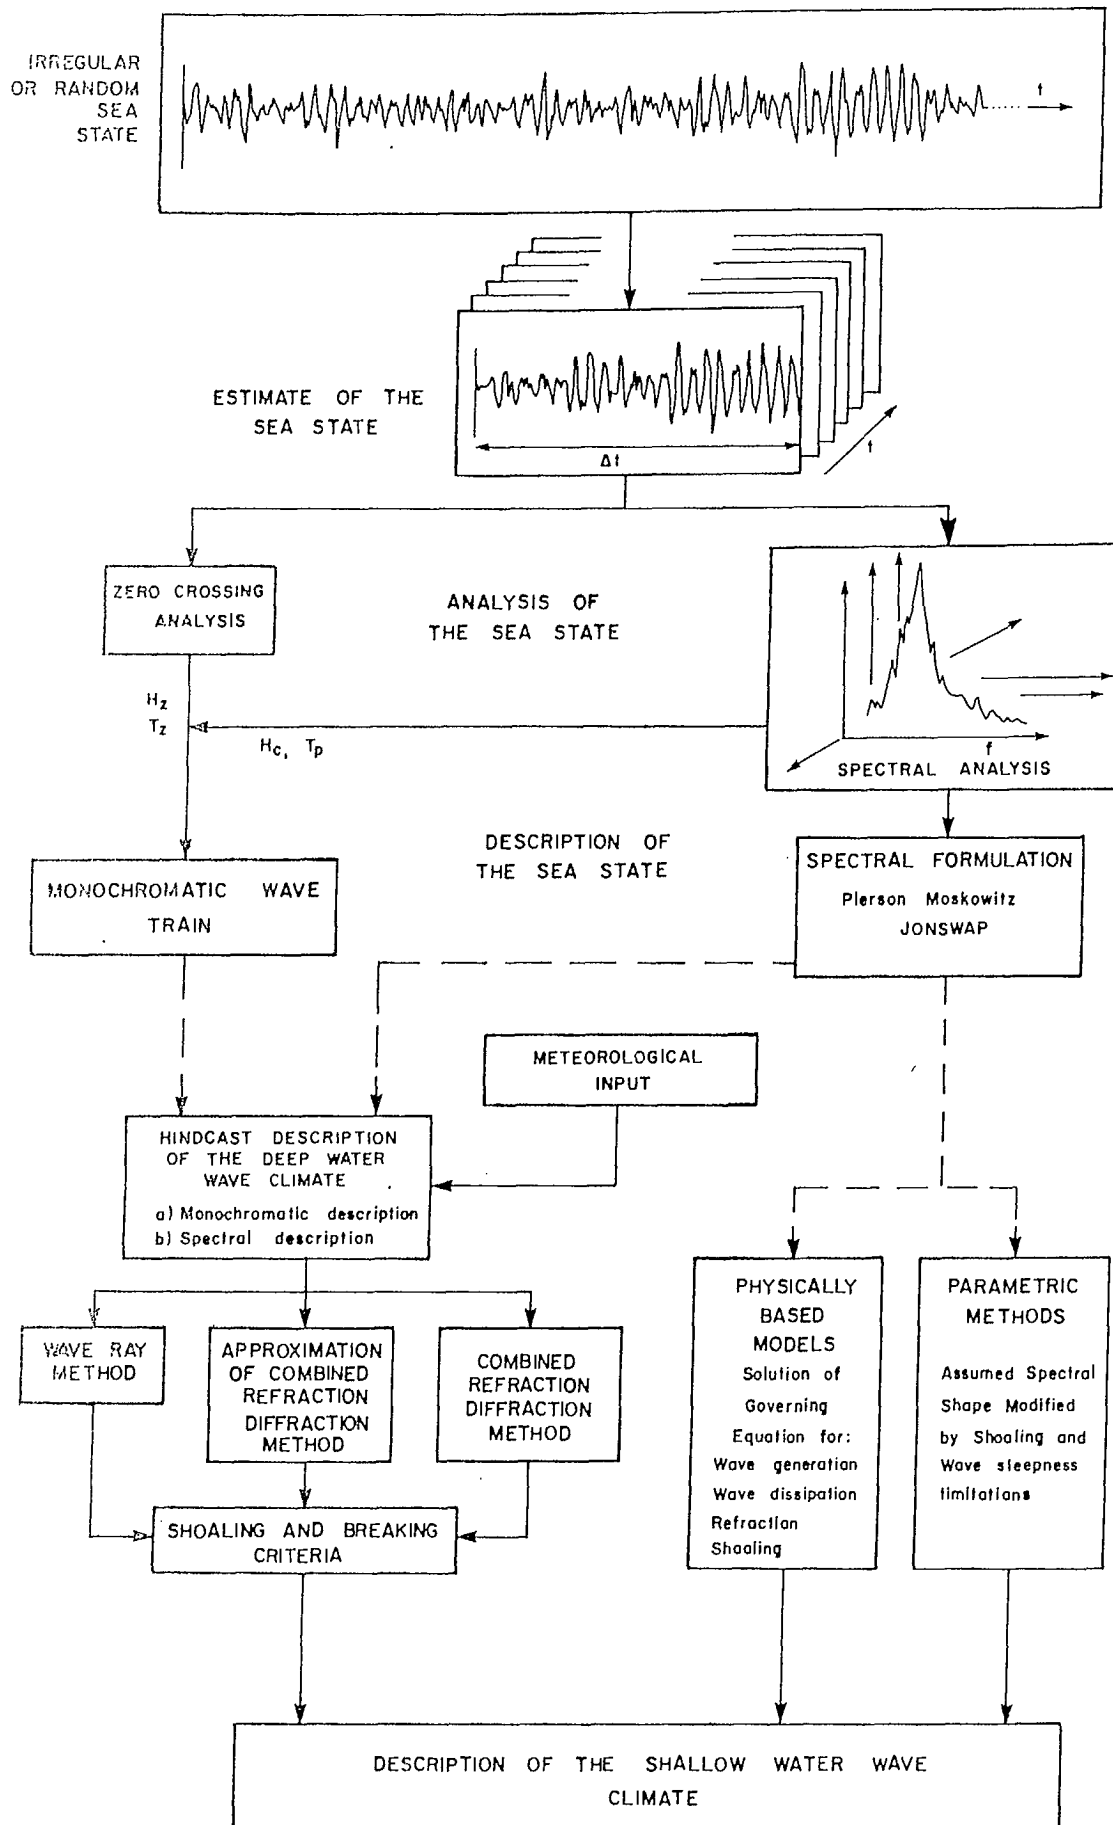


Figure 5.3 Procedures to evaluate the effects of bottom topography |

Procedures for long crested monochromatic waves with a single frequency can include the effects of wave refraction, wave shoaling, wave energy dissipation due to bottom friction and breaking in shallow water. No account is made for additional wave energy generation by the wind as waves propagate shorewards or for energy dissipation mechanisms such as bottom percolation or breaking induced by wave steepness instability, or for non-linear wave-wave interactions.

In general most of these procedures are either unverified or only verified in certain special or idealized applications.

Procedures for spectral formulations can be divided into two types:

- a) those based on parametric models
- b) those based on physically realistic formulations.

Parametric methods are based on the concept of representing the random sea-state with an assumed spectral shape defined by a limited number of parameters. Parametric models have been developed which implicitly incorporate non-linear wave interactions by the assumed shape of the spectra, but they do not incorporate transformations caused by interaction of the sea bed and the waves.

Physically based spectral formulations include terms which describe the wave generation mechanisms, such as the Philips' resonant mechanism and the Miles' stability mechanism, wave energy dissipation terms for bottom friction and wave breaking and terms to describe refraction and shoaling. The non-linear wave interactions are not included in these formulations primarily because of the extensive complications which would result in the computational solution.

Physically based spectral formulations also exist for both stationary and non-stationary meteorological conditions. Non-stationary conditions include combinations of sea and swell arriving at a shallow water location where either the offshore meteorological conditions producing swell are changing or the local meteorological conditions producing local seas are changing. Changes in the meteorological conditions can include variations in the wind strength or direction. Stationary conditions assume that no changes are taking place.

In general, parametric based models for shallow water can only describe local stationary conditions although non-stationary models in deep water have been developed and used in other areas.

It should be noted that existing physically based methods do not include non-linear wave interactions primarily for two reasons:

- a) well tested models for shallow water do not presently exist or are in the research state. Models do exist for deep water conditions.
- b) Including non-linear terms in existing computational schemes will result in costly and complicated procedures.

It is generally agreed among researchers that the non-linear wave interaction terms may be the most important parameter in the shallow water transformation. However, there is not total agreement and some researchers feel that the apparent importance of non-linear terms may be the by-product of existing simplistic linear models for refraction, shoaling and the lack of consideration of the effects of short crestedness and directional characteristics of the random sea-state.

In all cases, existing procedures for the shallow water transformation of wave data are either unverified, or have been verified with limited data or in special circumstances. Caution should be exercised in the application of any particular method which has not been verified against data obtained in the area of interest.

During the course of this investigation the following conclusions were drawn regarding the influence of bottom topography on wave conditions in the study area.

1. An in-depth analysis of wave transformation due to water depth was not identified for any location within the study area, following review of the available technical literature.
2. None of the wave hindcast studies summarized in this report consider the effects of bottom topography in possibly increasing or decreasing the predicted wave heights.
3. It has been postulated but not proven, that water depth may have a significant effect on the wave climate, in particular extreme wave conditions, in some of the more active parts of the study area such as Hibernia or Venture. In some areas, the wave height may be enhanced as a result of refraction. In other areas, the maximum wave height will certainly be limited by the depth to something of the order of 0.8 times the depth.
4. Existing methods of simulating wave transformation are limited by a general lack of prototype verification. Application of these methods to the study area may be particularly difficult (and very expensive to complete) because of the very large area that may influence the wave climate at a selected location and because of the probable need to consider simultaneous wave transformation and wave generation.

5.2 Non-Conventional Wave Events

A number of possible wave characteristics have been identified as having the potential to produce motion or stress responses in a structure that are significantly different from those estimated to occur using analysis procedures with standard wave characteristics. These characteristics, referred to in this report as non-conventional wave events, include non-symmetric wave geometry, breaking waves in deep water, wave grouping and 'freak' waves.

This concern with non-conventional events is being demonstrated by hydraulic laboratories that have recently developed improved capabilities in simulating realistic sea-states.

It will take time before these concerns can be represented in design procedures because the available recordings of measured waves do not provide sufficient information to document these characteristics or to allow the frequency of occurrence of these characteristics to be defined.

It should be noted that while the industry is closely monitoring the progress being made in hydraulic laboratories and by scientists concerned with wave measurement, there is not a concern that existing design procedures are unsafe. There is no published prototype evidence supported by measurement, to suggest that any structure associated with the oil industry has been damaged as a direct result of one of these non-conventional wave events.

Wave characteristics that are being studied at present are as follows:

5.2.1 Wave Asymmetry

There is evidence from wave recordings that the average slope on the leading side of a wave is steeper than the following side. The steepness on the leading side may be greater than assumed in design procedures and has the potential of producing larger loadings when the wave interacts with a structure.

5.2.2 Wave Breaking

Breaking of waves in deep water have been characterized, Mason (1952), as 'plunging', a situation where the wave crest curls forward over the front slope of the wave and 'spilling' where the wave crest spills down the front slope. Leblond (1982) notes that breaking is a manifestation of strong non-linearities of the free surface boundary conditions and that is one of the least understood aspects of water waves.

Wave breaking is known to result in a condition where waves move into an opposing current as well as when the non-linear interaction of several waves in a train occurs.

Field investigation of breaking waves is the subject of a possible research program to be undertaken in the North Sea by U.K. scientists.

5.2.3 Wave Grouping

It can be observed in many wave records that the larger waves are grouped together rather than being randomly dispersed within the wave record. It has been demonstrated that some structures respond differently to the two wave trains (one with the larger waves grouped together) even though the average or significant wave height for the two records may be the same. The effect is due to two phenomena. A group set-down under a wave group and an associated set-up between groups leads to the formation of long waves which can excite structural response. This is important in shallower water. The successive occurrences of several large waves in a group in conjunction with the non linear response of structures to waves leads to excitation frequencies which are related to the group repetition frequency rather than the wave frequencies. This is important for large structures.

Wave grouping is presently being extensively reviewed by many researchers. It is, for example, proposed by some researchers that wave grouping occurs in any wave record providing the record is long enough and that the frequency of occurrence of wave groups is predicted by existing statistical theory. Other investigators believe the observed grouping is more frequent than can be explained by existing theory.

However, the fact that wave groups do occur requires that their effect on the stability, motions and integrity of structures be investigated.

5.2.4 Freak Waves

The words 'freak', 'rogue', 'episodic', 'abnormal', are used to describe very large waves that have been encountered in the oceans. There exist many reports of ships encountering and being damaged by such waves. These reports are occasionally supported by photographs.

There is at present no accepted theoretical basis to describe these waves or their frequency of occurrence in the ocean.

Existing statistics predict the presence of large waves that may have a height in the order of two times the significant wave height. The large waves occur as individual wave crests are superimposed when different wave trains interact.

In the presence of a horizontal current gradient, refraction of waves may occur resulting in a concentration of wave energy. And an opposing current will cause waves to become steeper. Many of the ship reports of 'freak' waves have occurred in areas where strong ocean currents exist. An analysis of wave interaction with currents that may occur in the study area and the possible consequence of increased wave heights has not been published.

5.2.5 Three-Dimensional Sea-States

Prototype sea-states have three-dimensional characteristics. Waves do travel in different directions and, except for swell waves do not have a constant height along the crest. This is easily observed and it is clear that structures will respond differently to the real sea-state compared to a

situation where all the waves are assumed to travel in one direction and the height does not vary along the wave crest.

However, the fact is that there are very few measurements of directional seas. Instruments exist that are theoretically capable of measuring the directional characteristics of prototype sea-states. However, these instruments are only recently available and have not yet provided a substantial body of data.

5.2.7 Conclusion

The most serious limitation to research into non-conventional wave events, as described above, is the lack of suitable prototype measurement of waves.

In the authors' opinion one of the more important items of research to support the development of future design procedures is prototype measurement of waves.

This measurement program should have the following emphasis.

1. Point measurement of surface profile from a fixed location.
2. As complete a description as possible of directional wave characteristics.
3. Continuous recordings during storm events.
4. Mapping of the sea surface at an instant of time (as might be obtained from stereo photography).

5.3 Future Sources of Wave Data

There are only three sources of future wave data which show promise for the collection of additional wave data useful in the development of wave climate information off the east coast of Canada. The first area is the development of advanced instrumentation. The second is the development of aircraft and satellite remote sensing capabilities. The third is the development of land based radar sensing of waves and currents. These potential sources are described below.

5.3.1 Advanced Instrumentation

There are two types of in situ instrumentation which have either recently reached the market or are under development which are of great interest. The first is the surface based heave and tilt buoys produced by Datawell of the Netherlands and Endeco of the U.S.A. The Datawell buoy is the model referred to as the WAVEC. The Edico is the model 956 Wave-Track buoy.

These buoys are designed to measure wave direction as well as wave height spectra. If they can be shown to meet the manufacturers claims they will permit the collection of directional data on a routine basis. These data

will be extremely useful in verifying hindcast models and will thus permit the use of the directional outputs of these models with increased confidence. In addition the more complex directional data required by the research organization will begin to become available.

The second instrument is under development at the Institute of Ocean Sciences, Department of Fisheries and Oceans, Patricia Bay. It consists of an acoustic package which sits on the ocean bottom and senses the sea surface shape using high frequency sound waves. Theoretical calculations indicate that the device should be able to measure directional wave spectra. It is also unique in that it will measure wave lengths and slopes directly rather than depending on theoretical considerations to convert time series to wave shapes.

5.3.2 Applications of Airborne or Satellite Remote Sensing to Wave Data Collection

Introduction

The remote sensing of ocean waves from satellite systems offers many advantages. Since all of the present techniques make use of active microwave sensors, they return data equally well during day or night and in all kinds of weather. They can provide wave information from all ocean areas surrounding Canada depending on the choice of orbit. Each of the instruments available have characteristic ground coverage ranging from kilometres to hundreds of kilometres in width for a single orbit. The satellites carrying these sensors operate in low orbit and therefore have large ground speeds which means very quick sampling of large areas along the ground track. Because of the volumes of data that may be acquired relatively quickly, it would be possible to sample wave conditions over a large area in a short time compared to the conventional point measurements currently used. The data so acquired must be incorporated routinely into the present system of analysis before it will be of use to offshore operators.

Instruments

There are three instruments used aboard satellites which can provide wave data. The first is an altimeter. Such an instrument can provide information on significant wave height and large scale currents. It also may have the potential for yielding directional wave spectra, dominant wave direction and information on swell waves.

The second instrument is a scatterometer. This device is used to sample the surface wind field to provide observations of speed and direction. It was used successfully on SEASAT to provide large scale coverage of winds. In order to arrive at wave information the wind data would have to be used in conjunction with some kind of wave forecasting or hindcasting model.

The last instrument is a synthetic aperture radar (SAR). This can be used for making direct observations of the ocean waves. Processing of the high data volumes can yield directional wave spectra and information on small scale surface currents.

All of the above instruments require a substantial amount of computer processing before the wave information can be extracted. It appears that the altimeter requires the least since it will give a direct measure of average wave properties. The scatterometer data requires less work to extract the wind information than the SAR but the wind data must be used with a wave model so that it would seem that approximately the same effort is required for both instruments.

Historical Data

Two satellites have carried the instruments described above. The GEOS-3 satellite had on board an altimeter which was improved upon by the altimeter on board SEASAT. The first use of a SAR and scatterometer were made with SEASAT. The SEASAT altimeter looked straight down with a swath (the swath is the width of the ocean surface illuminated by the radar and from which data are returned) of 2.4 to 12 km depending on sea-state. (Born et al., 1979). It was designed to return surface height measurements accurate to 10 cm for sea-states less than 20 m. The estimated significant wave height was projected to be accurate to plus or minus 0.5 m or 10%, whichever was greater.

The scatterometer had a swath width of 500 km on each side of the ground track of the satellite. The projected spacial resolution was 50 km by 50 km. Surface winds were to be precise to plus or minus 2 m/sec and 20 degrees for winds speeds between 4 to 26 m/sec.

The SAR had a swath width of 100 km with a spacial resolution of 25 m. The radar looked off to the side and at 20 degrees from nadir. Because of high power consumption by this instrument it was only operated sporadically. Much of the data returned from the SAR have yet to be analysed 6 years after SEASAT failed.

Potentials for Use

A summary of the capabilities of all of the these instruments is provided by Huang (1979) and Brown and Cheney (1983). The significant wave height measured with an altimeter has been demonstrated to be comparable to surface wave observations with a standard deviation of 30 cm for wave heights below 5 m, and wind speeds below 10 m/sec. These type of measurements have been shown to be superior in reliability compared to standard ship reporting. Research is preceeding to enable routine analysis to extract directional wave information, and dominant wavelengths. Altimeters are low power, low data rate instruments for which fairly standard techniques exist for analysis. They are relatively easy to build and operate on a satellite. They return only limited wave information over a relatively small swath so that long operation times will be required before the necessary statistics may be acquired to develop reliable estimates of extreme wave conditions. Because of the small swath, the use in operational wave forecasting will be primarily as a calibration tool for wave models. In this respect, the data returned from an altimeter will be only an enhanced version of spot measurements such as returned from a Waverider buoy.

A scatterometer is also a low data rate instrument with low power requirements. The areal coverage is large so that world ocean coverage is possible every day. The spacial coverage is relatively coarse but permits the resolution of the major meteorological wind fields. The data returned can have some directional ambiguity but this can be resolved with suitable data processing. Comparisons of SEASAT derived winds to surface measurements show an rms difference of about 1 m/sec for large and medium scales.

The data returned from a scatterometer can yield estimates of wave properties through the application of a wave hindcasting model which can make use of the large scale wind analyses. The reduction of the scatterometer data to wind velocities and grid scales appropriate to such models is not automatic but appears to be easily done. The reliability of the wave results are then a function of the model and how important the smaller scale wind variations, not well resolved by the scatterometer, are to the generation of waves.

The SAR is a high data rate, high power instrument. A typical swath width is 100 km with 25 m resolution. Preliminary estimates of the ability to image waves gives direction estimates to plus or minus 25 degrees and wavelengths to plus or minus 15%. Further work on SEASAT data is continuing and reducing these estimates. A SAR is not yet capable of returning wave height information although various authors have done comparisons between SAR and wave buoy spectra. A SAR is seen as the only way large scale observations of waves may be done. With dedicated processing facilities, wave information can be extracted in time for operational use of the data either directly or as calibration points of a wave hindcast.

Satellite Programs

There are a number of satellites being planned to carry these instruments and all scheduled for launch about the end of the 1980s or early 1990s. Canada's RADARSAT will have on board a SAR plus other instruments to be decided upon (a scatterometer is under consideration). Part of the prelaunch work is the evaluation of the SAR as a sensor for deriving wave parameters. The United States is considering two satellites of note. One, called NROSS (Navy Remote Sensing Ocean Satellite System) will carry a scatterometer. It is due for launch around 1988. The second is part of the TOPEX experiment designed to measure the sea surface slope and thereby ocean currents. It is designated to carry an altimeter with finer operating constraints than the one aboard SEASAT. It is due to be launched sometime in the early 1990s subject to budgetary considerations. The European Space Agency is designing a satellite (ERS-1) to carry both a SAR and scatterometer. Canada is participating in the planning of this system and therefore will have direct access to the data returned from the instruments. This is due for launch about 1988. The Japanese are also planning a satellite borne SAR again to be launched in the 1990s. Finally, the French are planning the launch of an altimeter sometime in this time period as well. It is clear that by the early 1990s these sources of wave data will begin to be available from many different sources. By this time some of the potential, but as yet undemonstrated, uses of these instruments may have become routine.

5.3.3 Land Based Radars

The third area of development is the land based radars. Two versions exist which claim to image the sea surface and return wave data. The first version is the CODAR which is a relatively small instrument located close to the beach. It images about 60 km out to sea and is reported capable of measuring wave heights and directions as well as surface currents. The second radar is an over the horizon type one which depends on reflection from the ionosphere to image the ocean surface. An experiment has been carried out with a high power radar in Rome, New York supplying the beam and a receiver in Ottawa receiving the returned signal. A significant portion of the Labrador Sea was imaged.

Both these radars are in the development stage. It is not clear at this time if and when accurate data which can supplement wave climate data in Canada will be available.

REFERENCES

1. American Bureau of Shipping (ABS), 1980. Rules for the Building and Classing of Mobil Offshore Drilling Units.
2. American Bureau of Shipping (ABS), 1983. Rules for the Building and Classing of Offshore Installations, Part I Structures.
3. American Petroleum Institute (API), 1982. Recommended Practice for Planning, Designing and Constructing Fixed Offshore Platforms. API Report RP2A, Thirteenth Edition, January 1982.
4. Andrews, K., N.M. Dacunha and N. Hogben, 1983. Wave Climate Synthesis, National Maritime Institute, NMIR149, January, 1983.
5. Ashe, G.W.T. and J. Ploeg, 1971. Wave Climate Study Great Lakes and Gulf of St. Lawrence, Volume II: National Research Council of Canada, Division of Mechanical Engineering Report MH107A.
6. Baird, W.F., 1978. Wave Climate Analysis for Selected Locations in the Gulf of St. Lawrence and Lake Superior: Marine Directorate Report, Public Works Canada, August 1978.
7. Baird, W.F. and J.S. Readshaw, 1981. A Comparison of Hindcast and Recorded Wave Data. Marine Environmental Data Service, Department of Fisheries and oceans, Contractor Report No. 1, May 1981.
8. Bales, S.L., W.E. Cummins and E.N. Comstock, 1980. Potential Impact of Twenty Year Hindcast Wind and Wave Climatology on Ship Design, S.N.A.M.E., Chesapeake Section Meeting, September 17, 1980.
9. Born, G.H., J.A. Dunne and D.B. Lame, 1979. SEASAT mission overview. Science, Vol. 204, No. 4400, 29 June 1979, pp. 1405-1407.
10. Brown, O.B. and R.E. Cheney, 1983. Advances in satellite oceanography, in U.S. National Report of the 18th General Assembly, International Union of Geodesy and Geophysics, Hamburg, 15-27 August 1983, pp. 1216-1230.
11. Cardone, V. and D.B. Ross, 1977. State-of-the-Art Wave Prediction Methods and Data Requirements. Proceedings of the Ocean Wave Climate Symposium, pp. 39-60.
12. Cardone, V.J., W.J. Pierson and E.G. Ward, 1976. Hindcasting the directional spectrum of hurricane generated waves. J. of Petrol. Technology, 28 April, pp. 385-394.
13. Chen, H.T. and D. Hoffman, 1979. The Implementation of the 20-year Hindcast Wave Data in the Design and Operation of Marine Structures. Offshore Technology Conference, Vol. 4, p. 2495.
14. Corson, W.D., D.T. Resio, R.M. Brooks, B. Ebersole and R.E. Jensen, 1981. Atlantic Coast Hindcast, Deepwater Significant Wave Information, U.S. Army Waterways Experiment Station, 891 pages, January 1981.

15. Corson, W.D. and D.T. Resio, 1981. Comparison of Hindcast and Measured Deepwater Significant Wave Heights, U.S. Army Corps Waterways Experiment Station, Wave Information Studies of U.S. Coastlines, WIS Report 3, 41 pages, 1981.
16. Cummins, W.E. and S.L. Bales, 1980. Extreme Value and Rare Occurrence Wave Statistics for Northern Hemispheric Shipping Lanes. Proceedings - 5th Ship Technology and Research Symposium, pp. 219-239, June 1980.
17. Det norske Veritas (DnV), 1977. Rules for the Design Construction and Inspection of Offshore Structures (Reprint with corrections 1981).
18. Det norske Veritas (DnV), 1977. Rules for the Design Construction and Inspection of Offshore Structures. Appendix A - Environmental Conditions (Reprint with corrections 1981).
19. Det norske Veritas (DnV), 1977. Rules for the Design Construction and Inspection of Offshore Structures. Appendix B - Loads (Reprint with corrections 1982).
20. Det norske Veritas (DnV), 1982. Rules for the Classification of Mobil Offshore Units. Part 3, Chapter 1, Structural Design General, September 1982.
21. Draper, L., 1972. Extreme Wave Conditions in British and Adjacent Waters. Proceedings of 13 Coastal Engineering Conference, July 1972.
22. Group Five Consulting Ltd., 1978. Extreme Wave Conditions in the Labrador Sea, A Hindcast Analysis Using Synoptic Weather Maps. Report submitted to Total Eastcan Exploration Ltd., February 1978.
23. Hammett, D.S., 1983. Future semi-submersible drilling units. RINA Offshore Engineering Group Int. Symposium: Semi-submersibles the New Generation, March 1983.
24. Haring, R.E., 1979. Extreme Wave Statistics Based on NORSWAM Hindcast Results. International Conference on Sea Climatology, Paris, October 1979.
25. Hodgins, D., 1984. Shallow Water Wave Calculations. Canadian Contractor Report of Hydrography and Ocean Sciences, No. 10.
26. Hoffman, D and H.H. Chen, 1978. The Use of Directional Hindcast Spectra as Design Wave Spectra. Offshore Technology Conference, Vol. 4, pp. 1989-2001, 1978.
27. Hogben, N. and Lumb, 1967. Ocean Wave Statistics. Her Majesty's Stationary Office, London, 1967.
28. Huang, N.E., 1979. New developments in satellite oceanography and current measurements, in U.S. National Report of the 17th General Assembly of the International Union of Geodesy and Geophysics, Canberra, 2-15 December, 1979, pp. 1558-1568.
29. Jardine, T.P., 1979. The Reliability of Visually Observed Wave Heights. Coastal Engineering, Vol. 3, pp. 33-38.

30. Lachapelle, A., 1981. Winds and Waves in Lancaster Sound. Proc. of 6th Int. Conf. on Port and Ocean Engineering under Arctic Conditions.
31. Lachapelle, A. and J.D. Maxwell, 1983. Winds and Waves in Lancaster Sound and Northwestern Baffin Bay. Canadian Climate Center Rep. No. 83-7. AES, Downsview.
32. Lazanoff, S.M. and M.M. Stevenson, 1977. A Twenty Year Northern Hemisphere Wave Spectral Climatology. Proceedings of the NATO Symposium on Turbulent Fluxes Through the Sea Surface, Wave Dynamics and Prediction, France, September 1977.
33. LeBlond, P.H. 1982. A Preliminary Review of Nonspectral Wave Properties: Grouping, Wave Breaking, and Freak Waves. Report prepared for Marine Environmental Data Service, Department of Fisheries and Oceans, March 1982.
34. Mason, M.A., 1952. Some Observations of Breaking Waves in Gravity Waves. U.S. Nat. Bur. Standards, Circular No. 521, pp. 215-220.
35. Neu, H.J.A., 1982. 11 Year Deep-Water Wave Climate of Canadian Atlantic Waters. Can. Tech. Rep. Hydrog. Ocean Sci. 13: vii + 41 p.
36. Nordenstrom, N., 1975. A Method to Predict Long Term Distributions of Waves and Wave Induced Motion and Loads on Ships and Other Floating Structures. Norske Veritas Report No. 81, April 1975.
37. Oceanweather Inc., 1982. Hibernia Wave Hindcast Study. Final Report (Confidential). Submitted to Mobil Oil Canada, March 1982.
38. Ochi, M.K., 1978. Wave Statistics for the Design of Ships and Ocean Structures. Proc. SNAME. Paper presented in New York, November 1978.
39. Permanent International Association of Navigation Congresses (PIANC), 1973. Report of the International Commission for the Study of Waves. Excerpt from Bulletin No. 15, Vol. II, 1973.
40. Pierson, W.J. and R.E. Salfi, 1978. Verification Results for Spectral Ocean Wave Model (SOWM) by Means of Significant Wave Height Measurements Made by the GEOS-3 Spacecraft. NASA Report NASA-CR-62089, p. 236.
41. Pierson, W.J., 1982. The Spectral Ocean Wave Model (SOWM). A Northern Hemisphere Computer Model for Specifying and Forecasting Ocean Wave Spectra. David Taylor Naval Ship Research and Development Center, Report DTNSRDC-82/001.
42. Resio, D.T., 1982. Assessment of Wave Hindcast Methodologies in the Scotian Shelf, Grand Banks and Labrador Sea Areas. Can. Contract. Rep. Hydrog. Ocean Sci. 4: 128 p.
43. Wilson, J.R., 1983. Hindcasting Waves from Winds for the East Coast of Canada. Proceedings Oceans 83, San Francisco, August 1983.

APPENDIX A

DESIGN PROCEDURES

AND

REQUIREMENTS FOR WAVE DATA

APPENDIX A

INDEX

	<u>Page</u>
A.1 Stability in Extreme Conditions	A-1
A.1.1 Fixed Structures	A-1
Design	A-1
(i) American Petroleum Institute	A-1
Classification	A-6
(i) American Bureau of Shipping	A-6
(ii) Det Norske Veritas	A-11
A.1.2 Floating Structures	A-20
Design	A-20
Classification	A-20
(i) American Bureau of Shipping	A-20
(ii) Det Norske Veritas	A-22
A.2 Fatigue Calculations	A-27
A-3 Design and Assessment of Operations	A-28
A-4 Requirements of Regulatory Agencies	A-30

Appendix A

Design & Analysis Procedures Involving Wave Data

In this Appendix published requirements of the industry for wave data in the design, classification and regulatory processes are quoted from referenced documents. While all published documents could not be reviewed during the course of this study, the following provides a representative perspective of current design practice and the requirement for wave data.

A.1. Stability in Extreme Conditions

A.1.1 Fixed Structures

Design:

(i) American Petroleum Institute

API (1982) states the following concerning requirements for wave data:

Available statistical data and or realistic statistical and mathematical models should be utilized to develop the description of operating and extreme environmental conditions.

1. *Operating environmental conditions (conditions which are expected to occur frequently during the life of the structure) are important both during the construction and the service life of a platform. (operating environmental conditions are discussed in this Appendix in section A-3).*
2. *Extreme conditions (conditions which recur quite rarely during the life of the structure) are important in formulating platform design loadings.*

All data used should be carefully documented. The estimated reliability and the source of all data should be noted and the methods employed in developing available data into the desired environmental values should be defined.

Wind-driven waves are a major source of environmental forces on offshore platforms. Such waves are irregular in shape, can vary from one or more directions simultaneously. For these reasons the intensity and distribution of the forces applied by waves are difficult to determine. Because of the complex nature and the technical factors which must be considered in developing wave-dependent criteria for the design of platforms, experienced specialists knowledgeable in the fields of meteorology, oceanography, and hydrodynamics should be consulted.

In those areas where prior knowledge of oceanographic conditions is insufficient, the development of wave dependent design parameters should include at least the following steps:

1. *Development of all necessary meteorological data.*

2. *Theoretical projection of surface wind fields.*
3. *Theoretical prediction of deepwater general sea-states along storm tracks.*
4. *Definition of maximum possible sea-states consistent with geographical limitations.*
5. *Delineation of bathymetric effects on deepwater sea-states.*
6. *Introduction of probabilistic techniques to predict sea-state occurrences at the platform site against various time bases.*
7. *Development of design wave parameters through physical and economic risk evaluation.*

In areas where considerable previous knowledge and experience with oceanographic conditions exist, the foregoing sequence may be shortened to those steps needed to project this past knowledge into the required design parameters.

It is the responsibility of the platform owner to select the design sea-state, after considering all of the factors listed. In developing sea-state data, consideration should be given to the following:

For extreme conditions:

Definition of the extreme sea-states should provide an insight as to the number, height, and crest elevations of all waves above a certain height which might approach the platform site from any direction during the entire life of the structure.

Projected extreme wave heights from specified directions should be developed and presented graphically vs. their expected average recurrence intervals. Other data which should be developed includes:

1. *The probable range and distribution of wave periods associated with extreme wave heights.*
2. *The projected distribution of other wave heights in the wave train producing an extreme wave height(s).*
3. *The maximum crest elevations of the extreme sea-states.*
4. *The tides, currents, and winds which potentially occur simultaneously with the wave trains producing the extreme waves.*
5. *The nature, date and place of the event which produced the historical sea-states (e.g. Hurricane Edith, September 16, 1971, Gulf of Mexico) used in the development of the projected values.*

Alternately, this sea-state data could be presented in spectral format by plots of sea-state energy content vs. expected average return intervals.

Also of value to the platform designer (and/or owner) when performing risk analyses would be predictions of the number of extreme sea-states (containing wave heights or crest elevations exceeding a specific lower bound) from various directions which could be expected at the site during the life of the platform.

At the option of the design engineer, this wave information can be extended by a qualified hydrodynamist into pressure field or wave force data for selected sea-states. These data can be supplied in either conventional (at points in time) or spectral format.

With respect to the loads produced by waves API (1982) states the following:

Environmental loads are loads imposed on the platform by natural phenomena including wind, current, wave, earthquake, snow, ice and earth movement. Environmental loads also include the variation in hydrostatic pressure and buoyancy on members caused by changes in the water level due to waves and tides.

Environmental loads, with the exception of earthquake load, should be combined in a manner consistent with the probability of their simultaneous occurrence during the loading condition being considered.

The wave loads on a platform are dynamic in nature. For most design water depths presently encountered, these loads may be adequately represented by their static equivalents. For deeper waters or where platforms tend to be more flexible, the static analysis may not adequately describe the true dynamic loads induced in the platform. Correct analysis of such platforms requires a load analysis involving the dynamic action of the structure.

Static Wave Analysis

1. **Design Wave Parameters.** Generally the design wave(s), as selected by the platform owner, is described by the parameters of wave height, wave period, and total water depth. Alternately, design wave(s) may be specified (by the platform owner) by means of the frequency distribution of its energy content (spectral format). In either case, the values specified should be consistent with the intended use of the structure.
2. **Wave Force on a Member.** The computation of the force exerted by waves on a cylindrical object is dependent upon the ratio of the wave length to the member diameter. When this ratio is large, it may be assumed that the member does not significantly modify the incident wave. The wave force on a cylindrical object is computed as the sum of a drag force, which is related to the kinetic energy of the water, and an inertial force which is related to the acceleration of the water. This force is given by...

$$F = F_D + F_I = C_D \frac{\omega}{2g} DU|U| + C_M \frac{\omega}{g} \frac{\pi}{4} D^2 \frac{dU}{dt}$$

where:

F = hydrodynamic force vector per unit length acting normal to the axis of the member, lb/ft (N/m)

F_D = drag force vector per unit length acting normal to the axis of the member, lb/ft (N/m)

F_I = inertia force vector per unit length acting normal to the axis of the member, lb ft (N/m)

C_D = drag coefficient

w = weight density of water, lb/ft³(N/m³)

g = gravitational acceleration, ft/sec² (m/s²)

D = diameter of cylindrical member, ft (m)

U = component of the velocity vector of the water normal to the axis of the member, ft/sec (m/s)

$|U|$ = absolute value of U , ft sec (m/s)

C_M = mass coefficient

$\frac{dU}{dt}$ = component of the acceleration vector of the wave normal to the axis of the member, ft/sec² (m/s²)

Water particle velocity and acceleration are functions of wave height, wave period, water depth, distance above bottom, and time. These functions may be determined by any defensible method.

3. **Wave Position (Horizontal) Relative to Structure.** The wave crest should be positioned relative to the structure so that the wave forces have their maximum horizontal effect on the structure. Maximum stress in a locally sensitive portion of the structure may occur for a wave position, height, or period other than that causing maximum total force on the structure as a whole.

Dynamic Wave Analysis

1. **General.** A dynamic analysis of a fixed platform is indicated when the design sea-state contains significant wave energy at frequencies near the platform's natural frequencies. The wave energy content versus frequency can be described by wave (energy) spectra as determined from measured data or predictions appropriate for the platform site. Dynamic analyses should be performed for guyed towers.
2. **Waves.** Use of a random wave theory is appropriate for dynamic analysis of fixed platforms. The regular wave theories above may be used if they adequately define the frequency distribution of wave

force for platform modes that contribute significantly to the platform dynamic response.

3. Currents. Currents should be added to the wave kinematics.

4. Winds. For analysis of template, tower or caisson platforms, member forces due to wind loading may be superimposed.

For guyed towers, the analysis should include the simultaneous action of wind, waves and current. It may be appropriate to consider wind dynamics.

5. Fluid Force on a Member. Equation 2.3.1 (of API 1982) may be used to compute forces on member of template, tower, or caisson platforms. For guyed towers this equation should be modified to account for relative velocity by making the following substitution in the drag force term.

replace $U|U|$ by $(U-\dot{x})|U-\dot{x}|$

where $\dot{x}$ = component of structural velocity normal to the axis
of the member, ft/sec (M/S)
 U = as defined

This relative velocity formulation may also be used for template, tower, or caisson platforms having large deflections in which case damping values should be adjusted.

Fluid forces associated with the platform acceleration are accounted for by added mass.

6. Structural Modeling. The dynamic model of fixed platforms should reflect the key analytical parameters of mass, damping, and stiffness. The mass should include that of the platform steel, all appurtenances, conductors, and deck loads, the mass of water enclosed in submerged tubular members, and the added mass of submerged members.

Equivalent viscous damping values may be used in lieu of an explicit determination of damping components. In the absence of substantiating information for damping values for a specific structure, a damping value of five percent of critical for extreme wave and two percent of critical for fatigue analyses may be used. If relative velocity is considered in the wave force computation, reductions should be made in the damping values.

For guyed towers, response to extreme waves may be predicted ignoring structural damping. In the absence of substantiating information for damping values for a specific guyed tower, a damping value of one percent of critical may be used for fatigue analyses.

The analytical model should include the elastic stiffness of the platform and reflect the structure foundation interaction. It may be

appropriate to consider a stiffer foundation for fatigue analyses than for extreme wave response analyses. For guyed towers, these stiffnesses should be augmented to account for the guyline system. Analysis procedures may be required that account for the dynamic interaction of the tower and guyline system. All guyed tower analytical models should include geometric stiffness (large displacement effects). Forces affecting geometric stiffness include gravity loads, buoyancy, the vertical component of the guyline system reaction, and the weight of conductors including their contents.

- 7. Analysis Methods.** Time history methods of dynamic analysis are preferred for predicting the extreme wave response of template platforms, caissons, and guyed towers because these structures are generally drag force dominated. The non-linear system stiffness also indicates time domain analysis for guyed towers. Frequency domain methods may be used for extreme wave response analysis if linearization of the drag force can be justified: for guyed towers, both the drag force and non-linear guyline stiffness methods are generally appropriate for small wave fatigue analysis.

For member design, stresses may be determined from static analyses which include in an appropriate manner the significant effects of dynamic response determined from separate analyses made according to the provisions of this Section.

Deck Clearance. Large forces on a platform may result when waves strike a platform's lower deck and the concentration of equipment thereon. With the appropriate provisions made for increases in water depth due to storm and astronomical tides, and platform installation-water depth determination allowances, the guideline wave heights together with the applicable wave theories and wave periods determined from specified wave steepness may be used to compute deck clearance elevations.

Referenced level deck clearance elevations are shown in table 2.3.4 (of API 1982). These elevations are determined by the crest height associated with the reference level wave height and wave steepness, the storm and astronomical tidal heights, plus an appropriate safety allowance.

Provisions should be made for wave forces developed on deck components and equipment placed below the anticipated crest elevation associated with the guidelines wave heights.

Classification:

- (i) American Bureau of Shipping (ABS)

ABS (1983) states the following concerning environmental design criteria:

The combination and severity of environmental conditions for use in design are to be appropriate to the problem being considered and consistent with the probability of simultaneous occurrence of the

environmental phenomena. It is to be assumed that environmental phenomena may approach the installation from any direction unless reliable site-specific data indicate otherwise. The direction, or combination of directions, which produces the most unfavorable effects on the installation is to be accounted for in the design.

Design Environmental Condition

In these Rules, the combination of environmental factors producing the most unfavorable effects on the structure, as a whole and as defined by the parameters given below, is referred to as the Design Environmental Condition. This condition is to be described by a set of parameters representing the most severe environmental condition expected to occur during the life of the structure and will normally be composed of:

- a. The maximum wave height corresponding to the selected recurrence period together with the associated wind, current and limits of water depth, and appropriate ice and snow effects.
- b. The extreme air and sea temperatures.
- c. The maximum water level due to tide and storm surge.

However, depending upon site-specific conditions, consideration should be given to permutations of the combinations of events contained in item a above. The recurrence period chosen for events a, b, and c above is normally not to be less than one hundred years, unless justification for a reduction can be provided.

Specific Environmental Conditions

Waves

- a. **General** Statistical wave data from which design parameters are determined are normally to include the frequency of occurrence of various wave height groups, associated wave periods and directions. Published data and previously established design criteria for particular areas may be used where such exist. Hindcasting techniques which adequately account for shoaling and fetch limited effects on wave conditions at the site may be used to augment available data. Analytical wave spectra employed to augment available data are to reflect the shape and width of the data, and they are to be appropriate to the general site conditions.
- b. **Long-Term Predictions** All long-term and extreme-value predictions employed for the determination of design wave conditions are to be fully described and based on recognized techniques. Design wave conditions may be formulated for use in either deterministic or probabilistic methods of analysis, but the method of analysis is to be appropriate to the specific topic being considered.
- c. **Data** The development of wave data to be used in required analyses is to reflect conditions at the installation site and the type of structure.

As required, wave data may have to be developed to determine the following:

- Deck level clearance and provision for air gap
- Maximum mud line shear force and overturning moment
- Dynamic response of the structure
- Maximum stress, dynamic amplification, impact and fatigue of local structure

Breaking wave criteria are to be appropriate to the installation site and based on recognized techniques. Waves which cause the most unfavorable effects on the overall structure may differ from waves having the most severe effects on individual structural components. In general, more frequent waves of lesser heights, in addition to the most severe wave conditions, are to be investigated when fatigue and dynamic analyses are required.

With respect to loads produced by waves, ABS (1983) note the following:

Environmental loads are loads due to wind, waves, current, ice, snow, earthquake, and other environmental phenomena. The characteristic parameters defining an environmental load are to be appropriate to the installation site. Operating Environmental Loads are those loads derived from the parameters characterizing Operating Environmental Conditions. Design Environmental Loads are those loads derived from the parameters characterizing the Design Environmental Condition.

Environmental loads are to be applied to the structure from directions producing the most unfavorable effects on the structure, unless site-specific studies provide evidence in support of a less stringent requirement.

Model or field test data may be employed to establish environmental loads. Alternatively, environmental loads may be determined using analytical methods compatible with the data established. Any recognized load calculation method may be employed provided it has proven sufficiently accurate in practice, and it is shown to be appropriate to the structure's characteristics and site conditions. The calculation methods presented herein are offered as guidance representative of current acceptable methods.

Wave Loads

a. Range of Wave Parameters A sufficient range of realistic wave periods and wave crest positions relative to the structure are to be investigated to ensure an accurate determination of the maximum wave loads on the structure. Consideration should be given to other wave induced effects such as wave impact loads, dynamic amplification and fatigue of structural members. The need for analysis of these effects is to be assessed on the basis of the configuration and behavioral characteristics of the structure, the wave climate and past experience.

b. Determination of Wave Loads For structures composed of members having diameters which are less than 20% of the wave lengths being

considered, semi-empirical formulations such as Morison's equation are considered to be an acceptable basis for determining wave loads. For structures composed of members whose diameters are greater than 20% of the wave lengths being considered, or for structural configurations which substantially alter the incident flow field, diffraction forces and the hydrodynamic interaction of structural members are to be accounted for in design.

c. Morison's Equation The hydrodynamic force acting on a cylindrical member, as given by Morison's equation, is expressed as the sum of the force vectors indicated in the following equation.

$$F = F_D + F_I$$

F = hydrodynamic force vector per unit length along the member, acting normal to the axis of the member

F_D = drag force vector per unit length

F_I = inertia force vector per unit length

The drag force vector for a stationary, rigid member is given by

$$F_D = (\gamma/2g) DC_D u_n |u_n|$$

γ = weight density of water, in N/m^3 (lb/ft^3)

g = gravitational acceleration, in m/s^2 (ft/s^2)

D = projected width of the member in the direction of the cross-flow component of velocity (in the case of a circular cylinder, D denotes the diameter), in m (ft)

C_D = drag coefficient (dimensionless)

u_n = component of the fluid velocity vector normal to the axis of the member, in m/s (ft/s)

$|u_n|$ = absolute value of u_n , in m/s (ft/s)

The inertia force vector for a stationary, rigid member is given by

$$F_I = (\gamma/g) (\pi D^2/4) C_M a_n$$

C_M = inertia coefficient based on the displaced mass of fluid per unit length (dimensionless)

a_n = component of the fluid acceleration vector normal to the axis of the member, in m/s^2 (ft/s^2)

For compliant structures which exhibit substantial rigid body oscillations due to the wave action, the modified form of Morison's equation given below may be used to determine the hydrodynamic force.

$$F = F_D + F_I = (\gamma/2g) DC_D(u_n - u_n') |u_n - u_n'| \\ + (\gamma/g) (\pi D^2/4) a_n + (\gamma/g) (\pi D^2/4) C_m (a_n - a_n')$$

u_n' = component of the velocity vector of the structural member normal to its axis, in m/s (ft/s)

C_m = added mass coefficient, i.e., $C_m = C_M - 1$

a_n' = component of the acceleration vector of the structural member normal to its axis, in m/s² (ft/s²)

For structural shapes other than circular cylinders, the term $\pi D^2/4$ in the above equations is to be replaced by the actual cross-sectional area of the shape.

Values of u_n and a_n for use in Morison's equation are to be determined using a recognized wave theory appropriate to the wave heights, wave periods, and water depth at the installation site. Values for the coefficients of drag and inertia to be used in Morison's equation are to be determined on the basis of model tests, full scale measurements, or previous studies which are appropriate to the structural configuration, surface roughness, and pertinent flow parameters (e.g., Reynolds number).

Generally, for pile-supported template type structures, values of C_D range between 0.6 and 1.2; values of C_M range between 1.5 and 2.0.

d. **Diffraction Theory** For structural configurations which substantially alter the incident wave field, diffraction theories of wave loading are to be employed which account for both the incident wave force (i.e., Froude-Krylov force) and the force resulting from the diffraction of the incident wave due to the presence of the structure.

The hydrodynamic interaction of structural members is to be taken into account. For structures composed of surface piercing caissons or for installation sites where the ratio of water depth to wave length is less than 0.25, nonlinear effects of wave action are to be taken into account. This may be done by modifying linear diffraction theory to account for nonlinear effects or by performance of model tests.

Air Gap

An air gap of at least 1.5 m (5 ft) is to be provided between the maximum wave crest elevation and the lowest protuberance of the superstructure for which wave forces have not been included in the design. After accounting for the initial and expected long-term settlements of the structure, due to consolidation and subsidence in an oil reservoir area, the design wave crest elevation is to be superimposed on the still water level and consideration is to be given to wave run-up, tilting of the structure and, where appropriate, tsunamis.

(ii) Det norske Veritas (DnV)

DnV (1977) states the following concerning the required wave data:

Wave conditions may be described either by statistical or deterministic methods. The validity of the procedures used is to be documented.

The selection of suitable parameters for design purposes is in both cases to be based on the use of wave statistics or accepted hindcasting techniques.

Analytical wave power density spectra are to reflect the width and shape of typical spectra for the site considered. For open sea areas, the Pierson-Moskowitz type of spectrum will normally apply. Other spectrum formulations will be considered under special circumstances.

The short-crestedness of waves in a seaway, i.e., the angular distribution of wave energy, may be taken into account. If detailed field measurements are not available a cosine squared distribution will normally be accepted.

Extreme values of wave heights are to be expressed in terms of most probable largest values with their corresponding recurrence periods.

Long-term predictions are to be based on recognized techniques.

In design using deterministic procedures based on regular wave considerations, the wave is to be described by the parameters H and T. The design wave formulation used is to be valid for the problem considered.

The design waves or sea states are to be those resulting in the most unfavourable effects on the structure or structural part considered, taking into account the shape and size of the structure, water depth, etc. Consideration is to be given to the probability of occurrence of these design waves or sea states.

The wave period is to be specified in each case of application. It may be necessary to investigate the wave loads for a range of wave periods in order to ensure a sufficiently accurate determination of the maximum response. Normally, it will suffice to consider the following range of wave periods.

Deterministic approach:

$$\sqrt{6.5H} < T < \sqrt{15H}$$

Stochastic approach:

$$\sqrt{13H_s} < T_p < \sqrt{30H_s}$$

The wave field should be described by wave theories relevant to the conditions at the site considered.

The still water level to be used in wave load calculations for storm conditions is defined as the more unfavourable of either the highest astronomical tide level plus increase in water depth due to wind and pressure induced storm surge, or the lowest astronomical tide level.

In addition to the above DnV (1977) provides the following guidance concerning wave conditions:

A2 WAVES

A2.1.1 Wave Data

A2.1.1 Instrumental wave data

A2.1.1.1 Wave statistics should preferably be based on instrumentally recorded data.

A2.1.1.2 Attention should be given to derive relevant parameters from the recordings such as:

H_s	<i>significant wave height</i>
T_z	<i>average zero-upcrossing wave period</i>
T_c	<i>average period between wave crests</i>
ϵ	<i>spectral width</i>
T_p	<i>period of spectral peak</i>
$S(\omega)$	<i>spectral shape</i>

A2.1.2 Visual wave data

A2.1.2.1 When wave statistics are presented in terms of visual observed wave heights and periods H_v , T_v , these data may be transformed to

estimates of significant wave height H_s and average zero-upcrossing period T_z at the same probability level by the following relationships:

$$H_s = 1.68 H_V^{0.75} \quad (A2-1)$$

$$T_z = 0.82 T_V^{0.96} \quad (A2-2)$$

As Eqs. A2-1 and A2-2 are based on transformation on the same probability level, they are strictly applicable to statistical distributions only and not necessarily to individual sea state data.

A2.1.2.2 Other formulae than Eqs. A2-1 and A2-2 may be used if shown to be appropriate for the site considered.

A2.2 Short term wave statistics

A2.2.1 Short term stationary irregular sea states may be described by wave power density spectra such as the Pierson-Moskowitz or the Jonswap spectrum.

A2.2.2 In general, the modified Pierson-Moskowitz spectrum will apply. However, the Jonswap spectrum may also be used if shown to be more appropriate for the site considered.

A2.2.3 The modified Pierson-Moskowitz spectrum may be written in non-dimensional form as:

$$\frac{S(\omega)}{h_s^2 T_z} = \frac{1}{8\pi^2} \left(\frac{\omega T_z}{2\pi} \right)^{-5} \exp \left[\frac{-1}{\pi} \left(\frac{\omega T_z}{2\pi} \right)^{-4} \right] \quad (A2-3)$$

where

H_s significant wave height

$S(\omega)$ power spectral density

T wave period

T_z average zero-upcrossing wave period

ω angular wave frequency $\left(\omega = \frac{2\pi}{T} \right)$

A2.2.4 The Jonswap spectrum in dimensional form is written:

$$S(f) = \alpha \cdot g^2 \cdot (2\pi)^{-4} f^{-5} \exp \left[-\frac{5}{4} \left(\frac{f}{f_p} \right)^{-4} \right] \cdot FAC \quad (A2-4)$$

$$FAC = \gamma \exp \left[-\frac{(f-f_p)^2}{2\sigma^2 f_p^2} \right] \quad (A-2-5)$$

where

- f frequency (hz)
- f_p frequency of spectral peak (hz)
- g acceleration due to gravity (m/sec^2)
- α Phillips' constant
- σ spectral width parameter
 - $\sigma = 0.07$ if $f \leq f_p$
 - $\sigma = 0.09$ if $f > f_p$
- γ peakedness parameter.

A2.2.5 Special attention should be given to the variation of the parameters α and γ in Eqs. A2-4 and A2-5, respectively, when using the Jonswap spectrum.

A2.2.6 Directional short-crested wave power density spectra may be derived from the unidirectional long-crested wave power density spectra given in A2.2.3 and A2.2.4 as follows:

$$S(\omega, \alpha) = S(\omega) f(\alpha) \quad (A2-6)$$

where

- α angle between direction of elementary wave trains and the main direction of the short-crested wave system
- $S(\omega, \alpha)$ directional short-crested wave power density spectrum
- $S(\omega)$ unidirectional long-crested wave power density spectrum
- $f(\alpha)$ directionality function.

Energy conservation requires that the directionality function fulfills the following requirement:

$$\int_{\alpha_{MIN}}^{\alpha_{MAX}} f(\alpha) d\alpha = 1 \quad (A2-7)$$

A2.2.7 In the absence of more reliable data the following directionality function may be applied:

$$f(\alpha) = \frac{1}{2} \cos^2 \alpha \text{ for } -\pi/2 \leq \alpha \leq \pi/2 \quad (A2-8)$$

A2.2.8 Other directionality functions than given in A2.2.7 may be accepted if shown to be appropriate for the site considered.

A2.2.9 The statistical distribution of individual wave heights in an irregular short-term stationary sea state may usually be described by the Rayleigh distribution.

A2.3 Long-term wave statistics

A2.3.1 The significant wave height H_s versus probability of exceedance $Q(H_s)$ and the frequency distribution $p(\bar{T}_z)$ of the average zero-upcrossing wave period $\bar{T}_z$ may be obtained from the wave statistics. Examples are shown in Figures A.1 and A.2.

A2.3.2 Provided that the statistics of H_s may be described by a two-parameter Weibull distribution function, the wave height H_n at a probability level $Q=10^{-n}$ is found from:

$$H_n = \frac{a \cdot b_1}{\sqrt{2}} (2,3 \cdot n)^{k_1} \quad (A2-9)$$

The coefficients b_1 and k_1 are given in a table, and depend on the parameter "m" defined in another figure A.2. The parameter "a" is also defined.

A2.3.3 The "N year wave", i.e. the most probable largest individual wave height during N years, may be found by introducing the following value for n in Eq. A2-9.

$$n = 6,7 + \log_{10} N \quad (A2-10)$$

A2.3.4 When the value H_r at a reference probability level $Q = 10^{-r}$ is given, the value H_n at another probability level 10^{-n} is found from Eq. A2-11.

$$H_n = H_r \left(\frac{n}{r} \right)^{k_1} \quad (A2-11)$$

Some data for the most probable largest wave heights in 100 years are given in table A4 (DnV 1982). The probability level $Q = 10^{-8.7}$, which corresponds to once in a period of 100 years, is chosen as a reference level ($r=8,7$).

With respect to loads produced by waves DnV (1977) notes the following:

Wave induced loads are to be determined by use of generally recognized methods taking proper account of water depth, size, shape and type of structure.

In the analytical determination of wave loads, the hydrodynamic coefficients used in the analysis may be determined on the basis of published data, model tests, or full scale measurements. The hydrodynamic coefficients are subject to approval.

For structures of complex shape for which analytical determination of wave loads may not yield sufficient accuracy, the wave loads are to be determined by use of reliable and adequate model tests.

The following contributions are to be considered in the determination of wave induced loads;

- potential pressure forces including the Froude-Krilov forces
- potential or viscous wave drift forces
- drag forces resulting from boundary layer effects
- impact loads

Wave induced loads on structures consisting of members with cross sectional dimensions less than approximately 1/5 of the wavelength may be calculated by use of Morison's equation.

The combined effect of simultaneous drag and inertia forces is obtained by vectorial addition.

Where appropriate, account is to be taken of possible change in water particle velocity and acceleration caused by the structure interfering with the wave system.

In lieu of more exact data, the hydrodynamic coefficients used in Morison's equation may be taken.

Closely spaced members may cause solidification effects. In lieu of more exact data the formulae given in Appendix B may be used for selection of appropriate hydrodynamic coefficients for such cases.

For structures having characteristic dimensions which are not negligible compared to the wave length and which will influence the flow field, the determination of wave loads will normally require application of methods such as sink-source techniques or finite fluid element methods.

Hydrodynamic interaction between large immersed members of the structure are to be considered where such effects may be significant.

Impact loads from waves are to be determined according to recognized theoretical methods or according to relevant data from model tests or full scale measurements. Attention is to be paid to possible dynamic amplification of the response.

The possibility of flow induced cyclic loads is to be considered.

In addition to the above DnV (1977) provides the following guidance concerning the calculation of wave loads.

B2 WAVE LOADS

B2.1 Wave loads on slender members

B2.1.1 Wave loads on slender members having cross-sectional dimensions sufficiently small to allow the gradients of liquid particle accelerations and velocities in the direction normal to the member to be neglected, may be calculated using Morison's equation. Normally, Morison's equation is applicable when the following condition is satisfied:

$$\lambda > 5 D$$

where

λ the wave length

diameter or other projected cross-sectional dimension of a structural member.

B2.1.2 In cases where Morison's equation is applicable, the inertia force may be calculated by the formula:

$$F_m = \rho V \alpha + \rho C_m V_r \alpha_r \quad (B2-1)$$

where

F_m inertia force acting normal to the axis of the member. If sectional hydrodynamic added mass coefficient and volume per unit length are used F_m is a force per unit length. If three-dimensional hydrodynamic added mass coefficient and complete volume of member are used F_m is the total force on the member.

ρ	mass density of fluid
C_m	two- or three-dimensional added mass coefficient. In general C_m is a function of cross-sectional shape and orientation of body, Reynold's number, Keulegan-Carpenter number and roughness. C_m values as function of the former two factors are usually accepted.
a_r	relative acceleration between liquid particle and member normal to the member axis.
V	volume or sectional volume (volume per unit length) of the liquid displaced by the member.
V_R	a reference volume (total or sectional) to which the hydrodynamic added mass coefficient may be related.

B2.1.3 Tentative values of C_m for different cross-sectional shapes are given in tables for two- and three-dimensional bodies respectively. These values are based on potential theory and are thus only accounting for cross-sectional shapes and orientation. Other values for C_m may be used provided that the chosen values can be justified.

The C_m value is to be used in conjunction with the acceleration of water particles as calculated using an appropriate wave theory.

B2.1.4 In the cases where Morison's equation is applicable the drag force may be calculated by the formula:

$$F_D = \frac{1}{2} \rho C_D v_r |v_r| A \quad (B2-2)$$

where

F_D	drag force normal to the axis of the member.
C_D	drag coefficient for the flow normal to the member axis.
ρ	mass density of liquid.
v_r	liquid particle velocity relative to the member normal to the member axis.
$ v_r $	absolute value of v_r introduced to obtain proper sign of F_D .
A	area of member taken as the projection on a plane normal to the force direction.

B2.1.5 Two-dimensional drag coefficient for smooth circular cylinders in steady uniform flow as a function of Reynold's number is given in Figure B.1 (DnV 1977).

B2.1.6 Tentative values of hydrodynamic drag coefficients for a circular cylinder of various roughnesses in steady flow are shown in figure B-2 (DnV 1977). The roughness is expressed as the roughness number k_r/D where k_r is the effective roughness height and D diameter of member. In absence of more reliable data on the roughness number, $k_r/D = 1.10^{-2}$ may be used to account for marine growth.

Tentative values of drag coefficients in the supercritical regime in steady flow for some in-service-marine-roughnesses are given in figures B-3 (DnV 1977).

B2.1.7 Tentative values for the hydrodynamic drag coefficient C_D for other smooth cross-sectional shapes in steady flow may be chosen equal to corresponding values for the wind shape coefficient given in tables B-2 and B-4 (DnV 1977).

B2.1.8 Hydrodynamic drag coefficients for a rough cylinder in oscillating flow are subject to approval in each case.

The drag coefficient for a smooth cylinder in oscillating flow should not be less than 0.7.

B2.1.9 When using Morison's equation to calculate the hydrodynamic loads on a structure one should preferably take into account the variation of C_D as function of Reynold's number, the Keulegan-charpenter number and the roughness number in addition to the variation of cross sectional geometry.

B2.2 Impact Loads From Waves

B2.2.1 Slamming

B2.2.1.1 Horizontal members in the splash zone are susceptible to forces caused by wave slamming when the member is being submerged. The dynamic response of the member should be accounted for.

B2.2.1.2 For a horizontal member the slamming force per unit length may be calculated as:

$$F_s = \frac{1}{2} \rho C_s D v^2 \quad (B2-3)$$

where

F_s slamming force per unit length in the direction of the velocity.

ρ mass density of fluid.

C_s slamming coefficient.

D member diameter.

v velocity of water surface normal to the surface of the member.

B2.2.1.3 The slamming coefficient C_s may be determined using theoretical and/or experimental methods. For smooth, circular cylinders the value of C_s should not be taken less than 3.0.

B2.2.1.4 As the slamming force is impulsive, dynamic amplification must be considered when calculating the response.

For a horizontal member fixed at both ends, dynamic amplification factors of 1.5 and 2.0 are recommended for the end moments and the midspan moment, respectively.

B2.2.1.5 It is generally recognized that wave slamming may cause fatigue. A procedure for evaluating the fatigue effects is outlined in Appendix C (DnV 1977).

B2.2.2 Shock Pressure From Breaking Waves

B2.2.2.1 Breaking waves causing shock pressures on vertical surfaces should be considered.

B2.2.2.2 In absence of more reliable methods the procedure described in B2.2.1.2 may be used to calculate the shock pressure.

B2.2.2.3 The coefficient C_s depends on the configuration of the area exposed to shock pressure. A lower limit of C_s for circular cylinders is 3.0. The coefficient C_s is subject to approval by DnV.

B2.2.2.4 The area exposed to shock pressure may be taken as a sector of 45 degrees with a height of $0.25 H_{nB}$, where H_{nB} is the most probable largest breaking wave height in n years. The region from SWL to the top of the wave crest should be investigated for the effects of shock pressure.

B2.2.2.5 The impact velocity, v , should be taken as that corresponding to the most probable largest breaking wave height in n years. The most probable largest breaking wave height may be taken as 1.4 times the most probable largest significant wave height in n years.

A.1.2 Floating Structures

Design:

No publications prepared for use by design organizations, other than those prepared by the Classification Societies, were reviewed during this study.

Classification:

- (i) American Bureau of Shipping (ABS).

ABS 1980 states that for purposes of classifying mobile drilling units the following are to be included in the owners submission.

A description of environmental conditions including minimum anticipated atmospheric and sea temperatures, for each mode of operation.

Resultant forces and moments from wind, waves, current, mooring and other environmental loadings.

Submitted calculations are to be suitably referenced. Results from model tests or dynamic response calculations may be submitted as alternatives or a substantiation for required calculations.

With regard to the calculation of wave loadings ABS 1980 states:

Wave criteria specified by the Owner may be described by means of wave energy spectra or by theoretical waves having shape, size, and period appropriate to the depth of water in which the unit is to operate. Waves are to be considered as coming from any direction relative to the unit. Consideration is to be given to waves of less than maximum height where due to their period, the effect on various structural elements may be greater.

Examples of wave theories are given in Appendix A, (of ABS 1980) and force coefficients for use therein are also given. Consideration will be given to any other valid theoretical approach, or authoritative test data. Examples of calculating the forces resulting from waves are indicated in Appendix A, (of ABS 1980) using the method appropriate to the depth of water selected. In making the calculations, the minimum drag coefficient C_D is to be the same as C_S from Tables provided and the minimum inertia coefficient C_m is to be obtained from Tables provided.

Wave Induced Vibrations. Consideration is to be given to the possibility of structural vibrations induced by the action of waves.

Part 1 of Appendix A (of ABS 1980) provides methods for calculating drag forces and moments, and inertia forces and moments on vertical cylinders in shallow water using an interpolation between the solitary and Airy Theories, and several others.

Part 2 of Appendix A (of ABS 1980) contains a development of the sine wave theory for deep water waves which may be used to determine the drag and inertial forces on the underwater portions of drilling units, which may be operating in locations where the depth of water exceeds three hundred feet. The appendix notes that other methods of determining the force which may be deemed appropriate will be considered provided they are referenced and supported by calculations.

With regard to underdeck clearance ABS 1980 states:

A crest clearance of either 1.2m (4 ft) or 10% of the combined storm tide, astronomical tide, and height of the maximum wave crest above the mean low water level, whichever is less, between the underside of the

unit in the elevated position and the crest of the wave is to maintained. This crest elevation is to be measured above the level of the combined astronomical and storm tides.

- (ii) Det Norske Veritas (DnV)
DnV (1982) provide the following description of the required wave conditions.

All environmental phenomena which may contribute to structural damages are to be considered. Such phenomena are wind, waves, currents, ice, earthquake, soil conditions, temperature, fouling, corrosion, etc.

The specified environmental design data used for calculating design loads for intact structure are to correspond with the most probable largest values for a return period of 100.

For damaged structure calculations a return period of one year is to be used.

The environmental design data may be given as maximum wave heights with corresponding periods and wind and current velocities and design temperatures or as acceptable geographical areas for operation. In the latter case the Builder is to specify the operational areas and submit documentation showing that the environmental data for these areas are within the environmental design data.

The statistical data used as a basis for design must cover a sufficiently long period of time.

The liquid particle velocity and acceleration in regular waves are to be calculated according to recognized wave theories, taking into account the significance of shallow water and surface elevation.

Linearized wave theories may be used when appropriate. In that case the particle velocity in the wave crest above still water level is normally to be taken equal to the velocity at the still water level.

The wave design data are to represent the maximum wave heights specified for the unit, as well as the maximum wave steepness.

The wave lengths are to be selected as the most critical ones for the response of the structure or structural part to be investigated.

Breaking wave height as a function of still water depth is given in Fig. 1. (of DnV 1982)

Guidance:

For unrestricted operation the wave steepness with return period 100 years may normally be limited according to:

Regular design wave:

The maximum regular wave height as function of wave period:

$$H_w = \begin{cases} 0.22T^2 & \text{for } T \leq 6s \\ \frac{T^2}{4.5 + 0.02(T^2 - 36)} & \text{for } T > 6s \end{cases}$$

T = design wave period in s.

H_w = design wave height in m.

Short term irregular states of sea:

The sea state steepness is not to be less than:

$$S = \frac{2\pi}{g_0} \frac{H_s}{T_z^2} = \begin{cases} 1/10 & \text{for } T_z < 6s \\ 1/15 & \text{for } T_z \geq 12s \\ \text{Linear interpolation} & \text{for } 6 < T_z < 12s \end{cases}$$

which may be expressed in terms of significant wave height:

$$H_s = \begin{cases} 0.156 T_z^2 & \text{for } T_z \leq 6s \\ 0.206 T_z^2 - 0.0086 T_z^3 & \text{for } 6 < T_z \leq 12s \\ 0.104 T_z^2 & \text{for } T_z > 12s \end{cases}$$

H_s and T_z are defined in Sec. 3 B 302 (of DnV 1982).

The maximum wave height corresponding to formulae above need normally not be taken larger than 32 m.

Wave conditions which are to be considered for design purposes, may be described either by deterministic design wave methods or by stochastic methods applying wave energy spectra.

Short term irregular states of sea are described by means of wave energy spectra which are characterized by significant wave height (H_s), and average zero-up-crossing period (T_z).

Analytical spectrum expressions are to reflect the width and shape of typical spectra for the considered site. For open deep-water sea areas, the Pierson-Moskowitz type of spectrum will normally apply. For shallow water a more narrow spectrum may be used when found appropriate (e.g. a Jonswap spectrum).

The shortcrestedness of waves in a seaway, i.e. the directional dispersion of wave energy, may be taken into account. The principal direction of wave encounter is defined as the direction of maximum wave energy density.

The modified Peirson-Moskowitz spectrum may be written in non-dimensional form as:

$$\frac{S(\omega)}{H_s^2 T_z} = \frac{1}{8\pi^2} \left(\frac{\omega T_z}{2\pi} \right)^{-5} \exp \left[\frac{-1}{\pi} \left(\frac{\omega T_z}{2\pi} \right)^{-4} \right]$$

The Jonswap spectrum in dimensional form is written:

$$S(f) = \alpha \cdot g_o^2 \cdot (2\pi)^{-4} f^{-5} \exp \left[-\frac{5}{4} \left(\frac{f}{f_p} \right)^{-4} \right] \cdot \text{FAC}$$

$$\text{FAC} = \gamma \exp \left[-\frac{(f-f_p)^2}{2\sigma^2 f_p^2} \right]$$

Special attention should be given to the variation of the parameters α and γ when using the Jonswap spectrum.

Definitions:

- H_w = the individual wave height in m, i.e. the vertical distance from crest to trough.
- H_s = the average of the highest one third of the individual wave heights in m in a short term stationary state of sea (significant wave height).
- T = the average zero-up-crossing period in s.
- $S(\omega)$ = power spectral density.
- T_z = wave period in s.
- ω = angular wave frequency $\left(\omega = \frac{2\pi}{T} \right)$
- f = frequency (Hz).
- f_p = frequency of spectral peak (Hz).
- α = Phillips' constant.

σ = spectral width parameter.

γ = peakedness parameter.

The long term behaviour of the sea is described by means of a family of wave spectra, the probability of occurrence for each spectrum being taken into account. For this purpose one needs the joint probability density function for H_S and T_Z , which can be obtained from wave statistics. A description of the long term state of sea based on the use of hindcastings can also be accepted.

Wave statistics for individual principal directions of wave encounter should be used, otherwise conservative assumptions are to be introduced.

Extreme wave heights are expressed in terms of wave heights having a low probability of occurrence.

The "N year wave height" is the most probable largest individual wave height during N years. This is equivalent to a wave height with a return period of N years.

In deterministic design procedures, based on simple regular wave considerations, the wave is to be described by the following parameters:

- wave period.
- wave height.
- wave direction.
- still water depth.

The choice of an appropriate design wave formulation has to be based on particular considerations for the problem in question. Shallow water effects are to be accounted for. Different wave theories may be accepted by the Society. However, the limitations of the theories used are to be duly acknowledged.

The design waves are to be those which produce the most unfavourable loads on the considered structure, taking into account the shape and size of structure, etc.

The wave period is to be specified in each case of application. It may be necessary to investigate a representative number of wave periods, in order to ensure a sufficiently accurate determination of the maximum loads.

The basic wave load parameters and response calculation methods in these Rules are to be used together with a deterministic wave load analysis with the most unfavourable combinations of height, period and direction of the waves.

If a stochastic wave load analysis is used, a more accurate assessment of load and strength parameters may be required, e.g. to account for marine growth. As an alternative the extreme wave loads may be multiplied with an appropriate load factor.

The still water level to be used in wave load calculations for survival condition for self-elevating units, is defined as the high astronomical tide level plus increase in water depth due to wind induced storm surge. If sufficient statistical data are available, the still water level corresponding to a 100-year return period may be used.

High and low astronomical tide are the high and low tide due to attraction of the sun and the moon, in contrast to a meteorological tide caused by meteorological conditions.

A.2. Fatigue Calculations

The references cited in section A-1 provide little guidance concerning the specific requirements for wave data for fatigue calculations.

The American Bureau of Shipping 1980 states *"When a fatigue analysis is performed, a long term distribution of the stress range, with proper consideration of dynamic effects, is to be obtained for relevant loadings anticipated during the design life of structure,"* Section 6.13 of ABS 1980 Fatigue Assessment states *"For structural members and joints where fatigue is a probable mode of failure, or for which past experience is insufficient to assure safety from possible cumulative fatigue damage, an assessment of fatigue life is to be carried out. Emphasis is to be given to joints and members in the splash zone, those that are difficult to inspect and repair once the structure is in service, and those susceptible to corrosion-accelerated fatigue."*

"For structural members and joints which require a detailed assessment of cumulative fatigue damage, the results of the assessment are to indicate a minimum expected fatigue life of twice the design life of the structure where sufficient structural redundancy exists to prevent catastrophic failure of the structure of the member or joint under consideration. Where such redundancy does not exist or where the desirable degree of redundancy is significantly reduced as a result of fatigue damage, the result of a fatigue assessment is to indicate a minimum expected fatigue life of three times the design life of the structure."

Det norske Veritas (1977) provides the following comment on the method of analysis as follows:

"As most of the loads which contribute to fatigue are of random nature statistical considerations will normally be required for determination of the long term distribution of fatigue loading effects. Deterministic or spectral analysis may be used. The method of analysis used is subject to acceptance."

Det norske Veritas (1982) provides further guidance concerning the required wave statistics:

"A reasonable number of constant amplitude stress blocks and corresponding number of stress cycles are to be evaluated from a long term stress distribution determined for the planned life of the structures. All direction of wind, waves and current relative to the unit, are normally to be assumed equally probable. If, however, statistics show clearly that wind, waves and current of the prescribed probability are different for different directions, this may be taken into account in the analysis".

It is concluded that, ideally, fatigue calculations would require directional spectra representative of storm events that produce critical stress levels in typical structures during a minimum of a twenty year period. In practice, bi-variate frequency of occurrence (scatter) diagrams of wave height and period parameters (typically characteristic wave height and peak period, presented for directional sectors, are required. These should be based on 20 years of data (as may be achieved from wave hindcast study).

A.3 Design and Assessment of Operations

There are many modes of operations of a structure designed for the exploration or recovery of hydrocarbons. The primary requirement for wave data is in the determination of the frequency of occurrence and duration of periods when an operation must be restricted for reasons of safety.

ABS 1980 refer to three modes of operations for mobile structure as follows:

- a) **Normal Drilling Conditions** *Normal drilling conditions are conditions wherein a unit is on location to drill or perform other related operations where the combined environmental and operational loadings are within the appropriate design limits established for those operations. The unit may be either afloat or supported by the sea bed.*
- b) **Severe Storm Condition** *A severe storm condition is a condition during which a unit may be subjected to the most severe environmental loadings for which it was designed. During the severe storm condition it may be necessary to discontinue drilling or similar operations, due to the severity of the environmental loadings. The unit may be either afloat or supported by the sea bed, as applicable.*
- c) **Transit Conditions** *All unit movements from one geographical location to another.*

ABS (1983) state the following when referring to fixed structures:

Operating Environmental Conditions

For each intended major function or operation of the installation, a set of characteristic parameters for the environmental factors which act as a limit on the safe performance of an operation or function is to be determined. Such operations may include, as appropriate, transportation, offloading and installation of the structure, drilling or producing operations, evacuation of the platform, etc. These sets of conditions are herein referred to as Operating Environmental Conditions.

DnV (1977) provides definitions for five design phases. Analysis of downtime during each of these phases may be required and each may require different presentations of wave data. The definitions are as follows:

Design phases - *the design life of an offshore structure is normally divided into five design phases as defined in the following:*

- **Phase C - Construction:**
This phase includes construction ashore and construction afloat.
- **Phase T - Transportation:**
This phase includes transportation of the structure or a part of the structure, including transportation from shore to sea, or from shore to barge, and mooring operations in protected waters.

Phase I - Installation:

This phase includes installation of the structure at its final location, i.e., the period from start of submerging from transport position or launching from barge, including piling, grouting or anchoring, until the platform is ready for normal operation.

Phase O - Operation:

This phase is the period from completed installation till condemnation or removal from location.

Phase R - Retrieval:

This phase includes retrieval or removal of the structure.

The planning of operations requires a suitable data base from which the frequencies of occurrence of events causing downtime, and their duration, can be determined. It may also be necessary to determine the average duration of continuous periods when no operational restrictions occur.

The characteristics of this data base is that it provides continuous coverage (by observations, recordings or estimates made every 3 hours for example) over a long enough period that statistics representative of an average year may be determined. It is estimated that a three to five year period of measurements is required for this purpose.

It must also be noted that other environmental conditions such as high wind speeds, currents, presence of ice, reduced visibility or low temperatures may restrict operations and simultaneous measurements or estimates may be required for the proper design of operations. The most important phenomena for which simultaneous measurements are required are waves, winds and water currents.

API (1982) provides the following guidance concerning the data and data presentations required for the design and assessment of operations.

For operating conditions (for both seas and swells):

- 1. For each month and/or season, the probability of occurrence and average duration (persistence data) of various sea-states (e.g., waves higher than 10 ft (3 m) from specified directions in terms of general sea-state description parameters (e.g., the significant wave height/average height of the highest one-third of the waves in the train/and the average wave period during a certain duration of time).*
- 2. The wind velocities, tides and currents occurring simultaneously with the wave trains.*
- 3. The percentage of waves having heights and directions within specified ranges (e.g., 10 to 12 ft. (3 to 4 m) high waves from SSE + 11.25) during each month and/or season.*

A.4 Requirements of Regulatory Agencies

The regulations developed by the Canadian Oil & Gas Lands Administration (COGLA) do not provide detailed guidance concerning the form of wave data and type of engineering procedures that involve wave data which should be submitted with applications for Drilling Program Approval. Guidance notes that present estimates of the wave climate of Canada are not available as they are for the North Sea.

Some of the requirements contained in the Canada Oil & Gas Drilling regulations (PC 1979-25 ammended by PC 1980-2111) are as follows.

PART 1

Drilling Program Approval

Application for a Drilling Program Approval

8. *The following information shall be furnished and forwarded with the application for approval of a drilling program referred to in section 7 by an applicant:*
 - (c) *particulars of any special conditions or circumstances that may affect the safety of the drilling operations;*
 - (f) *where the program is to be carried out offshore,*
 - (ii) *the prevailing environmental conditions in the area of the program,*
 - (g) *in the case of every drilling unit used or intended to be used by an applicant during the program,*
 - (ii) *the details of the structural design of the drilling unit on which the applicant relies to show that the drilling unit has strength adequate to withstand conditions of extreme loading caused by a combination of the most unfavourable functional and environmental loads,*
 - (iii) *a description of the relationship between the performance characteristics of each drilling unit and the prevailing environmental conditions in the area of the program, and*
 - (h) *where the program is to be carried out offshore, the details on which the applicant relies to show that*
 - (i) *the drilling unit that is to be used in the program has sufficient dynamic stability to permit emergency drilling operations, such as controlling a kick or disconnecting from the blowout preventer stack, to be conducted under conditions of the statistical one-year-storm calculated to occur during the period of the year that the program is to be conducted,*
 - (ii) *where anchors are to be used to hold the drilling unit on the well location, the method and equipment to be used to hold the*

drilling unit is capable of maintaining the unit within the anchor pattern under conditions of the statistical fifty-year-storm calculated to occur during the period of the year that the program is to be conducted,

(iii) the drilling unit to be used in the program is designed and constructed to survive conditions of the statistical one-hundred-year-storm calculated to occur during the period of the year that the program is to be conducted,

(vi) the support craft are designed and constructed to operate safely in support of all drilling and related operations in which the craft are to be engaged.

COGLA have issued "Physical Environmental Guidelines for Drilling Programs in The Canadian Offshore". These guidelines contain standards and procedures for collecting and reporting meteorological and oceanographic data and have been issued with respect to section 176(2) (for example) of the Drilling Regulations. This states, with respect to waves, that where the drilling program is offshore the operator shall observe and record at least every three hours the wave direction, height and period and the swell direction, height and period.

The following contains extracts from these guidelines where they refer to the collection of wave data:

Physical Environmental Requirements

1.0 Data Collection

Operators will be required to make meteorological and oceanographic measurements in connection with drilling operations in accordance with these Guidelines unless COGLA has agreed to other arrangements. The standards and procedures for collecting and reporting meteorological and oceanographic data are described below.

Automatic instrumentation is the preferred means of measurement; however, cloud conditions, present and past weather, visibility, wave direction, sea ice and ice accretion are normally determined visually and recorded in a log.

1.1 Parameters to be Observed or Measured

1.1.10 Sea State - instantaneous values of sea and swell height, period and direction.

1.1.15 Surface ocean wave spectra - instrumentation should be located such that the wave field as observed is not disturbed by the drilling unit. The Marine Environmental Data Service (MEDS), Department of Fisheries and Oceans, Ottawa, may provide a Datawell Waverider Buoy for wave measurements. Other instrumentation may be used but the specifications stated must be met and the recording sequence should be consistent with a twenty-minute continuous wave record every three hours and have the capability for continuous operation during storms.

Other data collection requirements specified in the guidelines include wind, temperature, visibility, ice, precipitation, and currents.

APPENDIX B

GLOSSARY OF WAVE PARAMETERS

(From PIANC 1973)

APPENDIX B
GLOSSARY OF WAVE PARAMETERS
(from PIANC 1973)

1. Parameters defined directly from a wave record.

Z_1	The "mean water depth" is the vertical distance between the mean water level and the bottom. Z_1 is always a positive quantity.
Z_2	The "still water depth" is the vertical distance between the still water level and the bottom. Z_2 is always a positive quantity.
Z_3	The "mean record water depth" is the vertical distance between the mean record level and the bottom. Z_3 is always a positive quantity.
η	The vertical distance of the instantaneous water surface to the mean record level, positive is used for the upward direction.
a_c	The crest amplitude is the vertical distance between the mean record level and a crest or maxima.
$a_{z,c}$	The zero-crossing crest amplitude is the maximum vertical distance between the mean record level and the maximum level that occurred between an upward and a following downward going zero crossing. $a_{z,c}$ is always a positive quantity.
a_t	The trough amplitude is the vertical distance between the mean record level and a trough or minima.
$a_{z,t}$	The zero-crossing trough amplitude is the maximum vertical distance between the mean record level and the minimum level that occurred between a downward and a following upward going zero-crossing. $a_{z,t}$ is always a positive quantity.
Y_1	The maximum wave level is the maximum zero-crossing crest amplitude observed in a record = $a_{z,c,max}$
Y_2	The minimum wave level is the maximum zero-crossing trough amplitude observed in a record. Note that Y_2 is always positive and is = $a_{z,t,max}$
H	The "wave height" is the vertical distance between a crest and the immediately preceding trough.
H_z	The zero up-crossing wave height is the sum of $a_{z,c}$ and the immediately preceding $a_{z,t}$. (Confusion may exist between the use of Hz for Hertz and H_z for the zero-crossing wave height.)
H_{max}	The maximum wave height is the maximum H as observed in a specified period of time, which should always be stated.

$H_{z,max}$	The maximum zero up-crossing wave height is the maximum H_z as observed in a specified period of time, which should always be stated.
T_z	The zero-crossing wave period is the interval of time between two adjacent downward going zero-crossings.
$T_{Hz,max}$	The period of the maximum zero up-crossing wave height is the interval between the preceding and the following downward going zero-crossings of a maximum zero up-crossing wave height.

2. Statistical parameters.

$H_{n\%}$	The wave height exceedance is the value of H exceeded by $n\%$ of all waves occurring in a specified period. For example $H_{1\%}$ (20 min.) is the wave height that is exceeded by only 1% of all waves occurring in a 20 min. period of observation. In particular one may use $H_{50\%}$ the median wave height. In some countries, the notation $H_{n\%}$ is used to denote the average of the highest $n\%$ of the waves in a record. Care should be exercised to properly interpret the intended meaning in individual publications.
$H_{z,n\%}$	The zero up-crossing wave height exceedance is the value of H_z that is exceeded by $n\%$ of all waves occurring in a specified period.
$\bar{H}_{1/n}$	The average of the highest $1/n^{\text{th}}$ of the H values for a stated period of time. In some countries, the notation $H_{1/n}$ is used to denote the wave height exceeded by $1/n^{\text{th}}$ of the waves. Care should be taken to properly interpret the intended meaning in individual publications.
$\bar{H}_{z,1/n}$	The average of the highest $1/n^{\text{th}}$ of the H_z values for a stated period of time. In particular one may use $\bar{H}_{z,1/3}$ (20 min.).
$\bar{T}_2$	The zero-crossing wave period is the average of zero-crossing intervals as obtained by dividing the record duration by the number of times the water elevation crosses the mean record level in one direction.
$\bar{T}_c$	The average crest period is the time obtained by dividing the record duration by the total number of crests in this record.
ϵ_T	The spectral width parameter (Broadness factor) defined by $\epsilon_T^2 = 1 - (\bar{T}_c / \bar{T}_z)^2$.
$p(x)$	The probability density function of a wave parameter x , such as height or period.
$P(x)$	The distribution function of a wave parameter x and is known as $P(x) = \int_{-\infty}^x p(\lambda) \cdot d\lambda$.

3. Parameters derived from the variance spectrum analysis.

f_p The peak frequency is the frequency at which the maximum variance spectral density occurs.

T_p The peak period = $1/f_p$.

$S(f)$ The variance spectral density function of a wave record is the density distribution of the variance η as a function of frequency.

$S(f, \alpha)$ The directional variance spectral density of a wave record is the density distribution of the variance η as a function of frequency and direction.

m_n The n^{th} moment of the variance spectral density function. $m_n = \int_a^b f^n S(f) df$.
Typically $a = 0$ $b = \infty$.

σ The root mean square value is the square root of the variance or the average squared displacement of the water surface from the mean record level $\sigma^2 = \bar{\eta}^2 = m_0$.

H_{mo} The characteristic wave height = 4σ for a stated period of time.

$T_{m_{a,b}}$ The length of time defined by two spectral moments m_a and m_b . In particular, one may use the "average period" defined as m_0/m_1 or m_{-1}/m_0 .

ϵ_s The spectral width parameter defined by

$$\epsilon_s^2 = \frac{m_0 \cdot m_4 - m_2^2}{m_0 \cdot m_4}$$

4. Parameters derived from visual observations.

H_v The wave height as estimated from visual observation.

T_v The wave period as obtained visually.

5. Significant wave height.

The current use of this term, significant wave height, is confusing. There appear to be 3 common concepts of significant wave height:

a) the wave height parameter as computed from the RMS-value of the record;

- b) the average of the highest one third of the "wave heights" obtained autographically; or
- c) the visually estimated wave height following W.M.O. practices.

As noted in the above, the following three definitions are recommended:

H_{m0}	The characteristic wave height = $4 * \sigma$ for a stated period of time.
$H_{Z,1/3}$	(or H_3) The average of the highest one third of the zero up-crossing wave heights for a stated period of time.
H_v	The wave height as estimated from visual observation.

APPENDIX C

PERIODS OF COVERAGE FOR MEDS WAVE STATIONS

(as of January 16, 1984)

CANADIAN MARINE DATA INVENTORY REPORT

D. HISTORICAL WAVE MEASURING STATIONS

REFERENCE C81043D01

PAGE 01

TYPE : WR - WAVERIDER, PC - PRESSURE CELL, ST - STAFF GAUGE

ANALYSIS : S - SPECTRAL

IDENTIFICATION		LOCATION				DATES		INSTRUMENT	
ID.	NAME	IHB ZONE	LATITUDE DD-MM-SS	LONGITUDE DDD-MM-SS	DEPTH METRES	START DD/MM/YY	STOP DD/MM/YY	TYPE	SUCCESS-% ANALYSIS
019	ADMIRALS BEACH	2100	47-01-48N	053-37-18W	55	31/03/74	22/01/75	WR	80-100% S
086	BARROW STRAIT	2500	74-37-00N	092-20-00W	46	16/08/76	20/08/76	WR	50-80 % S
073	BATTLE ISLAND	2950	48-41-24N	087-33-06W	219	16/05/73	17/11/73	WR	80-100% S
127	BAY BULLS	2100	47-18-51N	052-48-39W	17	21/07/77	13/11/77	WR	80-100% S
127	BAY BULLS	2100	47-18-51N	052-48-39W	17	11/01/78	22/01/78	WR	0-50 % S
145	BEN OCEAN LANCER (ACADIA K-62)	1800	42-51-42N	061-55-21W	955	03/05/78	03/08/78	WR	50-80 % S
141	BEN OCEAN LANCER (HOPEDALE E-33)	2100	55-52-00N	058-51-00W	562	18/08/78	28/09/78	WR	50-80 % S
138	BEN OCEAN LANCER (HEKJA)	2200	62-11-08N	062-58-17W	360	22/07/79	10/08/79	WR	80-100% S
138	BEN OCEAN LANCER (HEKJA)	2200	62-11-08N	062-58-17W	360	25/07/80	05/10/80	WR	50-80 % S
138	BEN OCEAN LANCER (NORTH BJARNI F-06)	2100	55-31-06N	057-42-27W	144	27/06/81	05/10/81	WR	50-80 % S
166	BOWDRILL I (BANQUEREAU C-21)	1800	44-10-42N	058-34-00W	85	07/01/82	20/10/82	WR	80-100% S
082	BURLINGTON (CCIW)	2950	43-20-32N	079-46-16W	38	31/10/72	16/12/72	WR	0-50 % S
082	BURLINGTON (CCIW)	2950	43-20-32N	079-46-16W	38	22/08/73	18/09/73	WR	0-50 % S
082	BURLINGTON (CCIW)	2950	43-20-32N	079-46-16W	38	15/11/73	15/12/73	WR	0-50 % S
077	BURLINGTON (INNER)	2950	43-17-18N	079-43-06W	26	04/06/76	16/06/76	WR	0-50 % S
077	BURLINGTON (INNER)	2950	43-16-12N	079-45-24W	13	22/09/76	28/09/76	WR	0-50 % S
077	BURLINGTON (INNER)	2950	43-16-48N	079-44-18W	14	27/04/77	23/11/77	WR	50-80 % S
077	BURLINGTON (INNER)	2950	43-16-08N	079-44-03W	14	27/09/78	30/11/78	WR	50-80 % S
192	CANMAR I (UKALERK)	2800	70-11-18N	132-45-12W	34	07/08/77	02/10/77	WR	50-80 % S
192	CANMAR I (UKALERK)	2800	70-10-03N	132-44-00W	31	22/07/78	04/10/78	WR	0-50 % S
193	CANMAR II (KOPANOAR)	2800	70-23-54N	135-06-00W	64	07/08/77	01/10/77	WR	50-80 % S
193	CANMAR II (KOPANOAR)	2800	70-22-54N	135-05-36W	57	02/09/78	04/10/78	WR	50-80 % S
147	CAPE ENRAGE	1860	45-44-54N	064-36-24W	37	14/06/78	19/02/79	WR	50-80 % S
032	CAPE ROSEWAY	1860	43-31-18N	065-12-06W	37	11/06/70	29/10/70	WR	50-80 % S
032	CAPE ROSEWAY	1860	43-31-18N	065-12-06W	37	08/12/70	04/06/72	WR	50-80 % S
022	CAPE SPEAR	2100	47-31-33N	052-37-57W	59	08/04/76	27/04/76	WR	50-80 % S
042	CAPE TORMENTINE	1860	46-08-13N	063-46-23W	7	12/06/73	20/11/73	PC	50-80 % S
059	CAPE TORMENTINE	2000	46-10-00N	063-45-00W	17	09/07/76	17/11/76	WR	50-80 % S
058	CAPUCINS	2000	49-04-41N	066-48-54W	36	20/06/75	11/11/75	WR	50-80 % S
084	CHEDABUCTO BAY	1860	45-28-24N	061-10-30W	27	25/10/74	11/02/75	WR	50-80 % S
084	CHEDABUCTO BAY	1860	45-28-24N	061-10-30W	27	04/05/75	04/02/76	WR	50-80 % S
146	CHIGNECTO BAY	1860	45-41-28N	064-32-59W	11	14/06/78	06/08/78	WR	50-80 % S
146	CHIGNECTO BAY	1860	45-33-24N	064-49-18W	11	06/08/78	13/12/78	WR	50-80 % S
064	COBOURG	2950	43-49-05N	078-02-05W	69	12/04/72	04/12/72	WR	80-100% S
064	COBOURG	2950	43-53-15N	078-09-12W	69	29/03/73	12/12/73	WR	50-80 % S
159	CONCEPTION BAY	2100	48-00-00N	052-30-00W	176	20/10/81	22/10/81	WR	50-80 % S
072	COVE ISLAND	2950	45-19-24N	081-56-18W	65	26/05/73	17/11/73	WR	50-80 % S
027	CSS DAWSON (MINAS BASIN)	2000	45-17-25N	064-09-05W	18	30/06/75	01/12/75	WR	50-80 % S
027	CSS DAWSON (MINAS BASIN)	2000	45-17-25N	064-09-05W	18	13/04/76	23/11/76	WR	80-100% S
150	CSS DAWSON (EMERALD BASIN)	1860	43-55-24N	062-38-12W	190	16/11/79	21/11/79	WR	50-80 % S
021	DEADMANS BAY	2100	47-32-36N	052-39-30W	53	08/04/76	27/04/76	WR	50-80 % S
131	DISCOVERER 7-SEAS (BLUE H-28)	1800	49-37-34N	049-18-29W	1524	16/05/79	17/08/79	WR	80-100% S
080	EDDY POINT	1860	45-31-06N	061-14-05W	46	31/05/72	15/02/73	WR	50-80 % S
200	EXPLORER I	2800	70-31-07N	133-20-05W	46	03/08/79	10/09/79	WR	50-80 % S
200	EXPLORER I	2800	70-05-00N	136-40-00W	N/A	11/08/80	18/09/80	WR	50-80 % S

CANADIAN MARINE DATA INVENTORY REPORT

D. HISTORICAL WAVE MEASURING STATIONS

REFERENCE C81043D01

PAGE 02

TYPE : WR - WAVERIDER, PC - PRESSURE CELL, ST - STAFF GAUGE

ANALYSIS : S - SPECTRAL

IDENTIFICATION		LOCATION				DATES		INSTRUMENT	
ID.	NAME	IHB ZONE	LATITUDE DD-MM-SS	LONGITUDE DDD-MM-SS	DEPTH METRES	START DD/MM/YY	STOP DD/MM/YY	TYPE	SUCCESS-% ANALYSIS
201	EXPLORER II (TARSUIT)	2800	69-58-08N	136-36-09W	30	13/08/79	18/09/79	WR	80-100% S
201	EXPLORER II	2800	70-34-00N	134-35-00W	N/A	16/08/80	13/09/80	WR	50-80 % S
201	EXPLORER II (ISSUNGNAK)	2800	70-05-00N	134-26-00W	27	28/07/81	31/08/81	WR	50-80 % S
201	EXPLORER II (IRKALUK)	2800	70-35-00N	134-14-00W	58	28/07/82	21/08/82	WR	0-50 % S
201	EXPLORER II (AIVERK)	2800	70-26-30N	133-59-00W	60	02/09/82	29/09/82	WR	50-80 % S
196	EXPLORER III (KAGLULIK)	2800	70-34-06N	130-51-24W	27	31/08/78	01/09/78	WR	50-80 % S
196	EXPLORER III (KOAKOAK)	2800	70-28-00N	134-06-00W	60	07/08/81	06/10/81	WR	50-80 % S
196	EXPLORER III (NERLERK)	2800	70-24-48N	133-27-00W	52	27/07/82	25/08/82	WR	80-100% S
196	EXPLORER III (ORVILRUK)	2800	70-22-30N	136-32-00W	58	01/09/82	29/09/82	WR	50-80 % S
202	EXPLORER IV	2800	70-49-00N	130-18-00W	N/A	15/08/80	07/09/80	WR	50-80 % S
202	EXPLORER IV (KILANNAK)	2800	70-46-00N	129-21-00W	25	05/08/81	14/08/81	WR	50-80 % S
202	EXPLORER IV (KENALOOK)	2800	70-44-00N	133-50-00W	71	25/07/82	27/07/82	WR	80-100% S
124	FISHERMANS COVE (K)	2900	49-21-18N	123-16-28W	6	06/04/79	27/03/80	ST	80-100% S
123	FISHERMANS COVE (WB)	2900	49-21-00N	123-42-00W	50	11/04/79	27/03/80	WR	50-80 % S
045	FOX RIVER A	2000	49-00-19N	064-23-00W	8	15/05/74	10/07/74	WR	50-80 % S
045	FOX RIVER A	2000	49-00-18N	064-23-17W	18	15/05/75	10/11/75	WR	50-80 % S
045	FOX RIVER A	2000	49-00-19N	064-23-00W	9	19/07/78	05/12/78	WR	80-100% S
162	FOX RIVER A(K)	2000	48-59-45N	064-23-03W	4	30/06/78	05/12/78	ST	0-50 % S
046	FOX RIVER B	2000	48-59-08N	064-23-00W	5	24/05/74	18/09/74	PC	80-100% S
163	FOX RIVER B(K)	2000	48-59-43N	064-23-11W	3	04/07/78	20/09/78	ST	80-100% S
047	FOX RIVER C	2000	48-59-47N	064-23-17W	3	15/05/75	10/11/75	WR	50-80 % S
114	FRENCH CREEK (INNER)	2900	49-21-02N	124-21-15W	4	24/11/76	24/02/77	WR	50-80 % S
115	FRENCH CREEK (OUTER)	2900	49-21-02N	124-21-15W	7	24/11/76	15/03/77	WR	80-100% S
028	GABARUS BAY	1860	45-49-36N	060-04-48W	24	28/05/75	12/02/76	WR	80-100% S
028	GABARUS BAY	1860	45-49-36N	060-04-48W	24	29/04/76	13/01/77	WR	80-100% S
026	GABARUS BAY	1860	45-49-40N	060-03-40W	33	28/04/76	12/01/77	WR	50-80 % S
121	GIBSONS LANDING	2900	49-24-00N	123-30-00W	37	30/03/78	03/04/79	WR	50-80 % S
071	GIMLI	2960	50-38-55N	096-54-00W	9	15/09/71	07/11/71	WR	50-80 % S
071	GIMLI	2960	50-38-55N	096-54-00W	9	10/06/72	23/10/72	WR	50-80 % S
036	GLACE BAY	1860	46-13-30N	059-26-15W	46	02/12/70	11/01/71	WR	80-100% S
036	GLACE BAY	1860	46-08-00N	059-30-00W	46	23/04/71	04/10/71	WR	80-100% S
136	GLOMAR ATLANTIC (HIBERNIA P-15)	1851	46-46-20N	048-46-00W	82	01/06/79	21/10/79	WR	80-100% S
136	GLOMAR ATLANTIC (SOUTH LABRADOR N-79)	2100	55-48-50N	058-26-37W	490	31/07/80	25/09/80	WR	50-80 % S
067	GODERICH (INNER)	2950	43-44-42N	081-43-21W	7	14/08/72	07/12/72	PC	80-100% S
068	GODERICH (OUTER)	2950	43-44-46N	081-43-49W	7	14/08/72	07/12/72	PC	80-100% S
069	GODERICH (WB)	2950	43-44-49N	081-44-27W	8	02/09/72	07/12/72	WR	50-80 % S
009	GRAND BAY (INNER)	2000	47-34-36N	059-12-36W	14	05/10/74	17/12/74	WR	50-80 % S
010	GRAND BAY (OUTER)	2000	47-35-00N	059-17-40W	91	27/04/74	17/12/74	WR	50-80 % S
070	GRAND BEACH	2960	50-38-55N	096-38-30W	9	22/06/71	10/11/71	WR	50-80 % S
070	GRAND BEACH	2960	50-38-55N	096-38-30W	9	18/05/72	23/10/72	WR	80-100% S
070	GRAND BEACH	2960	50-38-55N	096-38-30W	9	22/05/73	05/06/73	WR	80-100% S
190	GULF I	2800	70-03-30N	133-38-00W	33	15/08/77	13/10/77	WR	50-80 % S
191	GULF II	2800	70-08-24N	136-24-48W	43	16/08/77	10/10/77	WR	50-80 % S
144	GULF TIDE (THEBAUD I-94)	1800	43-44-00N	060-20-30W	60	09/03/78	06/11/78	WR	80-100% S
144	GULF TIDE (VENTURE D-23)	1800	43-47-30N	059-37-00W	60	06/11/78	10/06/79	WR	0-50 % S

CANADIAN MARINE DATA INVENTORY REPORT

D. HISTORICAL WAVE MEASURING STATIONS

REFERENCE C81043001

PAGE 03

TYPE : WR - WAVERIDER, PC - PRESSURE CELL, ST - STAFF GAUGE

ANALYSIS : S - SPECTRAL

IDENTIFICATION		LOCATION				DATES		INSTRUMENT	
ID.	NAME	IHB ZONE	LATITUDE DD-MM-SS	LONGITUDE DDD-MM-SS	DEPTH METRES	START DD/MM/YY	STOP DD/MM/YY	TYPE	SUCCESS-% ANALYSIS
002	GUYANA	1850	07-24-28N	058-18-00W	14	22/02/74	19/03/74	WR	50-80 % S
097	HALIBUT BANK	2900	49-20-36N	123-44-06W	53	11/01/74	16/05/74	WR	80-100% S
129	HARBOUR GRACE	2100	47-41-21N	053-12-44W	17	11/06/78	24/07/78	WR	50-80 % S
129	HARBOUR GRACE	2100	47-40-39N	053-14-09W	10	24/07/78	16/02/79	WR	80-100% S
094	HAVDRILL (BONAVISTA C-99)	2100	49-08-06N	051-14-27W	335	09/07/74	03/10/74	WR	50-80 % S
094	HAVORILL (BONAVISTA C-99)	2100	49-08-00N	051-14-00W	335	11/06/75	11/08/75	WR	80-100% S
094	HAVDRILL (INDIAN HARBOUR M-52)	2100	54-21-51N	054-23-49W	196	17/08/75	21/10/75	WR	50-80 % S
089	HAY RIVER	2960	60-57-24N	115-42-45W	18	18/06/75	30/09/75	WR	80-100% S
098	HERSCHEL ISLAND	2800	69-00-00N	139-00-00W	N/A	01/08/70	30/08/70	WR	0-50 % S
194	ISSERK	2800	69-57-30N	134-26-00W	14	11/08/77	16/09/77	WR	0-50 % S
198	ISSUNGNAK	2800	70-04-00N	132-27-00W	24	04/08/78	13/08/78	WR	50-80 % S
198	ISSUNGNAK	2800	70-03-20N	133-59-36W	24	19/08/79	15/10/79	WR	50-80 % S
205	ITIYOK ISLAND (ESSO)	2800	69-56-58N	134-29-40W	14	03/08/82	26/09/82	WR	50-80 % S
063	KINCARDINE (INNER)	2950	44-10-36N	081-38-24W	3	07/10/73	18/12/73	PC	50-80 % S
062	KINCARDINE (OUTER)	2950	44-10-48N	081-38-48W	6	20/10/73	18/12/73	PC	50-80 % S
113	KINCOLITH	2900	54-59-51N	129-58-48W	37	06/10/77	26/02/78	WR	80-100% S
074	KINGSTON	2950	44-06-20N	076-34-58W	30	25/07/73	30/11/73	WR	80-100% S
074	KINGSTON	2950	44-06-03N	076-35-04W	29	27/06/75	08/08/75	WR	50-80 % S
074	KINGSTON	2950	44-06-03N	076-35-04W	29	09/06/76	08/09/76	WR	50-80 % S
118	KITIMAT	2900	53-58-52N	128-39-12W	37	08/10/77	22/03/78	WR	80-100% S
160	LAMEQUE (K)	2000	47-46-15N	064-39-36W	4	29/09/81	21/12/81	ST	0-50 % S
057	LES ESCOUMINS	2000	48-12-06N	069-18-55W	91	29/04/74	30/09/74	WR	80-100% S
057	LES ESCOUMINS	2000	48-13-39N	069-16-18W	91	01/10/74	07/11/74	WR	50-80 % S
016	LOGY BAY	2100	47-38-18N	052-28-18W	168	01/08/72	14/12/72	WR	50-80 % S
016	LOGY BAY	2100	47-38-12N	052-27-48W	168	22/06/73	20/01/74	WR	50-80 % S
016	LOGY BAY	2100	47-38-12N	052-27-48W	168	25/06/74	22/01/75	WR	50-80 % S
016	LOGY BAY	2100	47-38-12N	052-27-48W	168	06/06/75	13/01/76	WR	50-80 % S
016	LOGY BAY	2100	47-36-06N	052-26-40W	167	18/06/76	31/01/77	WR	50-80 % S
016	LOGY BAY	2100	47-36-06N	052-26-40W	167	09/06/77	09/01/78	WR	50-80 % S
016	LOGY BAY	2100	47-37-00N	052-25-27W	166	16/06/79	13/02/80	WR	80-100% S
016	LOGY BAY	2100	47-37-00N	052-25-27W	166	18/05/80	31/12/80	WR	50-80 % S
016	LOGY BAY	2100	47-37-00N	052-25-27W	162	01/01/81	04/03/82	WR	80-100% S
016	LOGY BAY	2100	47-37-00N	052-25-27W	162	07/06/82	28/01/83	WR	50-80 % S
117	LUND	2900	49-58-52N	124-45-58W	37	12/10/77	25/03/78	WR	80-100% S
148	LUNENBERG (K)	1860	44-22-30N	064-18-30W	6	14/12/78	06/11/79	ST	80-100% S
149	LUNENBERG (WB)	1860	44-21-06N	064-17-36W	12	14/12/78	27/11/79	WR	50-80 % S
015	M V TYPHOON (LEIF M-48)	2100	54-17-00N	055-07-00W	30	21/07/71	02/09/71	WR	50-80 % S
164	MAGDALEN ISLANDS	2000	47-20-00N	061-46-48W	14	29/05/81	02/09/81	WR	50-80 % S
164	MAGDALEN ISLANDS	2000	47-28-12N	061-37-48W	18	19/05/82	26/08/82	WR	50-80 % S
048	MAGDALEN (INNER)	2000	47-38-01N	061-31-10W	13	28/06/76	19/11/76	WR	50-80 % S
048	MAGDALEN (INNER)	2000	47-38-12N	061-31-02W	13	02/07/77	29/11/77	WR	50-80 % S
048	MAGDALEN (INNER)	2000	47-38-06N	061-31-00W	13	16/07/78	07/12/78	WR	80-100% S
043	MAGDALEN (OUTER)	2000	47-36-06N	061-18-04W	27	23/05/74	17/12/74	WR	80-100% S
043	MAGDALEN (OUTER)	2000	47-36-06N	061-18-04W	27	26/06/75	14/12/75	WR	50-80 % S
043	MAGDALEN (OUTER)	2000	47-36-06N	061-18-04W	27	28/06/76	19/11/76	WR	50-80 % S

CANADIAN MARINE DATA INVENTORY REPORT

D. HISTORICAL WAVE MEASURING STATIONS

REFERENCE C81043D01

PAGE 04

TYPE : WR - WAVERIDER, PC - PRESSURE CELL, ST - STAFF GAUGE

ANALYSIS : S - SPECTRAL

IDENTIFICATION		LOCATION				DATES		INSTRUMENT	
ID.	NAME	IHB ZONE	LATITUDE DD-MM-SS	LONGITUDE DDD-MM-SS	DEPTH METRES	START DD/MM/YY	STOP DD/MM/YY	TYPE	SUCCESS-% ANALYSIS
043	MAGDALEN (OUTER)	2000	47-36-06N	061-18-04W	27	02/07/77	21/07/77	WR	50-80 % S
043	MAGDALEN (OUTER)	2000	47-37-18N	061-18-18W	15	14/07/78	08/12/78	WR	80-100% S
060	MAIN DUCK ISLAND	2950	43-47-45N	076-49-39W	69	19/04/72	21/11/72	WR	80-100% S
054	MATANE	2000	48-50-31N	067-34-45W	7	26/07/72	23/10/72	ST	0-50 % S
206	MCINLEY BAY	2800	69-58-06N	131-12-39W	8	07/08/82	06/10/82	WR	50-80 % S
085	MELFORD POINT	1860	45-32-15N	061-17-43W	29	10/12/74	08/02/75	WR	0-50 % S
085	MELFORD POINT	1860	45-32-15N	061-17-43W	29	11/04/75	04/02/76	WR	80-100% S
044	MISCOU ISLAND	2000	48-10-30N	064-16-00W	46	30/05/74	21/11/74	WR	80-100% S
135	NEDDRILL II (ROBERVAL C-02)	2100	54-51-37N	054-44-41W	273	06/07/80	03/09/80	WR	50-80 % S
135	NEDDRILL II (BJARNI O-82)	2100	55-31-35N	057-40-38W	156	16/09/80	17/10/80	WR	50-80 % S
135	NEDDRILL II (CORTE REAL P-85)	2100	56-05-20N	058-12-12W	438	16/07/82	31/07/82	WR	50-80 % S
135	NEDDRILL II (CORTE REAL P-85)	2100	56-05-37N	058-12-08W	445	23/08/82	12/09/82	WR	50-80 % S
135	NEDDRILL II (CORTE REAL P-85)	2100	56-05-22N	058-11-31W	445	30/09/82	14/10/82	WR	80-100% S
155	NEDDRILL II-B (ROBERVAL C-02)	2100	54-52-30N	055-45-06W	285	22/08/80	08/09/80	WR	50-80 % S
156	OCEAN RANGER (HIBERNIA G-55)	1851	46-43-36N	048-53-30W	80	04/12/80	23/02/81	WR	50-80 % S
156	OCEAN RANGER (HIBERNIA K-18)	1851	46-47-58N	048-47-58W	80	02/03/81	05/06/81	WR	50-80 % S
156	OCEAN RANGER (SHERIDAN J-87)	1851	48-26-50N	049-57-58W	209	25/06/81	04/11/81	WR	50-80 % S
156	OCEAN RANGER (HIBERNIA J-34)	1851	46-43-57N	048-50-43W	78	13/12/81	09/02/82	WR	50-80 % S
037	OSBORNE HEAD	1860	44-32-40N	063-27-50W	30	12/12/70	29/12/70	WR	50-80 % S
037	OSBORNE HEAD	1860	44-32-40N	063-27-50W	30	06/03/71	15/02/73	WR	80-100% S
037	OSBORNE HEAD	1860	44-32-49N	063-27-32W	30	27/02/73	28/01/75	WR	80-100% S
037	OSBORNE HEAD	1860	44-32-49N	063-27-32W	30	03/03/75	01/09/76	WR	80-100% S
037	OSBORNE HEAD	1860	44-29-25N	063-24-15W	57	01/09/76	31/12/80	WR	80-100% S
037	OSBORNE HEAD	1860	44-29-25N	063-24-15W	57	01/01/81	31/12/81	WR	80-100% S
154	PACNORSE I (RUT H-11)	2100	59-10-18N	062-16-47W	137	27/07/81	31/08/81	WR	50-80 % S
154	PACNORSE I (RUT H-II)	2100	59-10-30N	062-17-45W	124	06/08/82	11/10/82	WR	50-80 % S
083	PARKER POINT	1860	45-21-21N	061-19-40W	37	30/11/73	16/01/74	WR	50-80 % S
083	PARKER POINT	1860	45-21-21N	061-19-40W	37	06/06/74	10/12/74	WR	80-100% S
137	PELERIN (SKOLP E-07)	2100	58-26-00N	061-46-00W	75	20/08/78	17/09/78	WR	50-80 % S
137	PELERIN (ROBERVAL K-92)	2100	55-00-00N	055-30-00W	269	16/07/79	01/10/79	WR	50-80 % S
137	PELERIN (OGMUND E-72)	2100	57-31-30N	060-26-36W	159	16/08/80	08/10/80	WR	50-80 % S
137	PELERIN (NORTH LEIF I-05)	2100	54-25-00N	055-15-00W	146	08/07/81	28/09/81	WR	50-80 % S
137	PELERIN (POTHURST P-19)	2100	58-48-54N	060-31-30W	192	11/07/82	20/10/82	WR	50-80 % S
017	PELICAN (LEIF M-48)	2100	54-17-46N	055-07-20W	165	31/07/73	29/08/73	WR	50-80 % S
017	PELICAN (BJARNI H-81)	2100	55-30-00N	057-42-00W	139	31/08/73	25/10/73	WR	50-80 % S
017	PELICAN (GUDRID H-55)	2100	54-54-00N	055-52-00W	300	19/08/74	01/09/74	WR	50-80 % S
017	PELICAN (BJARNI H-81)	2100	55-30-44N	057-45-00W	139	30/09/74	17/10/74	WR	50-80 % S
017	PELICAN (FREYDIS B-87)	2100	53-56-13N	054-42-35W	188	05/07/75	05/08/75	WR	50-80 % S
017	PELICAN (KARLSEFNI A-13)	2100	58-52-00N	061-46-00W	180	11/08/75	23/09/75	WR	50-80 % S
017	PELICAN (CARTIER O-70)	2100	54-39-00N	055-40-00W	310	27/09/75	29/10/75	WR	50-80 % S
017	PELICAN (SNORRI J-90)	2100	57-20-00N	059-58-00W	141	29/08/76	07/09/76	WR	50-80 % S
017	PELICAN (KARLSEFNI A-13)	2100	58-52-00N	061-47-00W	180	13/09/76	23/10/76	WR	50-80 % S
017	PELICAN (TYRK P-100)	2100	55-30-00N	058-14-00W	137	27/07/79	25/08/79	WR	80-100% S
017	PELICAN (GILBERT F-53)	2100	58-52-06N	062-06-20W	183	14/09/79	08/10/79	WR	50-80 % S
017	PELICAN (GILBERT F-53)	2100	58-52-06N	062-06-20W	198	18/07/80	11/09/80	WR	50-80 % S

CANADIAN MARINE DATA INVENTORY REPORT

D. HISTORICAL WAVE MEASURING STATIONS

REFERENCE C81043D01

PAGE 05

TYPE : WR - WAVERIDER, PC - PRESSURE CELL, ST - STAFF GAUGE

ANALYSIS : S - SPECTRAL

IDENTIFICATION		LOCATION				DATES		INSTRUMENT	
ID.	NAME	IHB ZONE	LATITUDE DD-MM-SS	LONGITUDE DDD-MM-SS	DEPTH METRES	START DD/MM/YY	STOP DD/MM/YY	TYPE	SUCCESS-% ANALYSIS
023	PETREL (CABOT G-91)	2100	59-50-00N	061-45-00W	91	01/08/76	28/08/76	WR	80-100% S
023	PETREL (VERRAZANO L-77)	2100	52-26-05N	054-12-00W	107	03/09/76	22/09/76	WR	50-80 % S
023	PETREL (BJARNI O-82)	2100	55-31-47N	057-42-34W	144	30/07/79	20/10/79	WR	50-80 % S
023	PETREL (RALEIGH N-18)	2200	62-17-53N	062-32-51W	357	13/09/82	02/10/82	WR	50-80 % S
122	POINT GREY	2900	49-17-03N	123-16-22W	11	05/07/78	12/08/78	WR	50-80 % S
122	POINT GREY	2900	49-16-42N	123-16-00W	5	22/08/78	30/07/79	WR	80-100% S
029	POINT LEPREAU	1860	44-57-00N	066-27-00W	91	21/05/75	01/06/76	WR	80-100% S
076	POINT PELEE EAST	2950	41-57-00N	082-24-00W	16	10/05/74	11/12/74	WR	50-80 % S
066	POINT PELEE SOUTH	2950	41-55-16N	082-15-24W	18	03/04/72	30/06/72	WR	80-100% S
066	POINT PELEE SOUTH	2950	41-55-16N	082-15-24W	18	02/09/72	13/11/72	WR	0-50 % S
066	POINT PELEE SOUTH	2950	41-55-16N	082-15-24W	18	31/03/73	29/12/73	WR	80-100% S
075	POINT PELEE WEST	2950	41-57-00N	082-35-00W	12	22/05/74	06/01/75	WR	80-100% S
152	POINTE SAPIN	2000	46-59-42N	064-41-00W	20	05/06/79	04/12/79	WR	80-100% S
152	POINTE SAPIN	2000	46-59-42N	064-41-00W	20	07/05/80	12/08/80	WR	50-80 % S
152	POINTE SAPIN	2000	46-59-42N	064-39-00W	20	14/08/82	18/11/82	WR	80-100% S
008	PORT AUX BASQUES	2000	47-33-00N	059-06-00W	44	05/12/74	07/02/75	WR	80-100% S
174	PORT ELGIN (K)	2950	44-26-45N	081-24-50W	2	18/05/77	27/11/77	ST	50-80 % S
175	PORT ELGIN (WB)	2950	44-27-00N	081-25-00W	11	18/05/77	29/11/77	WR	50-80 % S
182	PORT HOPE	2950	43-53-59N	078-17-30W	30	08/05/82	17/11/82	WR	0-50 % S
126	PORT SIMPSON	2900	54-35-18N	130-25-34W	37	01/05/81	02/03/82	WR	80-100% S
111	POWELL RIVER (INNER)	2900	49-50-18N	124-31-50W	6	10/12/76	14/03/77	WR	50-80 % S
112	POWELL RIVER (OUTER)	2900	49-50-18N	124-31-50W	9	10/12/76	14/03/77	WR	50-80 % S
104	PRINCE RUPERT	2900	54-11-09N	130-30-06W	91	28/09/72	13/06/73	WR	80-100% S
088	PRINCE RUPERT	2900	54-14-12N	130-20-17W	27	19/04/76	23/07/76	WR	50-80 % S
025	PULLEN ISLAND	2800	69-58-05N	134-59-00W	15	08/08/76	09/10/76	WR	80-100% S
050	PULLEN ISLAND	2800	69-57-05N	133-50-05W	15	08/08/76	08/10/76	WR	80-100% S
100	QUADRA/VANCOUVER (OWS PAPA)	3600	50-00-00N	145-00-00W	4000	02/02/74	11/02/74	PC	0-50 % S
100	QUADRA/VANCOUVER (OWS PAPA)	3600	50-00-00N	145-00-00W	4000	13/01/75	12/09/76	PC	80-100% S
100	QUADRA/VANCOUVER (OWS PAPA)	3600	50-00-00N	145-00-00W	4000	01/11/76	12/05/81	PC	80-100% S
001	QUADRA/VANCOUVER (OWS PAPA (WB))	3600	50-00-00N	145-00-00W	4000	31/01/74	11/02/74	WR	50-80 % S
001	QUADRA/VANCOUVER (OWS PAPA (WB))	3600	50-00-00N	145-00-00W	4000	04/04/75	08/05/75	WR	0-50 % S
001	QUADRA/VANCOUVER (OWS PAPA (WB))	3600	50-00-00N	145-00-00W	4000	24/10/78	03/12/78	WR	80-100% S
001	QUADRA/VANCOUVER (OWS PAPA (WB))	3600	50-00-00N	145-00-00W	4000	07/11/80	18/11/80	WR	80-100% S
053	RIMOUSKI	2000	48-31-15N	068-28-25W	7	13/08/71	24/11/71	ST	80-100% S
108	ROBERTS BANK	2900	49-01-05N	123-16-07W	139	07/02/74	01/11/74	WR	0-50 % S
108	ROBERTS BANK	2900	49-01-05N	123-16-07W	139	23/04/75	03/04/76	WR	50-80 % S
108	ROBERTS BANK	2900	49-04-18N	123-22-48W	250	25/06/81	29/06/81	WR	50-80 % S
151	ROLLS COVE	1800	47-34-00N	052-41-10W	18	20/09/80	18/09/81	WR	50-80 % S
142	ROWAN JUNEAU (VENTURE B-13)	1860	44-01-44N	059-32-08W	24	22/08/80	25/01/81	WR	80-100% S
142	ROWAN JUNEAU (VENTURE B-43)	1860	43-51-36N	059-27-24W	56	31/01/81	24/10/81	WR	80-100% S
142	ROWAN JUNEAU (VENTURE B-43)	1860	43-53-00N	059-29-42W	50	25/10/81	28/04/82	WR	80-100% S
142	ROWAN JUNEAU (SOUTH VENTURE O-59)	1860	43-52-36N	059-29-12W	50	29/04/82	03/01/83	WR	50-80 % S
153	SALENERGY IV (EAST POINT E-47)	2000	46-36-15N	061-37-30W	64	12/06/80	29/07/80	WR	50-80 % S
153	SALENERGY IV (BEATON POINT F-70)	2000	46-39-20N	061-54-45W	56	01/08/80	26/08/80	WR	80-100% S
143	SAULNIERVILLE	1860	44-15-20N	066-10-00W	9	27/05/77	03/06/77	WR	50-80 % S

CANADIAN MARINE DATA INVENTORY REPORT

D. HISTORICAL WAVE MEASURING STATIONS

REFERENCE C81043D01

PAGE 06

TYPE : WR - WAVERIDER, PC - PRESSURE CELL, ST - STAFF GAUGE

ANALYSIS : S - SPECTRAL

IDENTIFICATION		LOCATION				DATES		INSTRUMENT	
ID.	NAME	IHB ZONE	LATITUDE DD-MM-SS	LONGITUDE DDD-MM-SS	DEPTH METRES	START DD/MM/YY	STOP DD/MM/YY	SUCCESS-% TYPE ANALYSIS	
143	SAULNIERVILLE	1860	44-15-50N	066-08-45W	7	03/06/77	11/11/77	WR 50-80 %	S
143	SAULNIERVILLE	1860	44-15-20N	066-10-00W	9	12/11/77	22/03/79	WR 80-100%	S
091	SEDCO H (CAP ROUGE F-52)	2000	47-11-10N	061-11-10W	61	13/06/73	03/09/73	WR 50-80 %	S
091	SEDCO H (BRADELLE L-49)	2000	47-58-33N	063-07-06W	58	12/09/73	22/11/73	WR 50-80 %	S
091	SEDCO H (EMERILLON C-56)	1851	45-15-03N	054-23-14W	120	06/12/73	22/01/74	WR 50-80 %	S
091	SEDCO H (QJIBWA E-07)	1860	43-46-15N	061-46-13W	79	04/02/74	27/02/74	WR 50-80 %	S
091	SEDCO H (DEMASCOTA G-32)	1860	43-41-25N	060-49-51W	53	04/03/74	19/05/74	WR 50-80 %	S
091	SEDCO H (SAMBRO I-29)	1860	43-38-17N	062-48-15W	199	27/05/74	27/06/74	WR 50-80 %	S
091	SEDCO H (JASON C-20)	1860	45-29-19N	058-32-18W	110	04/07/74	30/07/74	WR 50-80 %	S
091	SEDCO H (NORTH SYDNEY P-05)	1860	46-34-45N	059-45-00W	100	16/08/74	03/09/74	WR 50-80 %	S
091	SEDCO H (MONTAGNAIS I-94)	1860	42-53-41N	064-13-47W	113	15/09/74	28/09/74	WR 50-80 %	S
091	SEDCO H (NORTH SYDNEY F-24)	1860	46-33-23N	059-48-46W	60	16/06/76	10/07/76	WR 50-80 %	S
091	SEDCO H (PENOBSCOT L-30)	1860	44-09-44N	060-04-09W	138	26/07/76	22/09/76	WR 80-100%	S
091	SEDCO H (WENONAH J-75)	1860	43-34-26N	060-25-45W	67	01/10/76	15/11/76	WR 0-50 %	S
091	SEDCO H (MOHEIDA P-15)	1860	43-04-55N	062-16-43W	110	14/01/77	11/02/77	WR 50-80 %	S
091	SEDCO H (PENOBSCOT B-41)	1860	44-10-02N	060-06-32W	61	24/02/77	29/03/77	WR 50-80 %	S
093	SEDCO I (EGRET K-36)	1851	46-25-38N	048-50-22W	86	16/08/73	10/09/73	WR 80-100%	S
093	SEDCO I (SPOONBILL D-30)	1851	45-49-06N	049-04-06W	64	13/09/73	14/10/73	WR 80-100%	S
093	SEDCO I (BRANT P-87)	1851	44-16-59N	052-42-19W	86	02/12/73	10/12/73	WR 50-80 %	S
093	SEDCO I (COOT K-56)	1851	45-45-41N	052-08-32W	86	20/02/74	21/02/74	WR 50-80 %	S
093	SEDCO I (CAREY J-34)	1851	45-23-32N	052-35-02W	86	28/04/74	04/07/74	WR 0-50 %	S
093	SEDCO I (SKUA E-41)	1851	45-20-27N	048-52-26W	85	10/09/74	29/09/74	WR 50-80 %	S
090	SEDCO J (FLYING FOAM I-13)	1850	47-02-42N	048-46-31W	91	12/10/73	26/11/73	WR 50-80 %	S
090	SEDCO J (BONNITION H-32)	1851	45-51-27N	048-19-32W	108	08/12/73	30/12/73	WR 50-80 %	S
090	SEDCO J (CITNALTA I-59)	1860	44-08-42N	059-37-30W	59	25/02/74	19/04/74	WR 50-80 %	S
090	SEDCO J (INTREPID L-80)	1860	43-49-37N	059-56-44W	37	14/06/74	11/08/74	WR 50-80 %	S
090	SEDCO J (ADOLPHUS D-50)	1851	46-59-05N	048-22-29W	113	26/10/74	31/10/74	WR 50-80 %	S
090	SEDCO J (ADVENTURE F-80)	1860	45-19-30N	057-56-30W	99	22/01/75	01/02/75	WR 50-80 %	S
090	SEDCO J (CUMBERLAND B-55)	1800	48-24-12N	050-07-58W	195	08/08/75	13/10/75	WR 50-80 %	S
090	SEDCO J (INDIAN HARBOR M-52)	2100	54-22-00N	054-24-00W	198	27/09/76	12/10/76	WR 50-80 %	S
018	SEDCO 445 (SNORRI J-90)	2100	57-19-45N	059-57-44W	141	01/08/75	09/10/75	WR 50-80 %	S
134	SEDCO 706 (HIBERNIA B-08)	1851	46-47-05N	048-45-26W	110	22/03/80	06/01/81	WR 50-80 %	S
134	SEDCO 706 (HEBRON I-13)	1851	46-32-48N	048-32-23W	94	29/01/81	25/05/81	WR 80-100%	S
134	SEDCO 706 (HEBRON I-13)	1851	46-32-20N	048-31-35W	70	22/07/81	10/09/81	WR 50-80 %	S
134	SEDCO 706 (NAUTILUS C-92)	1800	46-51-21N	048-44-55W	90	22/10/81	14/07/82	WR 80-100%	S
134	SEDCO 706 (LINNET E-63)	1800	48-12-48N	050-25-50W	157	23/07/82	06/11/82	WR 80-100%	S
132	SEDCO 707 (HARE BAY E-21)	2100	51-10-23N	051-04-30W	241	12/06/79	18/10/79	WR 50-80 %	S
133	SEDCO 709 (HIBERNIA O-35)	1851	46-44-21N	048-49-00W	72	07/01/80	11/07/80	WR 80-100%	S
133	SEDCO 709 (SHUBENACADIE H-100)	1800	42-53-18N	061-30-48W	1114	19/11/82	23/12/82	WR 80-100%	S
092	SEDNETH (OSPNEY H-84)	1851	44-43-29N	049-27-33W	59	27/07/73	30/08/73	WR 80-100%	S
051	SEPT ILES	2000	50-11-53N	066-23-03W	8	12/06/72	08/12/72	PC 80-100%	S
161	ST FABIE	2000	48-23-48N	068-57-39W	28	31/05/77	30/07/77	WR 80-100%	S
052	STE ANNE DES MONTS	2000	49-09-15N	066-30-00W	61	07/07/71	29/11/71	WR 50-80 %	S
052	STE ANNE DES MONTS	2000	49-09-15N	066-30-00W	61	09/06/72	22/11/72	WR 80-100%	S
020	STIEPHENVILLE	2000	48-29-24N	058-42-00W	28	07/10/74	29/10/74	WR 50-80 %	S

CANADIAN MARINE DATA INVENTORY REPORT

D. HISTORICAL WAVE MEASURING STATIONS

REFERENCE C81043D01

PAGE 07

TYPE : WR - WAVERIDER, PC - PRESSURE CELL, ST - STAFF GAUGE

ANALYSIS : S - SPECTRAL

IDENTIFICATION		LOCATION				DATES		INSTRUMENT	
ID.	NAME	IHB ZONE	LATITUDE DD-MM-SS	LONGITUDE DDD-MM-SS	DEPTH METRES	START DD/MM/YY	STOP DD/MM/YY	SUCCESS-% TYPE ANALYSIS	
020	STEPHENVILLE	2000	48-29-24N	058-42-00W	28	06/12/74	19/01/75	WR 50-80 %	S
020	STEPHENVILLE	2000	48-29-24N	058-42-00W	28	30/05/75	26/11/75	WR 50-80 %	S
158	STRAIT OF BELLE ISLE	2000	51-22-27N	056-49-55W	101	12/06/81	28/10/81	WR 80-100%	S
102	STURGEON BANK	2900	49-10-12N	123-18-46W	110	07/02/74	15/08/74	WR 80-100%	S
102	STURGEON BANK	2900	49-10-12N	123-18-46W	110	18/11/74	01/04/76	WR 80-100%	S
204	TARSUIT ISLAND	2800	69-53-00N	136-11-00W	20	13/08/81	15/08/81	WR 50-80 %	S
204	TARSUIT ISLAND	2800	69-53-24N	135-59-30W	20	30/07/82	20/08/82	WR 80-100%	S
204	TARSUIT ISLAND (KIGGAVIK)	2800	69-50-42N	136-00-00W	21	01/09/82	29/09/82	WR 50-80 %	S
040	TINER POINT	1900	45-08-54N	066-11-42W	31	14/02/72	22/09/72	WR 80-100%	S
040	TINER POINT	1900	45-09-15N	066-10-46W	31	24/09/72	22/03/73	WR 50-80 %	S
040	TINER POINT	1900	45-08-33N	066-12-23W	14	26/01/77	22/05/78	WR 50-80 %	S
056	TINER POINT	2000	45-09-12N	066-12-12W	8	21/04/77	12/06/78	ST 50-80 %	S
103	TOFINO	2900	48-59-27N	125-44-39W	40	26/06/70	27/09/70	WR 0-50 %	S
103	TOFINO	2900	48-59-27N	125-44-39W	40	02/04/71	21/05/71	WR 80-100%	S
103	TOFINO	2900	48-59-27N	125-44-39W	40	07/07/71	20/12/71	WR 80-100%	S
103	TOFINO	2900	48-59-27N	125-44-39W	40	02/02/72	12/07/72	WR 0-50 %	S
103	TOFINO	2900	48-59-27N	125-44-39W	40	02/02/73	23/06/73	WR 80-100%	S
103	TOFINO	2900	48-59-27N	125-44-39W	40	02/09/73	31/12/80	WR 80-100%	S
103	TOFINO	2900	48-59-27N	125-44-39W	40	01/01/81	31/12/81	WR 50-80 %	S
103	TOFINO	2900	48-59-27N	125-44-39W	40	01/01/82	31/12/82	WR 50-80 %	S
065	TORONTO	2950	43-30-23N	079-19-42W	108	11/03/72	15/04/73	WR 80-100%	S
003	TUKTOYAKTUK	2800	69-53-48N	135-57-12W	21	26/08/74	30/08/74	WR 80-100%	S
003	TUKTOYAKTUK	2800	69-53-48N	135-57-12W	21	08/08/75	06/09/75	WR 80-100%	S
004	VICTORIA HARBOUR	3600	48-25-25N	123-23-16W	5	10/03/76	24/03/77	WR 50-80 %	S
095	VICTORIA (K)	2900	48-25-41N	123-23-27W	4	03/12/75	12/04/76	ST 50-80 %	S
095	VICTORIA (K)	2900	48-25-41N	123-23-27W	4	09/07/76	28/07/76	ST 80-100%	S
167	VINLAND (WEST ESPERANTO B-78)	1860	44-47-12N	058-25-24W	92	21/09/82	24/12/82	WR 50-80 %	S
167	VINLAND (WEST ESPERANTO B-78)	1860	44-47-03N	058-26-11W	100	16/01/83	01/05/83	WR 50-80 %	S
106	WEST VANCOUVER	2900	49-20-44N	123-13-45W	40	19/12/72	18/05/74	WR 50-80 %	S
031	WESTERN HEAD	1860	44-00-42N	064-36-12W	40	27/04/70	04/07/71	WR 80-100%	S
031	WESTERN HEAD	1860	44-00-49N	064-36-10W	43	03/09/71	04/05/72	WR 50-80 %	S
031	WESTERN HEAD	1860	44-00-49N	064-36-10W	43	18/08/72	05/05/73	WR 50-80 %	S
081	WHEATLEY (K)	2950	42-03-39N	082-27-47W	6	15/04/79	04/01/80	ST 50-80 %	S
081	WHEATLEY (K)	2950	42-03-39N	082-27-47W	6	18/04/80	19/12/80	ST 50-80 %	S
079	WHEATLEY (WB)	2950	42-02-00N	082-27-00W	13	11/04/79	26/12/79	WR 50-80 %	S
079	WHEATLEY (WB)	2950	42-02-00N	082-27-00W	13	17/04/80	17/12/80	WR 50-80 %	S
116	WHITE ROCK	2900	49-00-30N	122-50-00W	13	24/10/77	03/03/78	WR 80-100%	S
165	ZAPATA SCOTIAN (OLYMPIA A-12)	1800	44-04-30N	059-48-30W	55	27/04/82	18/08/82	WR 80-100%	S
165	ZAPATA SCOTIAN (OLYMPIA A-12)	1800	44-04-30N	059-48-00W	55	24/08/82	13/10/82	WR 50-80 %	S
165	ZAPATA SCOTIAN (OLYMPIA A-12)	1800	44-00-43N	059-47-18W	37	15/10/82	23/10/82	WR 50-80 %	S
165	ZAPATA SCOTIAN (OLYMPIA A-12)	1800	44-00-30N	059-47-18W	37	03/11/82	10/01/83	WR 50-80 %	S
024	ZAPATA UGLAND (HERJOLF M-92)	2100	55-31-00N	057-45-00W	73	30/08/76	20/11/76	WR 50-80 %	S
140	ZAPATA UGLAND (HIBERNIA P-15)	1851	46-46-20N	048-46-00W	82	25/11/79	07/01/80	WR 0-50 %	S
140	ZAPATA UGLAND (BEN NEVIS I-45)	1851	46-34-36N	048-21-15W	98	31/01/80	30/08/80	WR 50-80 %	S
140	ZAPATA UGLAND (SOUTH TEMPEST G-88)	1800	47-07-55N	047-58-12W	150	30/09/80	02/04/81	WR 50-80 %	S

CANADIAN MARINE DATA INVENTORY REPORT

D. HISTORICAL WAVE MEASURING STATIONS

REFERENCE C81043D01

PAGE 08

TYPE : WR - WAVERIDER, PC - PRESSURE CELL, ST - STAFF GAUGE

ANALYSIS : S - SPECTRAL

IDENTIFICATION -----		LOCATION -----				DATES -----		INSTRUMENT -----	
ID.	NAME	IHB ZONE	LATITUDE DD-MM-SS	LONGITUDE DDD-MM-SS	DEPTH METRES	START DD/MM/YY	STOP DD/MM/YY	SUCCESS-% TYPE ANALYSIS	
140	ZAPATA UGLAND (HIBERNIA K-18)	1851	46-48-23N	048-47-35W	70	26/06/81	03/11/81	WR 50-80 %	S
140	ZAPATA UGLAND (WEST FLYING FOAM L-23)	1800	47-03-12N	048-44-48W	95	15/11/81	19/02/82	WR 50-80 %	S
140	ZAPATA UGLAND (BONANZA M-71)	1800	47-30-47N	048-12-40W	195	20/05/82	16/09/82	WR 50-80 %	S
140	ZAPATA UGLAND (BONANZA M-71)	1800	47-30-40N	048-12-23W	201	16/10/82	11/12/82	WR 0-50 %	S

APPENDIX D

TERMS OF REFERENCE

ROYAL COMMISSION ON THE OCEAN RANGER MARINE DISASTER

APPENDIX D

TERMS OF REFERENCE

ROYAL COMMISSION ON THE OCEAN RANGER MARINE DISASTER

1. Inquire into and report upon the loss of all members of the crew of the semi-submersible self-propelled drill rig "OCEAN RANGER", and of the "OCEAN RANGER", on or about the 15th day of February, 1982, on the Continental Shelf off Newfoundland and Labrador, the reasons and causes therefor and, without restricting the generality of the foregoing, to inquire into, report upon and make recommendations in respect of the following matters:
 - (a) the design, construction and stability of the " OCEAN RANGER" and its suitability to conduct marine and drilling operations on the Continental Shelf off Newfoundland and Labrador;
 - (b) inspection, inspection procedures, licensing, classification and certification pertaining to the conduct of marine drilling operations by the " OCEAN RANGER" on the Continental Shelf off Newfoundland and Labrador;
 - (c) all aspects of safety of life at sea, including the sufficiency of life saving equipment on board the " OCEAN RANGER" and whether such life saving equipment was used or could have been used;
 - (d) all aspects of occupational health and safety which related to the officers and crew of the " OCEAN RANGER";
 - (e) the certification, training and safety of the officers and the crew and their respective responsibilities including those of the Master and the Tool Pusher on board the " OCEAN RANGER";
 - (f) the search and rescue response and any other emergency response thereto, both from within Newfoundland and elsewhere;
 - (g) oil pollution prevention procedures and whether the drill hole was left in a safe condition prior to or at the time of the casualty;
 - (h) any acts or omissions of the owner, the charterer, the operator or any contractor in respect thereto; and
 - (i) any other related matter.
2. Inquire into, report upon and make recommendations with respect to
 - (a) both the marine and drilling aspects of practices and procedures in respect of offshore drilling operations on the Continental Shelf off Newfoundland and Labrador and without restricting the generality of the foregoing, the matters referred to in paragraphs 1.(a) to 1.(e) as they relate to other drilling units conducting marine and drilling operations on the Continental Shelf off Newfoundland and Labrador; and

- (b) to the extent necessary and relevant, such practices and procedures in other Eastern Canada offshore drilling operations.

It is advised that

- (a) the establishment of this Commission and the appointment of the Commissioners hereunder is without prejudice to both the claim of the Government of Canada and the claim of the Government of Newfoundland to legislative jurisdiction and proprietary rights on or in respect of the Territorial Sea or the Continental Shelf off Newfoundland and Labrador; and
- (b) notwithstanding the terms of reference set forth herein, the Commissioners be directed not to consider, comment upon nor make recommendations in respect of the claims to jurisdiction and rights aforesaid.

It is further advised that

- (a) the Honourable T. Alexander Hickman be the Chairman of the Commission and that the Honourable Gordon A. Winter be Vice-Chairman of the Commission;
 - (b) the Chairman and the Vice-Chairman be authorized, after consultation with the other Commissioners, to
 - (i) adopt such practices and procedures for all purposes of the Inquiry as may from time to time be necessary for the proper conduct of the Inquiry and, after consultation with the other Commissioners, vary those practices and procedures from time to time;
 - (ii) engage the services of counsel to aid and assist the Commissioners in the Inquiry at such rates of remuneration and reimbursement as may be approved;
 - (iii) rent such space for offices and hearing rooms as they deem necessary and advisable at such rates as may be approved;
 - (iv) engage the services of such accountants, engineers, technical advisors or other experts, clerks, reporters and assistants as they may deem necessary or advisable, at such rates of remuneration and reimbursement as may be approved; and
 - (v) exercise all powers conferred upon them by subsection (2) to subsection (4) of section 11 of the Inquiries Act of Canada, and by section 5 of the Public Enquiries Act of Newfoundland.
3. the Commissioners be authorized to sit at such times and in such places, and to view such locations, both in and outside Canada, as the Chairman may, after consultation with the other Commissioners, from time to time decide; and

4. the Commissioners be authorized to submit interim reports to the Governor-in-Council and to the Lieutenant Governor-in-Council from time to time.

It is further advised that the Commissioners be directed to submit a final report to the Governor-in-Council and to the Lieutenant Governor-in-Council with all reasonable dispatch.

GC 1 C37 No.63

Wilson, J.R.

An assessment of the state
of knowledge of east coa...

106592 12042211 c.1

