





Pictograph legend

\bigcirc	Anchorage	←	Current	Ø	Radio calling-in point
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	Wharf		Caution	lacksquare	Lifesaving station
	Marina	\ .	Light		Pilotage

Report discrepancies between real-world observations and descriptions in the publication

Users of this publication are requested to forward information regarding newly discovered dangers, changes in aids to navigation, the existence of new shoals or channels, or other information that would be useful for the correction of nautical charts and publications affecting Canadian waters to: chsinfo@dfo-mpo.gc.ca

IMPORTANT NOTICE

The Canadian Hydrographic Service no longer produces hard copies of its publications.

Updates are published in Notices to Mariners at <u>notmar.gc.ca</u> and on the Canadian Hydrographic Service website at <u>charts.gc.ca</u>

REPRODUCTION FOR PERSONAL USE

This digital publication - as published in <u>charts.gc.ca</u> - may be printed or reproduced in any format, without charge or further permission, provided that it is for non-commercial purposes, i.e. not for sale or any profit whatsoever.

To be used for navigation, the reproduction must be an unaltered, true copy of the publication found in ca, and kept up-to-date at all times.

REPRODUCTION FOR COMMERCIAL PURPOSES

This publication shall not be printed or otherwise reproduced in whole or in part for commercial purposes (i.e. in the purpose of sale or any profit whatsoever, as opposed to personal use), without prior written permission from the Canadian Hydrographic Service.

For more information, contact:

Canadian Hydrographic Service
Fisheries and Oceans Canada
200 Kent Street, Ottawa, Ontario, Canada, K1A 0E6
charts.gc.ca
chsinfo@dfo-mpo.gc.ca

© His Majesty the King in Right of Canada, as represented by the Minister of the Department of Fisheries and Oceans, 2024 Catalogue No. Fs74-62E-PDF ISSN 2816-4997 Ottawa

Record of Changes

As the CHS acquires new information, relevant changes are applied to Sailing Directions volumes in order to maintain safety of navigation. It is the responsibility of the mariner to maintain their digital Sailing Directions file by ensuring that the latest version is always downloaded. Visit charts.gc.ca to download the most recent version of this volume, with all current changes already incorporated.

The table below lists the changes that have been applied to this volume of Sailing Directions. This record of changes will be maintained for the current calendar year only.

Date	Chapter / Paragraph	Description of Change
04/2024	C4/P179	Removed mention of buoys located in a channel.

TABLE OF CONTENTS

	Preface	VI
	Explanatory notes	VII
	Abbreviations	IX
CHAPTER 1	Lake Huron — East shore	
	General	1-1
	Northern approaches to St. Clair River	1-2
	Point Edward	1-3
	Point Edward to Goderich	1-4
	Port Franks	1-6
	Grand Bend	1-7
	Bayfield	1-8
	Goderich	1-9
	Goderich to Fishing Islands	
	Kincardine	1-12
	Port Elgin	1-14
	Approaches to Southampton	1-15
	Southampton	
	Sauble River	1-17
	Fishing Islands	1-17
	Approaches to Oliphant	1-18
	Oliphant to Red Bay and Pike Bay	1-19
	Approach channels	1-19
	Fishing Islands to Cape Hurd	1-20
	Stokes Bay	
	Stokes Bay to Cape Hurd	1-22
CHAPTER 2	Lake Huron — North Shore	
	General	2-1
	Entrance channels	2-2
	Manitoulin Island	2-2
	Hungerford Point to Providence Bay	
	South Bay	2-3
	South Baymouth to Providence Bay	
	Providence Bay to Duck Islands	2-4
	Duck Islands	2-6
	Duck Islands to Mississagi Strait	2-7
	Mississagi Strait	2-9
	South Shore of Cockburn Island	2-10
	False Detour Channel	2-10
	East side of channel	2-10
	South Shore of Drummond Island	2-10
CHAPTER 3	St. Marys River	
	General	
	St. Marys River Vessel Traffic Service	3-3
	De Tour Passage	
	Munuscong Lake to Lake Nicolet	3-5
	St. Marys Falls	
	Sault Ste. Marie (Canada) Canal	
	Sault Ste. Marie	
	St. Marys Falls to Gros Cap Reefs	3-12
	Birch Point to Whitefish Bay	3-13

CHAPTER 4	Lake Superior — East Shore	4.4
	General	4-1
	Approaches to St. Marys River from NW	
	South and west sides of Whitefish Bay	
	East side of Whitefish Bay	
	Coppermine Point to Montreal River	
	Montreal River to Cape Gargantua	
	Cape Gargantua to Michipicoten Bay	
	Michipicoten Bay	4-9
CHAPTER 5	Lake Superior — NE Shore	
	General	5-1
	Offshore dangers	5-2
	Superior Shoal	
	Michipicoten Bay to Pilot Harbour	
	Michipicoten Island, North Side	
	Caribou Island	5-3
	Off-lying banks	
	Michipicoten Island, South Side	
	Approaches to Quebec Harbour	
	Quebec Harbour	5-4
	Pilot Harbour to Otter Island	
	Otter Island to Peninsula Harbour	
	Approaches to Peninsula Harbour	5-8
	Peninsula Harbour to Bottle Point	5-9
CHAPTER 6	Lake Superior — Nipigon Bay and Approaches	
CIMII IERO	General	6-1
		0.4
	Bottle Point to Schreiber Point	
	Approaches to Nipigon Bay	
	South Sides of St. Ignace and Fluor Islands	
	Channels to Nipigon Bay	
	Schreiber Channel to Rossport	
	Routes north of Channel Island	
	Simpson Channel	
	NT	C 0
	Crow Point to Vert Island	
	Vert Island to Nipigon River	
	Nipigon Strait to Nipigon River	
	Labo Comercian - Black Boy and Americanhae - Thorn	adan Davi
CHAPTER 7	Lake Superior — Black Bay and Approaches — Thur General	nder Bay 7-1
	Nipigon Strait to Black Bay	
	Approaches to Black Bay	
	Black Bay	
	Approaches to Thunder Bay	
	Isle Royale	
	Passage Island to Port of Thunder Bay	
	Passage Island to Thunder Cape	
	Thursday Day East Entrance	7 10

	Pigeon Bay to Port of Thunder Bay	7-12
	Off-lying islands and shoals	
	Victoria Island to Port of Thunder Bay	
	Approaches to Port of Thunder Bay	
	Port of Thunder Bay	
	Southern part of Port of Thunder Bay	
	Facilities in Thunder Bay	
	North and east shores of Thunder Bay	
APPENDICES	Sailing Plan	A-1
	Table of Marine Facilities	
	List of Lights, Buoys and Fog Signals	
	Index	I-1

he First Edition of Sailing Directions, CEN 305 — Lake Huron, St. Marys River, Lake Superior, 2000, has been compiled from Canadian Government and other information sources. In general, all hydrographic terms used in this booklet are in accordance with the meanings given in the Hydrographic Dictionary (Special Publication No. 32), published by the International Hydrographic Bureau.

This edition uses a new presentation of the description of the geographical areas.

General information for the Great Lakes is grouped in one booklet: *Sailing Directions*, *CEN 300 — General Information*, *Great Lakes*. It contains navigational information and a brief description of the main port facilities as well as geographic, oceanographic and atmospheric characteristics. Booklet *CEN 300* also includes a geographical index for the Great Lakes area.

The geographical areas are described in a series of booklets; their limits are shown on the back cover of each booklet. For more information, consult the *Catalogue of Nautical Charts and Publications, Great Lakes and St. Lawrence River*.

Tidal, water level and current information has been revised by the Tides, Currents and Water Level Section of the Canadian Hydrographic Service.

The information quoted from the *List of Lights, Buoys and Fog Signals* in the Appendix is updated monthly by the Canadian Coast Guard and is available at the Fisheries and Oceans Canada web site: www.notmar.com.

The photographs are by the Canadian Hydrographic Service, Fisheries and Oceans Canada.

Users' comments concerning the format, content or any other matter relating to *Sailing Directions* would be appreciated and should be forwarded to the Director General, Canadian Hydrographic Service, Fisheries and Oceans Canada, Ottawa, Ontario, Canada K1A 0E6.



anadian Sailing Directions amplify charted details and provide important information of interest to navigation which may not be found on charts or in other marine publications. Sailing Directions are intended to be read in conjunction with the charts quoted in the text.

Remarks

Buoys are generally described only where they have special navigational significance or where the scale of the chart is too small to show details.

The word "**private**", when applied to an aid to navigation, means the aid is privately maintained and may not appear in the *List of Lights, Buoys and Fog Signals* and may be changed without warning.

Chart references, in italics in the text, normally refer to the largest scale Canadian chart but occasionally a smaller scale chart may be quoted where its use is more appropriate.

Tidal information is not given; this information is available in *Canadian Tide and Current Tables*. Any known unusual changes in water level, however, are mentioned.

Names have been taken from the most authoritative source. Where an obsolete name still appears on the chart or is of local usage, it is given in brackets following the official name.

Wrecks are described where they are relatively permanent and may affect surface navigation.

Units and terminology used in this booklet

Latitude and **longitude** given in brackets are approximate and are intended to facilitate reference to the chart quoted.

Bearings and **directions** refer to True North (geographic) and are given in degrees from 000° clockwise to 359°. The bearings of conspicuous objects, ranges and light sectors are given from offshore. Courses always refer to the course to be made good.

Tidal streams and **currents** are described by the direction towards which they flow. The **ebb** stream is caused by a falling tide and the **flood** stream is caused by a rising tide. **Winds** are described by the direction from which they blow.

Distances, unless otherwise stated, are given in nautical miles of 1,852 m.

Speeds are given in knots, which means nautical miles per hour.

Depths, unless otherwise stated, refer to chart datum. As depths are liable to change, particularly those in dredged channels and alongside wharves, it is strongly recommended that these be confirmed by the appropriate local authority.

All the **marinas** that could be located were asked for details of their facilities and the depths at their docks. The marine facilities information listed in the Appendix is a compilation of the details reported by each marina operator. As these facilities often change from year to year, it is suggested that users contact the marina operators for confirmation of depths and facilities available.

Elevations and **vertical clearances** are given above chart datum.

Heights of structures refer to ground level. Heights of islands refer to chart datum.

Deadweight tonnage and mass are given in metric tonnes of 1,000 kilograms (2,204.6 pounds). The kilogram is used for small masses.

Where sections are quoted verbatim from *U.S. Coast Pilot 6*, the figures in square brackets [thus] after **units of measurement** are the International System of Units (SI) equivalent in nautical miles, metres or tonnes.

Numbers in brackets after population statistics is the census year. The number in brackets after the name of a light or light buoy is its *List of Lights*, *Buoys and Fog Signals* number.

Time is given in Eastern Standard Time or Eastern Daylight Saving Time. Information on time zones is given in the booklet *CEN 300 — General Information, Great Lakes*.

Public wharf is a Government wharf that is available to the public. It may be shown on older charts as "Government Wharf" or "Govt Whf". A fee is usually charged for dockage. Many of these

wharves are reserved for use by local fishing fleets or by other agencies.

Conspicuous objects, natural or artificial, are those which stand out clearly from the background and are easily identifiable from a few miles offshore in normal visibility.

Prominent objects are those which are easily identified but are not conspicuous.

Small craft refers to pleasure craft and, in general, to small vessels with shallow draught.

Pictographs are the symbols placed at the beginning of certain paragraphs. Their main purpose is to allow quick reference to information or to emphasize details. Consult the Pictograph Legend shown on the back cover of this booklet



References to other publications:

Canadian Coast Guard

- · List of Lights, Buoys and Fog Signals
- Radio Aids to Marine Navigation (Atlantic and Great Lakes)
- Ice Navigation in Canadian Waters
- Annual Edition of Notices to Mariners
- The Canadian Aids to Navigation System
- Merchant Ship Search and Rescue Manual (CANMERSAR)

Environment Canada

- Great Lakes Marine Weather Guide
- Great Lakes Climatological Atlas

Canadian Hydrographic Service

- Canadian Tidal Manual
- Chart No. 1 Symbols, Abbreviations and Terms
- Tides in Canadian Waters
- Notes on the Use of Loran-C Charts
- Canadian Tide and Current Tables
- Catalogue of Nautical Charts and Publications (Great Lakes)

U.S. Department of Commerce, National Ocean Service

• U.S. Coast Pilot 6, Great Lakes

The St. Lawrence Seaway Management Corporation

• Seaway Handbook

Units

°C

centimetre cm ft foot h hour ha hectare kHz kilohertz km kilometre kn knot kPa kilopascal m metre min minute MHz megahertz mm millimetre metric tonne t degree (plane angle) minute (plane angle)

degree Celsius

Directions

N north

NNE north northeast
NE northeast
ENE east northeast
E east

ESE east southeast SE southeast SSE south southeast

S south

SSW south southwest SW southwest WSW west southwest W west

WNW west northwest NW northwest NNW northwest

Various

CCG Canadian Coast Guard

CHS Canadian Hydrographic Service

HF high frequency (radio)

HW high water

IGLD International Great Lakes Datum

LW low water M million, mega

MCTS Marine Communications and Traffic Services


NAD North American Datum
SAR Search and Rescue
VHF very high frequency (radio)
VTS Vessel Traffic Services


Lake Huron — East shore

General

Chart 2200

This chapter covers the Canadian waters of Lake Huron from the head of St. Clair River northward for 135 miles to Cape Hurd at the NW end of the Bruce Peninsula.





- 1.2 45°17′00″N., 83°00′00″W.;
- 1.3 45°20′24″N., 82°31′18″W.;
- 1.4 44°31′00″N., 82°19′54″W.;
- 1.5 44°27'42"N., 82°47'08"W.;

is used periodically for air to air gunnery practice from the surface to an altitude of 45,000 feet [13,720 m] from sunrise to sunset. The using agency is the Commander, Permanent Field Training Site Detachment, Phelps-Collins ANGB, Alpena, MI, and the controlling agency is Minneapolis ARTC Center, Federal Aviation Administration.


The southern two-thirds of the east shore of Lake Huron is generally low and flat and fronted by a band of shallow water that deepens gradually. The northern one-third, particularly in the area of Fishing Islands, is irregular with many reefs.

Cape Hurd, Goderich is the only harbour suitable for Seaway-draught vessels and Stokes Bay is the only anchorage suitable for smaller vessels. Only a few of the small-craft anchorages are accessible in bad weather.

- 4 Most of the Canadian charts referred to in this chapter are based on modern surveys carried out between 1974 and 1999. *Chart* 2292, however, is based largely on lead line surveys carried out much earlier but incorporates any dangers discovered during more recent echo-sounder surveys.
- 4.1 **Light buoys**. An *Ocean Data Acquisition System (ODAS)* meteorological light buoy, marked *45149*, is moored 16 miles west of Bayfield. *ODAS* light buoy *45008* is moored 33 miles WNW of Point Clark.



5 **Caution**. — The possibility of encountering unreported dangers is greatest in areas such as **Fishing**

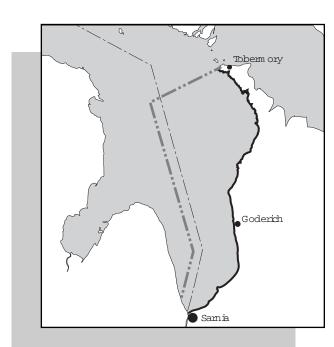

Islands that have uneven bottom topography and were surveyed by lead line.

- Depths and elevations quoted in this chapter refer to chart datum (see Sailing Directions booklet CEN 300 General Information, Great Lakes) and thus agree with charted values. Because Chart 2292 is based on an older water level datum, depths and elevations on that chart must be corrected to refer them to the presently adopted datum for Lake Huron. The required correction is noted on the chart. (More information on older water level datums is given in Sailing Directions booklet CEN 300 General Information, Great Lakes.)
- 6.1 Real-time water level information for Lake Huron at Point Edward is available from the *Canadian Hydrographic Service Automated Water Level Gauge*, telephone number 519-344-0263 and for Lake Huron at Goderich from the *Canadian Hydrographic Service Automated Water Level Gauge*, telephone number 519-524-8058. (More information on water levels is given in Sailing Directions booklet CEN 300 General Information, Great Lakes.)
- Sarnia Vessel Traffic Services (VTS) Zone covers Canadian waters from Long Point light in Lake Erie to the south end of De Tour Passage, in Lake Huron. Information on this system is given in Radio Aids to Marine Navigation (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic); visit https://www.ccg-gcc.gc.ca/publications/index-eng.html#mcts.
- 8 Upbound and downbound sailing courses and limits recommended by the *Lake Carriers Association* and the *Canadian Shipowners Association (see Sailing Directions booklet CEN 300 General Information, Great Lakes)* are shown on the charts.

9 Pilotage is compulsory in the Great Lakes. For details of the pilot control areas see the annual edition of *Notices to Mariners*. Masters of vessels intending to navigate in Great Lakes waters should consult the *Great Lakes Pilotage Regulations*.

Northern approaches to St. Clair River

Charts 14862, 14865

Lake Huron flows into St. Clair River at the south end of the lake. The village of **Point Edward**, Ontario, (43°00′N, 82°25′W) and the city of **Port Huron**, Michigan, (both described in Sailing Directions booklet CEN 304 – Detroit River, Lake St. Clair, St. Clair River) lie on opposite banks at the head of the river.



11 **Caution**. — The **current** is reported to flow past Point Edward at a rate of more

The *Blue Water Bridge*, the grain **elevator** at Sarnia and a tall apartment **building** close east of *Sarnia Yacht Club Basin* are **conspicuous** from Lake Huron (*Chart 14852*). A chimney and a storage tank at a paper plant close south of *Fort Gratiot light* are prominent.

There is a ship channel 5 miles long and 800 feet (244 m) wide dredged from the deep water of Lake Huron to the head of the St. Clair River through a large **shoal** area at the southern end of the lake. The controlling depth in the channel is promulgated periodically in the *United States Coast Guard Local Notices to Mariners*.


14 Caution. — The master of any vessel in Lake Huron requiring a pilot for southward passage through the St. Clair River should not enter the buoyed channel until the pilot has boarded. A vessel awaiting a pilot

should stay clear of the channel entrance.

[from U.S. Coast Pilot 6, Chapter 10, partial]

- Fort Gratiot Light (43°00'23"N., 82°25'21"W.), 15 82 feet [25 m] above the water, is shown from a white brick conical tower on the W side of the head of St. Clair River. Port Huron Coast Guard Station is close S of the light. A regulated navigation area has been established off the Coast Guard Station. (See 33 CFR 165.1 through 165.13 and 165.920, chapter 2 [of U.S. Coast Pilot 6], for limits and regulations.) Dredging spoils are adjacent to both sides of the dredged channel. On the E side of the channel, the spoil bank extends about 4 [3.5] miles N from Point Edward and is about 1 [0.9] mile wide with depths of 6 to 12 feet [1.8 to 3.6 m]. A wreck, covered 15 feet [4.5 m], is E of the channel 3.4 [3] miles NE of Fort Gratiot Light. On the W side of the channel, the spoil bank has depths of 9 to 15 feet [2.7 to 4.5 m] for 4.5 [3.9] miles N of Fort Gratiot Light, thence 16 to 24 feet [4.9 to 7.3 m] for another 1.5 [1.3] miles N.
- 16 **Black River Canal**, entered about 1.4 [1.2] miles NNW of Fort Gratiot Light, extends SW for about 1.1 [1] miles to its junction with the Black River.
- 17 From the head of the St. Clair River NNW for 19 [16.5] miles to Lexington, the shore is low. In this stretch, the lake bottom is generally rocky with depths to 18 feet [5.5 m] extending 1.3 [1.1] miles offshore. A shoal with a least depth of 12 feet [3.7 m] is 0.9 [0.8] mile NE of the mouth of **Burtch Creek**, 7 [6.1] miles S of Lexington. A 16-foot [4.9-m] diameter potable water intake extends from shore 5.7[5] miles NNW of Fort Gratiot Light NE for 5 [4.3] miles to a crib covered 38 feet [11.6 m]. A wreck, covered 29 feet [8.8 m], is 10.7 [9.3] miles NNE of Fort Gratiot Light.
- The ship channel is marked by **light buoys**. The north end is marked by *Lake Huron Cut light buoy 11* (*U.S. 10085*) on the west side and *Lake Huron Cut light buoy 12* (*U.S. 10090*) on the east side. The south end is marked

POINT EDWARD AND ST. CLAIR RIVER (1998)

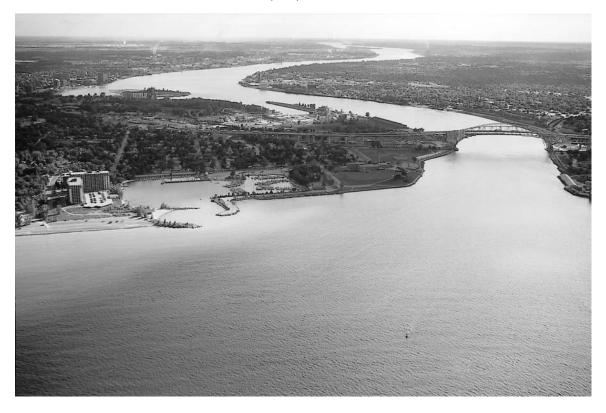

by Lake Huron Cut light buoy 1 (U.S. 10035) on the west side and Lake Huron Cut light buoy 2 (770) on the east side.

19 Lake Huron Cut light 7 (U.S. 10065), on the west side of the channel 2 miles from the north end, is shown at an elevation of 47 feet (14.3 m) from a white cylindrical **tower** with a square green **daymark**. The light structure has a **foghorn** and a **racon**.

- 20 Point Edward range (768, 769), on the east side of the head of St. Clair River, leads through the inner section of the buoyed channel to the intersection with Fort Gratiot range (U.S. 9990, 10000).
- 21 *Sarnia Airport*, 5 miles east of Point Edward, has an aeronautical **light**.
- The *Sarnia Yacht Club* establishes an array of 9 spar buoys 0.5 to 3.5 miles east of the Lake Huron Cut ship channel each year during the boating season. These buoys are used during club regattas.
- The area east of the southern 3 miles of the dredged channel has **shoals** and **obstructions** formed by spoil from dredging operations.
- There are three **submerged wrecks** 9 miles NNE of *Fort Gratiot light*. Another **submerged wreck** is 3 miles NE of *Fort Gratiot light*.

- 24.1 There are two **submerged wrecks**, depth unknown and not charted, 8.25 and 12.5 miles NE of *Fort Gratiot Light*, respectively.
- Sarnia is a **Customs** vessel clearing station for commercial traffic and a vessel reporting station for pleasure craft.

Zone calling-in points for upbound and downbound vessels at Lake Huron Cut. These are mandatory reporting points under the provisions of the St. Clair and Detroit River Navigation Safety Regulations. (Consult Radio Aids to Marine Navigation (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic for more information.)

Point Edward

- Sarnia Yacht Club Basin is on the east shore of Lake Huron close north of Point Edward. Breakwaters on both sides of the entrance protect the basin.
- The harbour is entered between the breakwaters. The entrance channel is subject to **silting** but is reported to be dredged periodically to a depth of 8 feet (2.4 m).



29 **Caution**. — A **current** of 2 to 4 knots flows SW across the harbour entrance.

There is a **conspicuous** apartment **building** close east of the harbour.

COW CREEK (1998)



The entrance to the harbour is marked by **lights** and **daymarks**. These aids are privately maintained.

on the south side of the harbour. Each range mark consists of two fixed green lights in a vertical line shown from a mast with an orange diamond-shaped **daymark**. The lights in line bearing 184° lead to the harbour from offshore.

33 Sarnia Yacht Club is in the western part of the harbour, Lake Huron Yachts is in the eastern part. Blunt's Barge is the chandlery store here.

Both marinas at Point Edward are **Customs** vessel reporting stations for pleasure craft.

Point Edward to Goderich

Charts 2228, 2260

There is a Sarnia Vessel Traffic Services Zone calling-in point for downbound vessels at latitude 43°10′N. (Consult Radio Aids to Marine Navigation (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic) for more information.)

36 Caution. — There are many fishing nets between Sarnia and Cedar Point and from Stoney Point to Grand Bend. These nets hang from the surface and are set in strings of ten or more nets extending as far as three miles offshore. There are usually passages through the nets every 200 m, marked by black flags.

Blue Point (43°06′N, 82°09′W), 13 miles ENE of Point Edward, is wooded and prominent.

The coast from Point Edward 11 miles eastward towards Blue Point is low and thinly wooded. A coastal bluff, elevation 15 m, begins 2 miles SW of Blue Point. The bottom, good holding ground of mostly sand and **boulders**, shelves gently towards the shore.

A sand and stone **reef**, dry in places, lies close offshore 2.4 to 3.3 miles east of *Point Edward range*.

40 **Caution**. — The **ruins**, **awash**, of a rock crib have been reported near this reef. This danger is not charted.

Point Edward. Two **breakwaters** 107 m long form the entrance and make a refuge for small boats; this is exposed to northerly and westerly winds. The creek is subject to **silting**. There is a clearance of 3.6 m under a highway **bridge** 0.1 mile from the mouth of the creek. There are private **wharves**

HIGHLAND GLEN (1998)



upstream of this bridge. A current of 1 knot has been reported in Cow Creek.

- A private **radio tower** near the shore 0.6 mile WSW of the entrance to Cow Creek is 21 m high, elevation 28 m. A **radio tower** 2.4 miles east of the creek has an elevation of 91 m. Both towers have air obstruction **lights**.
- The coast is low with a shallow **bank** of **boulders** and **stones** that extends up to 2 miles offshore between Blue Point and Kettle Point, 9 miles to the NE. The coast rises to an elevation of 16 m3 miles NE of Blue Point.
- Highland Glen Conservation Area is a day-use park, with picnic areas, operated by the St. Clair Region Conservation Authority 1.5 miles ENE of Blue Point. There is a concrete launching ramp 5.9 m wide, protected by two sheet steel breakwaters. The east breakwater is longer and is marked by an orange light. The area inside the breakwaters dries at chart datum (1998).
- 45 **Cedar Point** is 5 miles NE of Blue Point.


46 **Caution**. — There is a large drying **rock**, known locally as **Rock Island**, 0.3 mile west of Cedar Point. The waters to the north, between Rock Island and the

shore, are dangerous without local knowledge. Breaking waves usually mark Rock Island.

47 Orchard View Park is a private trailer park and campground 0.5 mile SW of Cedar Point. It has a privately maintained orange **light**. Cedar Cove Marina is 0.1 mile to the NE. Fishing charters are available locally. Private **buoys** mark the approach to this marina.

- The community of **Forest**, 6 km SE of Cedar Point by paved road, has churches, banks, post office, several shops, pharmacy, motels, hotel, restaurants, laundromat, museum, liquor and beer store, veterinarian, dentist and a medical centre.
- Kettle Point $(43^{\circ}13'N, 82^{\circ}01'W)$ is the north end of Cape Ipperwash. The point is named for the round boulders resembling kettles that are found on the shale beds in the vicinity. Kettle Point Reef extends 2 miles NW from Kettle Point. The reef is marked to the NW by Kettle Point Reef light buoy V4 (771) and to the west by a buoy.
- There is a prominent **water tower** with an elevation of 58 m 3.7 miles SE of Kettle Point. The tower has air obstruction **lights**.

PORT FRANKS (1991)

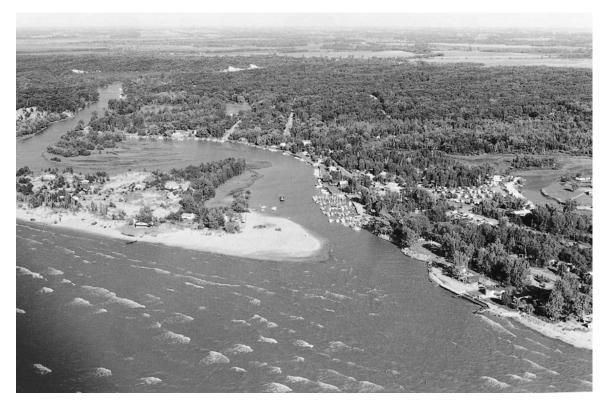

- A **submerged water pipeline** extends 0.4 mile offshore close south of the marina. The intake **crib** at the outer end has a depth of 1.8 m.
- Stony Point, solid rock scattered with boulders, is 3 miles east of Kettle Point. The shore becomes a fine sand beach between Stony Point and Grand Bend, 10 miles to the NE, backed by a thin growth of stunted pines and by sand dunes that show up well in the afternoon sun.
- A **submerged water intake pipeline** 0.6 mile ESE of Kettle Point extends 0.5 mile offshore.

Port Franks

- The west branch of **Ausable River** enters the lake at Port Franks, 5 miles east of Kettle Point. There is a harbour, used by pleasure craft and fishing vessels, at the river entrance. The river is reported to be navigable for 5 miles with depths from 0.9 to 3.7 m over sand and clay bottom.
- A prominent **lookout tower** 3.5 miles ENE of the entrance to the west branch of Ausable River has an elevation of 63 m.
- Ausable River entrance is scoured annually by spring run-off to a reported depth of 1.8 m. The channel is subject to **silting**. There are reported to be depths of 1.2 to 1.5 m during the boating season. Deepest water is usually on the south side.

- 58 **Caution.**—A shifting **sandbank** with depths as little as 0.3 m lies off the entrance channel. Local marinas often guide visiting craft on request.
- The entrance channel is marked by privately maintained **buoys**. These buoys may be moved to indicate the best channel.
- 60 **Caution**. The approaches to Port Franks are unsafe and there is **surging** inside the river entrance in moderate or strong **NW winds**.
- The community of **Port Franks** is 0.5 mile upstream of the river mouth. Port Franks has churches, a general store, post office, a museum and restaurants.
- The *Highway 21* **bridge** over the Ausable River 2 miles inland has a vertical clearance of 5.3 m.
- Port Franks is a **Customs** vessel reporting station for pleasure craft.
- 64 Rivermouth Marina, Huron Shores Marine, Lighthouse Marina, Burnett Great Lakes Marine and Seven Winds Marina are at Port Franks. Kennedy's Landing is a private facility.
- 65 Port Franks Conservation Area is administered by the Ausable and Bayfield Conservation Authority. Facilities include dockage with power and water, ramp, picnic area, showers and ice.

GRAND BEND (1991)



66 Harbourside Trailer Park has no facilities for small craft.

68 Pinery Provincial Park extends along the shore for 4.6 miles NE of Port Franks. This park is set in one of the largest forests in southwest Ontario. There are campsites but no small-craft facilities. Vessel operation is prohibited within 300 m of shore but day anchorage is allowed at the north and south ends of the park.

Grand Bend

Grand Bend (43°19′N, 81°46′W), on the north branch of Ausable River 7.5 miles NE of Port Franks, is a summer resort with a large amusement park. The village of Grand Bend, population 1,027 (1996), has churches, bank, medical centre, doctor, dentist, post office, stores of all kinds, hotels, motels, veterinarian, restaurants, laundromat, liquor and beer store, golf, tennis and Lambton Heritage Museum. The buildings in the community are prominent from offshore.

A red and white television tower 0.8 mile south of the Grand Bend harbour entrance is 46 m high, elevation 62 m. A red and white television tower 1 mile east of the harbour entrance is 64 m high, elevation 71 m. Both towers have air obstruction lights. A prominent building on the beach NE of Grand Bend harbour makes a good landmark.

71 The harbour at Grand Bend is a recreational harbour administered by the *Department of Fisheries and Oceans* and managed by the municipality.

72 A *Highway 21* **bridge**, clearance 7.2 m, crosses Ausable River 0.5 mile from the harbour entrance.

Grand Bend harbour is formed by a dredged area in the mouth of Ausable River west of the *Highway 21* bridge. The harbour entrance is protected by concrete **piers** extending out into the lake but is open to the west.

7 **v**

74 **Caution**. — Moderate or strong **west or NW winds** cause **surging** in the harbour.

75 **Caution.** — **Sand bars** tend to form around the entrance to Grand Bend and NW winds can cause rapid **silting**. The entrance channel is reported to be maintained by dredging during the boating season. Mariners are cautioned to approach the entrance with care.

There are privately maintained **buoys** in the entrance channel. The buoys are reported to be moved to best mark the channel.

77 There are depths of 1.5 to 1.9 m in the harbour, with depths of 0.9 to 1.5 m along the north and south shores (1988). A **Public wharf** on the north shore has depths of 0.3 m. The boat basin on the south shore near the south pier has reported depths of 1.1 m (1996). Visiting craft

usually berth alongside the retaining wall on the north side of the harbour. The elevation of the retaining wall is 1.5 m.



78 Grand Bend light (774) is on the outer end of the north pier. There is a **foghorn** at the light.

79 There is a starboard-hand **daybeacon** at the outer end of the south pier; there is a privately maintained **light** above the daybeacon.

Grand Bend is a **Customs** vessel reporting station for pleasure craft.

of Grand Bend; Manore Marine, east of the bridge on the north shore of the river; and Southwest Marine Services, Roszell-Warner Marine and Saga Bound Bookstore, all in town, are local marinas and marine suppliers. Grand Bend Yacht Club is a private facility on the south side of Ausable River.

A sandy beach, fringed with large trees, extends 15 miles northwards to Bayfield. The beach is backed by a clay bluff that rises to an elevation of 15 m 0.5 mile NE of Grand Bend. There is a shallow **bank** 0.4 mile wide off this shoreline. The bank is **foul** and covered with large **boulders** between **Dewey Point**, 7 miles NNE of Grand Bend, and Bayfield.

There is a prominent **microwave tower** 2.1 miles NE of Grand Bend.

A **submerged water pipeline** 1.9 miles NNE of Grand Bend extends 1.3 miles offshore to an intake **crib** submerged 8.7 m.

Cantin Shoal is 0.7 mile offshore 2.8 miles NNE of Grand Bend.

85.1 A wreck, in about 22 m of water, lies 7.6 miles NW of Grand Bend.

There is a prominent white church **spire** topped with a white cross 1 mile NE of Dewey Point. A **conspicuous communications tower** 0.6 mile NE of Bayfield harbour has an elevation of 134 m; it has air obstruction **lights**.

The **wreck** of a steel vessel 37 m long lies 0.3 mile south of Bayfield. This wreck is in two sections (1991).

Charts 2228, 2261

Bayfield

88 **Bayfield River** (43°34′N, 81°42′W) enters the lake 15.5 miles north of Grand Bend. The harbour at Bayfield is entered between two **breakwaters** at the mouth of the river. The south breakwater is 195 m long. The north breakwater is 64 m long but extends farther into the lake due to the configuration of the shore. The harbour extends 0.5 mile

BAYFIELD (1991)



inland to a **bridge** at *Highway 21*. The entrance to Bayfield harbour is subject to **silting** and is reported to be maintained by dredging.

89 Caution. — A submerged sewer outfall 0.1 mile north of the harbour entrance extends 200 m offshore.

The harbour at Bayfield is a recreational harbour administered by the *Department of Fisheries and Oceans* and managed by the municipality.

91 Bayfield wharf light (776) is on the south breakwater.

92 Bayfield range lights (775.5, 775.6) are on the north side of the entrance.

93 The **Public wharf** on the south side of the harbour is 213 m long with depths of 1.5 to 2.1 m (1991).

There is a fishermen's **wharf** 152 m long on the north side of the harbour with a depth of 2.1 m (1991).

The *Highway 21* **bridge** across the river at the east end of the harbour has a clearance of 4.7 m. There is an **overhead power cable**, clearance 7.8 m, close downstream of the bridge.

The village of **Bayfield**, south and east of the harbour, has a population of 833 (1996) which increases to more than 2,000 in the summer. Bayfield has churches, several stores, doctor, dentist, post office, restaurants, motels, hotels, laun-

dromat, liquor and beer store, service stations, golf and tennis and a bank.

97 Bayfield is a **Customs** vessel reporting station for pleasure craft.

98 Harbour Lights Marina, on the north side of the entrance channel; Bayfield Marine Services, on the north side of the harbour; South Shore Marina; and Bayfield Village Marina offer a variety of services and goods. Colonial Cottages is a private facility on the north shore.

There is a clay bluff 23 m high along the coast between Bayfield and Goderich, 10.5 miles to the north, with a few farm buildings visible from offshore.

Blacks Point, 3 miles south of Goderich, is not prominent but a grey water tower with air obstruction lights, 1 mile to the SE, is conspicuous.

There is a sewage treatment plant 0.9 mile south of Goderich. A boulder **breakwater**, marked at the outer end by a privately maintained yellow **buoy**, extends 0.3 mile offshore from the plant.

Chart 2228

Goderich

Goderich Harbour (43°45′N, 81°44′W) is close south of the mouth of Maitland River. The harbour limits include the waters of the harbour and the approaches for 1 mile offshore. Goderich is the largest producer of salt in

GODERICH (1998)



Lake Huron, St. Marys River, Lake Superior

North America and is a major shipment port for grain. The port was used by 252 commercial vessels in 1999.

The shafts, buildings and **storage domes** of the *Sifto Canada* salt mine on the east side of the outer harbour and the grain **elevators** along the south side of the inner harbour are **conspicuous**. Church **spires** in the town are prominent.

A dredged channel marked by privately maintained seasonal **buoys** leads along the north side of the harbour breakwall and through the river entrance to two marina basins. This channel is reported (2000) to be dredged each year to a depth of 2.4 m.



105 **Caution.** — **Westerly winds** can cause strong **surging** in the Maitland River entrance.

The town of **Goderich**, population 7,428 in 1997, is built on high land SE of the harbour. The town has all the commercial and service facilities of a busy resort town, including banks, doctors, dentists, a hospital and a veterinary clinic. Goderich is on *Highways 8* and 21 and has truck and rail freight and express services. *Goderich Municipal Airport* is 3 km north of town.

A Canadian Coast Guard Search and Rescue Cutter is based at Goderich during the navigation season (see information on search and rescue in Sailing Directions booklet CEN 300 — General Information, Great Lakes). Direct all calls to the Sarnia MCTS Centre, call sign VBE. (Consult Radio Aids to Marine Navigation (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic) for more information.)

Goderich is a **Customs** vessel clearing station for commercial traffic and a vessel reporting station for pleasure craft.

Two detached concrete **breakwaters**, with an entrance opening 160 m wide, protect the outer harbour. The inner harbour is an artificial basin entered between the *Sifto Canada* **wharf** and a concrete **pier** 55 m to the south. The pier is illuminated.

110 Vessels loading salt lie abreast of the conveyor-loader on the *Sifto Canada* wharf. This wharf has wooden fenders.

111 **Caution**. — Self-unloading vessels sometimes **obstruct** the entrance channel with their unloading equipment while being loaded from the conveyor system.

The entrance channel has been dredged as shown on the chart. **Buoys** mark the dredged turning basin in the outer harbour.

113 A **submerged power cable** crosses the outer harbour between the shore end of the south pier and the outer breakwater.

wind.

114 **Caution**. — Water levels in Goderich inner harbour fluctuate with the direction and force of the

winds cause strong surging in the harbour. Waves reflecting off the walls of the basin in north gales and SE winds can create uncomfortable seas and local surging in the basin entrance and inner harbour.

south of the harbour entrance. This light is obscured to the south by trees (1998).

117 *Maitland River light (778.5)* is on the outer end of the boulder breakwater that forms the south side of the river entrance.

North Breakwater light (778) and South Breakwater light (779) are on the west ends of the breakwaters.

119 *North Pier range lights (780, 781)* lead through the channel between the breakwaters.

There is an aeronautical **radiobeacon** 20 m NNW of the front range structure.

The grain **elevators** along the south side of the inner harbour have a capacity of 129,000 tonnes of wheat. There are four marine legs, with an unloading capacity per leg of 700 tonnes of wheat per hour, and two loading spouts. The **wharves** have a steel rubbing strake and are fitted with rubber tire fenders. There is a steel turning pad with rubber shock absorbers near the south corner of the basin.

122 *MacDonald Marine* operates four small tugs; the tugs monitor VHF Channel 14. *MacDonald Marine* also offers tours of the harbour and the waterfront.

123 Electrical power is available at the wharves; water and fuel can be supplied by tanker truck. There is a good selection of marine services and technicians in town.

Maitland Inlet Marina, on the north side of the Maitland River entrance, and Maitland Valley Marina, on the south side of the river in a basin east of **Indian Island**, offer a clubhouse, pool and private beach; Snug Harbour is a municipal marina on the west side of the inner harbour; Argyle Marine and Small Engines is in town.

124.1 Maitland Valley Marina and Snug Harbour are Canada Border Services Agency telephone reporting sites.

The town of Goderich, incorporated in 1827, is noted for its magnificent heritage homes and natural elegance, enhanced by the unique layout of its octagonal town square. The town is home to the *Huron County Museum* and the 1842 *Huron Historic Gaol* and has a small *Marine Museum* near the south pier. There are three fine beaches connected by a boardwalk. The 215-m long *Menestung Bridge*, a former railway bridge across Maitland River, leads to three walking trails, and there is an exotic animal farm 15 km NE of town.

Goderich was voted "The Prettiest Town in Canada" in the *National Communities in Bloom* competition in 1998, judged on landscape architecture, environmental efforts, community involvement and vision for the future. In February 2000, Goderich was second only to the Irish town

of Castlecove as "The Prettiest Town in the World" in the international *Nations in Bloom* contest.

Goderich to Fishing Islands

Charts 2261, 2291, 2228

There is a clay bluff 15 to 34 m high along the shore from Goderich 3 miles north to **Wright Point** (43°48′N, 81°44′W). The bluff, 30 to 61 m back from the shoreline, is 15 to 18 m high from Wright Point for 4 miles north to Port Albert. The edge of the bluff is mostly lined with trees but the land beyond is cleared.

128 *Point Farms Provincial Park* is at Wright Point. The park has campsites but no small-craft facilities (1999).

Martin's Point and Quaid's Bay are 3.7 miles north of Wright Point.

Port Albert $(43^{\circ}53'N, 81^{\circ}43'W)$ is a small community at the mouth of **Nine Mile River**. The river entrance is closed by a dry **gravel bar**.

131 A clay bluff 30 m high rises close behind the shoreline from Port Albert northward to within 2 miles of Point Clark. Houses and barns are prominent among the few remaining trees on the farmland beyond the bluff.

There is a prominent grain **elevator** and two prominent **silos** one mile inland 1.3 miles NE of Port Albert.

The grain **elevator** and two **silos** 3.4 miles farther north at Amberley are also prominent. The elevator has an elevation of 72 m and has an air obstruction **light**.

Point Clark (44°04'N, 81°46'W), 12 miles north of Port Albert, is low and sandy with a few boulders near the shoreline. The land behind the point is thickly wooded. Point Clark, **Amberley Beach**, to the south, and **Lurgan Beach**, to the north, are lined with cottages.

Clark Reef, a boulder shoal 0.8 mile west of Point Clark, is marked by a buoy.



136 Point Clark light (782) is shown from the western tip of the point.

137 Point Clark Lighthouse National Historic Site includes the light structure. The former lightkeeper's house at Point Clark is a museum.





Lake Huron, St. Marys River, Lake Superior

Pine River Boat Club, close north of Point 138 Clark light, is a private facility with some sheltered wharves and a launching ramp. The small harbour here is difficult to enter without local knowledge. Fishing charters are available locally.

Caution. — A rock with a depth of 1.3 m lies 0.4 mile WNW of Point Clark light. A rock with a depth of 1.2 m lies 0.4 mile off Lurgan Beach.

Chart 2228

There is a Sarnia Vessel Traffic Services Zone calling-in point for upbound and downbound vessels WSW of Point Clark light. (Consult Radio Aids to Marine Navigation (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic) for more information.)

Charts 2261, 2291, 2228

The shore is low, sandy and boulder-strewn between Point Clark and Kincardine, 8 miles to the NE. There is a clay bluff 15 to 23 m high 0.1 to 0.3 mile inland. Farm buildings beyond the bluff stand out clearly from the lake. Bruce Beach, Poplar Beach and Boiler Beach are lined with cottages.



0.9 m.

Caution. — A rock 0.35 mile off Bruce Beach and a rock 0.2 mile off Boiler Beach have depths of

Tolmie Reef is 1.3 miles offshore and 3.5 miles NNE 143 of Point Clark.

There is a conspicuous red and white microwave 144 tower 0.6 mile inland of Bruce Beach and a similar tower 1.1 miles inland of Poplar Beach. Both towers have air obstruction lights.

Chart 2291

Kincardine


145 The municipality of **Kincardine**, population 12,000 (1999), is at the mouth of **Penetangore River** (44°11′N, 81°39'W). Kincardine has all the facilities of a busy resort town. There is a hospital and a small municipal airfield with scheduled and charter services.

A church spire and a water tower in the NE part of the town; a water tower on a hillside 1 mile east of the town; and a red and white microwave tower 1 mile NE of the harbour are prominent.

The harbour at Kincardine is a recreational harbour 147 administered by the Department of Fisheries and Oceans and managed by the municipality.

KINCARDINE (1998)



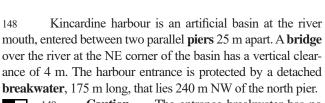

149 **Caution**. — The entrance breakwater has no lights and at high water levels may be partially submerged.

150 **Caution**. — A wave-baffle wall extends into the

150 **Caution.** — A wave-baffle wall extends into the entrance channel from the south pier.

151 **Caution**. — Moderate or strong **west winds** can cause **surging** in the harbour.

152 **Caution**. — The entrance channel is dredged periodically but depths in the channel and basin may be less than charted because of continual **silting** from the river.

153 *Kincardine sector light (783)* is near the west end of the north pier. The green sector shows north of the entrance. There is a user-activated **foghorn** at the light.

154 Kincardine light (784) is near the NE corner of the harbour.

155 *Kincardine Yacht Club* operates a clubhouse and marine museum in the lighthouse of *Kincardine light*.

156 Kincardine is a **Customs** vessel reporting station for pleasure craft.

157 Kincardine Yacht Club Marina is in the south part of the harbour. Ogg's Marine offers engine repairs and sales and service of outboard motors. Laundry facilities, propane, restaurants and shopping are nearby.

158 Rotary Park and Wildfang Scout Park, both on the river east of the bridge, have private **wharves** and **launching ramps** (1999).

Charts 2261, 2291

159 A **submerged water pipeline** 0.2 mile north of Kincardine north entrance pier extends 0.4 mile offshore; the intake **crib** at the outer end has a depth of 3.7 m.

There is a prominent red and white **radio tower** at Kincardine Hospital 1 mile NNE of the harbour; the tower has air obstruction **lights**.

Horton Point is 1 mile north of Kincardine. McRae Point is a low boulder point 4.8 miles further to the NNE. The shoreline for 2 miles north of Horton Point is sandy beach with occasional boulders. A shallow bank extends 0.5 mile offshore between the two points.

There are three prominent **silos** 1.8 miles SSE of McRae Point. A **radio tower** (*Chart 2291*), elevation 144 m, 1.6 miles SE of McRae Point is also prominent.

A **boulder**-strewn **bank** extends 0.3 mile offshore from McRae Point north for 1.7 miles to **Gunn Point**. Gunn Point is low and skirted with beaches.

Bay south of Gunn Point but there is no shelter from westerly winds.

165 **Caution.** — A **rock** 0.3 mile offshore 0.4 mile south of Gunn Point, on the south side of the anchorage, has a depth of 0.3 m.

166 Inverhuron Provincial Park is on Gunn Point. This is a day-use park with picnic areas and a **launching ramp** but no other small-craft facilities.

A submerged water pipeline 1 mile north of Gunn Point extends 0.5 mile offshore; the intake **crib** at the outer end has a depth of 11.3 m.

Chart 2291

The **Bruce Nuclear Power Development** is on **Douglas Point** and **Macpherson Point** (44°20′N, 81°35′W). The white **dome** of the reactor building and the **towers** of the heavy water plant are **conspicuous** from offshore. The tallest of the towers has an elevation of 145 m. The buildings can be seen for more than 30 miles on a clear day. The towers are illuminated and the complex is prominent at night.

169 Bruce Generating Station A is on Macpherson Point and Bruce Generating Station B is on Douglas Point. Each has a cooling water discharge channel to the lake. There are private **wharves** for inspection vessels. The plant grounds are restricted and no trespassing is allowed.

Submerged water intake and discharge pipelines extend WNW and NW from Douglas Point and Macpherson Point. There is a small **spoil area** 2 miles west of Point Douglas.

Baie du Doré lies between Macpherson Point and Scott Point, a low rocky point 1.5 miles to the NE. The bay is shallow and mostly foul with low stony shores. There is a small private wharf on the west side of Baie du Doré.

172 **Loscombe Bank** lies off Baie du Doré. The outer edge of the bank extends 2 miles west of Scott Point.

173 McRae Point open west of Douglas Point clears Loscombe Bank.

A shallow **bank** extends up to 1 mile offshore between Scott Point and **MacGregor Point**, 4.8 miles to the NE. The widest sections of this are **Welsh Bank**, 1 mile north of Scott Point, and **Scougall Bank**, 1 mile farther NE.

175 *MacGregor Point Provincial Park* has picnic areas and campsites. There are no small-craft facilities.

There are sandy beaches between MacGregor Point and Port Elgin, 3.6 miles to the ENE, but most of this coast is obstructed by **shoals**. These include **Belcher Reef**, **Boyer Reef**, **Malcolm Reef** and **Dack Spit**.

177 **Logie Rock**, marked by *Logie Rock light buoy VC2 (785)*, lies 2 miles WNW of Port Elgin.

Port Elgin

The harbour at **Port Elgin** $(44^{\circ}27'N, 81^{\circ}24'W)$ is an artificial basin enclosed by **breakwaters** and **moles** that give protection from all winds.

DOUGLAS POINT (1998)



179 Caution. — Moderate or strong west and NW winds may cause surging. Both entrance breakwaters are Y-shaped to reduce the surge effect in the basin.

The harbour at Port Elgin is a recreational harbour administered by the *Department of Fisheries and Oceans* and managed by the municipality.

A dredged entrance channel leads from deep water through the gap between the breakwaters. The channel is marked by **buoys**.

The preferred approach to the entrance channel passes north and east of Logie Rock.



183 Port Elgin range lights (786, 787) lead into the harbour entrance.

184 Port Elgin North Breakwater light (787.5) and Port Elgin South Breakwater light (787.7) are at the outer ends of the breakwaters.

Port Elgin, population 7,041 (1996), is a busy resort town 1.5 km east of the harbour. There is a small municipal airfield with charter services. Port Elgin has a medical centre but the nearest hospital is at Southampton.

Port Elgin water tower, elevation 75 m, and the sand beach south of the harbour make good landmarks. There is an aeronautical beacon 1.7 miles south of the harbour.



187 Port Elgin Harbour Centre is a municipal facility in the south part of the harbour. Port Elgin

Yacht Club is a private facility in the north part of the harbour. Redline Marine and Aqua Manufacturing & Marine are in Port Elgin.

Several private orange **buoys** are moored up to 1.5 miles west and SW of Port Elgin during the boating season. These buoys are used for regattas.

The shore is sandy but the waters are **foul** up to 0.4 mile offshore between Port Elgin and **McNab Point**, 1.8 miles to the NNE. **Boulders** lie close offshore north of McNab Point.

190 The **tower** of a discontinued light stands on McNab Point.

Microwave towers 1.1 and 2.5 miles ESE of McNab Point are prominent. Both towers have air obstruction **lights**.

192 **Chantry Island**, low, wooded and surrounded by boulders, lies 1 mile NNW of McNab Point. The **ruins** of a pier extend from its SE side. The island is a bird sanctuary.



193 *Chantry Island light (788)*, on the east side of the island, is shown from a **conspicuous** white **tower**.

A **boulder**-strewn **rock bank** extends 1 mile SW of Chantry Island. The outer end is marked by a **buoy** moored 1 mile west of McNab Point.

PORT ELGIN (1998)



Chart 2292

Approaches to Southampton

195 Chantry Island is joined to the mainland by a **shoal**. Depths of 11 feet (3.4 m) can be found over the shoal but local knowledge is required. This area has a **rock** bottom with many **boulders** and is not suitable for anchorage.

Breakwaters were built from the NE part of Chantry Island and the mainland shore to provide a harbour of refuge.

197 **Caution.** — These breakwaters are in **ruins** and offer no protection. They are not visible at normal water levels and are a hazard to navigation. There is a passage 450 feet (137 m) wide with depths of 13 feet (4 m) between the two structures; it is marked by two **buoys**.

198 **Anchorage** for small vessels can be found in depths of 20 feet (6.1 m) close south of the west breakwater.

The **ruins** of a former railway pier extend from the mainland shore 0.1 mile south of the east breakwater.

200 **Chantry Shoal** extends 1 mile SW, 0.5 mile west and 1 mile north of Chantry Island. **Lambert Shoal** is east of the northern part of Chantry Shoal and 0.6 mile WNW of Saugeen River entrance. **Lee Bank** (44°31′N, 81°22′W) is 0.4 mile NNE of Lambert Shoal.

The NE end of Chantry Shoal is marked by *Southampton light buoy VJ2 (793)*; the southern end of Lambert Shoal is marked by *Saugeen River Turning light buoy VJ3 (792)*; and the south end of Lee Bank is marked by bifurcation buoy *VJ*.

The usual entrance route to Southampton, approaching from south or west, passes around the north end of Chantry Shoal with *Southampton light buoy* to starboard. The route continues southward to pass close west of *Saugeen River Turning light buoy* and then makes a sharp turn onto the line of the range.

Southampton

The town of **Southampton** (44°30′N, 81°22′W), population 3,151 (1996), is 1 mile ENE of Chantry Island on the south side of the mouth of the **Saugeen River**. Southampton has churches, stores, bank, hospital, doctors, dentists, veterinarian, motels, hotels, liquor and beer store, post office, restaurants, laundromats, golf, tennis and *Bruce County Museum*.

The town has a **conspicuous** blue **water tank** with a dome-shaped top, 58 m high. There is a prominent flagpole in a lakefront park south of the harbour.

The north side of the harbour entrance, at the mouth of Saugeen River, is protected by a concrete **pier**. There is a

SOUTHAMPTON (1998)




rubble **breakwater**, marked with a privately maintained **light**, protecting the south side. The structures extend 400 feet (122 m) offshore.

An entrance channel 200 feet (61 m) wide, marked by **buoys** and a **lighted range**, leads into the river mouth.



207 **Caution**. — Strong **west or NW winds** make the entrance channel unsafe.



209 The **pier** and most of the **wharf** on the south side of the harbour have depths greater than 9 feet (2.7 m) (1995). The easternmost 100 feet (30 m) of the wharf is shallow. The pier has an elevation of 4 feet (1.2 m). Facilities include public washrooms and a pay phone. Fishing vessels and pleasure craft use the wharf.

A **bridge** across the river 0.2 mile from the entrance has a vertical clearance of 29 feet (8.8 m). An **overhead power cable** 0.1 mile east of the bridge has a clearance of 44.9 feet (13.7 m). An **overhead power cable** 0.2 mile above the bridge has a clearance of 45.9 feet (14 m).



211 **Caution.** — **Westerly winds** cause strong **surging** in the river entrance. Craft whose draught and

overhead dimensions so permit are advised to berth upstream of the bridge.

The shore is mostly boulder beach with small patches of sand from Southampton to **Frenchman Point**, low and boulder-covered, 6.5 miles to the NE. There is a shallow **bank** up to 0.5 mile wide from Southampton to south of **Frenchman Bay**. A boulder beach extends 0.5 mile NE of Frenchman Point. **Sauble Beach**, a clean sand beach that contrasts distinctly with the coast to the north and south, forms the shore from here to the mouth of the Sauble River, 4 miles farther north. There is a **sandbank** 0.5 mile wide with depths of less than 18 feet (5.5 m) off Sauble Beach.

Sauble River

Sauble River $(44^{\circ}40'N, 81^{\circ}17'W)$ entrance is protected on its north side by a **rock spit** and on its south side by a substantial **boulder breakwater**. With local knowledge, Sauble River can be navigated as far as **Sauble Falls** 1 mile upstream.

The entrance channel is subject to **silting** but is dredged periodically. Depths of less than 3 feet (0.9 m) were reported in 1999.

There is a **speed limit** on Sauble River from Lake Huron to Sauble Falls (see Vessel Operation Restriction Regulations for details).

SAUBLE RIVER (1991)



The community of **Sauble Beach** extends southwards along the shore from the river mouth and is a popular summer resort with a magnificent sand beach. Sauble Beach has churches, several stores, banking, motels, hotels, medical clinic, doctors, post office, veterinarian, restaurants, service stations, liquor and beer store, golf and tennis.

Sauble Beach is a **Customs** vessel reporting station for pleasure craft.

220 Kit-Wat Motel Marina Restaurant is on the south shore of Sauble River 0.5 mile from the river entrance. There is a Municipal launching ramp near by. Sauble River Marina is 0.1 mile farther east.

Fishing Islands

221 **Chiefs Point** (44°42′N, 81°18′W) is a low shelving point 2 miles NNW of Sauble River. **Fishing Islands** is a group of low wooded islands extending 10 miles NNW from Chiefs Point. Fishing Islands were part of a First Nations Reserve but many of the islands are now privately owned.

Main Station Island, 3 miles north of Chiefs Point, was the most important fishing station on Lake Huron more than 100 years ago. The remains of the first stone house built in this area can still be seen on the island.

Fishing Islands lie on a shallow **reef-filled bank** with depths less than 18 feet (5.5 m). The bank extends 3 miles from the mainland shore. Narrow channels suitable only for small craft lead through the islands and reefs to anchorages and to the communities of Oliphant, Red Bay, Howdenvale and Pike Bay.

Cape Hurd, 37 miles to the NW, should stay outside the 20-m contour unless sure of their position.

225 **Caution**. — **Fishing nets** are frequently set in this area.

Approaches to Oliphant

The small farming community and summer resort of **Oliphant** (44°44′N, 81°17′W) is 2.5 miles NNE of Chiefs Point.

Lonely Island, also known as Lonely Point, is 1 mile south of Oliphant. It is connected to the shore by a sandy beach that is submerged at high water levels. **Chiefs Point Bay** is shallow and **foul**.

228 **Cranberry Island**, west of Oliphant, is the largest of a group of low wooded islands separated from the mainland by water only 1 foot (0.3 m) deep. This group includes **Whisky Island**, **Smokehouse Island**, **Indian Island**, **Bowes**

OLIPHANT (1998)



Island and Main Station Island. Indian Island is connected to Cranberry Island at low water levels.

- 229 **Cigar Island** is west of Lonely Island. **Vimy Island** and **Whitefish Island** lie west of Cigar Island.
- A submerged power cable crosses between Hawks Nest Point and Whisky Island. Another submerged power cable crosses from Whiskey Island to Lonely Island. A submerged power cable crosses from the mainland shore to the NE point of Cranberry Island and then on to Indian Island. Other cables are laid from there to Bowes Island and the small islands to the south.
- The **approach channel** to Oliphant is entered between Whitefish Island and a **shoal** to the south, marked by a **buoy**.
- 232 **Caution**. The sea breaks with great force over this shoal in strong **westerly winds**.
- 233 The approach channel has depths of 10 feet (3 m) to a position east of Whitefish Island, where **anchorage** can be found in depths of 14 to 16 feet (4.3 to 4.9 m), mud and sand bottom.
- 234 **Caution**. The shelter at Whitefish Island anchorage is good but **westerly winds** can cause **surging**.

- The bottom is mostly sand from the anchorage to Oliphant. The channel from Smokehouse Island to the wharf at Oliphant is reported to be dredged periodically and has depths of 3 feet (0.9 m) (1994).
- 236 Oliphant range lights (794, 795) lead through the dredged channel. The Oliphant range lights are reported to be visible only on the range.
- The harbour at Oliphant is a recreational harbour administered by the *Department of Fisheries and Oceans* and managed by the municipality.
- 238 The **Public wharf** at Oliphant is at the outer end of a **causeway**. The wharf is L-shaped with an outer face 84 feet (26 m) long and has depths of 4 to 8 feet (1.1 to 2.3 m) (1994). Commercial fishing boats use the wharf.
- 239 Murdoch McKenzie Marine Service is in a protected area on the north side of the causeway leading to the Public wharf. This marina also provides barge service to the islands.
- The nearest medical and other facilities are at Wiarton, 12 km to the east by paved road.

Lake Huron — East shore

Oliphant to Red Bay and Pike Bay

The shore is low and bordered by sand, boulders and rushes between Oliphant and Indian Point, 3 miles to the north.

242 Burke Island (44°46′N, 81°19′W) lies 2 miles NNW of Oliphant. Scout Reef, 1.2 miles SW of Burke Island, is a bare rock 5 feet (1.5 m) high. An extensive area of shoals lies south and east of Scout Reef. Deadman's Island is near the NE end of an extensive boulder shoal between Burke Island and Scout Reef. Scotch Bonnet Island is 0.7 mile SE of Scout Reef.

243 **Anchorage** can be found SE of Burke Island. Ĵ A channel with depths of 9 feet (2.7 m) leads to the anchorage. The channel passes well south of the shoals around Scout Reef and north of the shoal area around Scotch Bonnet Island.

Caution. — A detached rock close east of 244 the channel 0.2 mile west of Main Station Island has a depth of 6 feet (1.8 m).

245 **Little Red Bay** is 2.5 miles north of Oliphant.



Little Red Bay Marina, at Evergreen Lodge, is on the SE shore of Little Red Bay.

Red Bay is 4.5 miles north of Oliphant. Red Bay 247 has a church, a small store, and a fine sandy beach. There is a concrete pier 9 feet (2.7 m) wide and 450 feet (137 m) long with an elevation of 5 feet (1.5 m) at Red Bay. This pier offers no shelter or berthing and the area around the pier is dry at chart datum (1996).

248 Howdenvale, 1 mile NNW of Red Bay, has an L-shaped Public wharf 168 feet (51 m) long and 16 feet (4.9 m) wide with depths of 1 to 5 feet (0.3 to 1.5 m) (1995) was in ruins in 2019. There is a concrete **launching** ramp on each side of this wharf and there are several private wharves around the shores of the bay.



Caution. — SW winds cause surging at the Howdenvale Public wharf.

Approach channels

There are three routes to Red Bay and Howdenvale: from Burke Island anchorage; from the lake through Beament Island passage; and from the lake through Drake Shoal passage.

251 The 6-foot (1.8-m) deep channel from Burke Island anchorage leads north between Indian Point and Corsdu Reef, then west of Reid Point into Red Bay. McCallum Island, 1 mile west of Reid Point, is at the end of a rock reef that extends 1.1 miles to the NNE. Depths of 9 feet (2.7 m) are found from Red Bay to Howdenvale and SW and west of **Tyson Island**, and 7 feet (2.1 m) around the north side of Tyson Island to the wharf.



Caution. — Three dangerous rocks in the east half of the channel near Indian Point have depths of less than 6 feet (1.8 m).



Anchorage can be found west of Tyson Island but the bay east of the island is shoal and filled with rocks.

255 A narrow passage between Beament Island and Cavalier Island, known locally as Beament Island Passage, is marked at the lake end by a **buoy**. There are depths of 7.3 m from the lake to a position north of Beament Island and depths of 7 feet (2.1 m) from NE of Beament Island to Howdenvale but **rocks** submerged less than 6 feet (1.8 m) lie close to the track on both sides. Local knowledge is required.

Drake Shoal is 2.5 miles west of Howdenvale at the southern end of a large area of reefs which include Chimney Reefs, Harrison Shoal and Hattie Rock. Ghegheto Island, known locally as Round Island, lies 0.8 mile SE of Drake Shoal.

257 Beament Island open west of Cavalier Island leads clear of the dangers described above.

A passage 450 feet (137 m) wide, known locally as Drake Shoal Passage, leads between Drake Shoal and the reefs extending from Ghegheto Island. The route to Howdenvale preferred by local fishermen leads through Drake Shoal passage then through the reefs between Ghegheto Island and St. Jean Point. This route is reported to be better than Beament Island passage in bad weather but local knowledge is necessary.

An extensive anchorage area inside Ghegheto 259 Island and Chimney Reefs offers some shelter. Depths are generally more than 18 feet (5.5 m) but there are many rock shoals with depths of 10 to 15 feet (3 to 4.6 m).

Pike Point $(44^{\circ}52'N, 81^{\circ}20'W)$ is 4.4 miles NNW 260 of Red Bay and 8.5 miles NNW of Oliphant.

Barrett Reef, awash and marked by a buoy, is 1.3 miles west of Pike Point. Kolfage Island is 0.5 mile south of Pike Point. Both are joined to Pike Point by impassable reefs.

262 **Pike Bay** is a sheltered inlet east of Pike Point.

Pike Bay can be approached from the lake either 263 through Drake Shoal passage, described above, or by a passage with depths of 6 feet (1.8 m) entered south of Barrett Reef.

The outer part of the latter passage is marked by a buoy and by a daymark range on Kolfage Island. The red and white triangular-shaped daymarks in line bearing 097° lead close west of Kolfage Island. The passage around the west and south sides of Kolfage Island is not recommended without local knowledge.

There is a **daymark range** at the head of Pike Bay. The red and white daymarks in line bearing 018° lead into the bay.

HOWDENVALE BAY (1998)



266 **Caution.** — **Rocks** with depths of 2 and 4 feet (0.6 and 1.3 m) lie on the range line into Pike Bay; other **rocks** lie near the range line.

The community of Pike Bay has a motel, snack bar, general store and a gasoline station.



268 Anchor's Landing Marina is on the SE shore of Pike Bay.

269 By the Bay Pike Bay Resort, NE of Anchor's Landing Marina, is a campground open all year.

Fishing Islands to Cape Hurd

270 **Caution.** — **Reefs** extend offshore for up to 2 miles from Pike Bay past Lyal Island to Bradley Harbour, 11 miles to the NNW. Mariners should stay outside the 10-fathom (18-m) contour.

Milton Bank (44°52′N, 81°23′W) is 2 miles west of Pike Point. Wells Shoal and Lincoln Shoal lie west of Purgatory Cove. Murton Reef and Lyal Reef are NW of Lincoln Shoal.



272 **Caution**. — A **submerged power cable** crosses the mouth of Purgatory Cove.

Lyal Island (44°57′N, 81°24′W) is wooded. **Greenough Point** is on the mainland NNW of Lyal Island.

Wanderer Shoal, Ripple Reef, Saturn Rock, Seashell Rock and Cornet Ground are SW and west of Lyal Island.



274 Lyal Island light (796) is on the west side of the island.

There is a **microwave tower** (not shown on the chart), elevation 300 feet (91 m), 5 miles NE of Lyal Island light. This tower has air obstruction **lights**.

Little Pike Bay is entered, with local knowledge, through a passage between Lincoln Shoal and Murton Reef. The entrance channel, with depths of 11 feet (3.4 m), is narrow and crooked with a sharp turn past the narrow point on the south side of the entrance. There is a white **skeleton tower** near the end of this point but it is lower than the surrounding trees (1988).

A submerged power cable crosses the bay.

Little Pike Point is the SE entrance to the large bay SE of Lyal Island. The bay is shallow and **foul** except for a central lane of deep water.

Parker Landing is in the shelter of Parker Island in the NE part of this bay. Parker Landing has a municipal launching ramp and a Public wharf 40 feet (12 m) long and 6 feet (1.8 m) wide with an elevation of 4 feet (1.2 m). There are depths of 1 to 2 feet (0.3 to 0.6 m) (1992).

STOKES BAY (1998)



280 Lakeside Park is a family campground near the Parker Landing wharf.

Shute Point, 1 mile NE of Lyal Island, is prominent because of its dark colour.

282 **Old Woman's River**, 40 feet (12 m) wide at its mouth, is east of Shute Point. The river offers sheltered **anchorage** for small boats but local knowledge is required.

Myles Bay, between Shute Point and Old Woman's River, has a municipal park with floating wharves and a swimming area.

Stokes Bay

284 **Stokes Bay** (44°59′N, 81°23′W), entered between Lyal Island and Greenough Point, offers sheltered **anchorage** for small vessels in the outer part and for small craft further up the bay.

285 **Caution**. — Certain wind conditions can cause the **water level** to vary as much as 3 feet(0.9 m) in 3 hours.

286 The entrance channel, with depths of 16 feet (4.9 m), passes north of Saturn Rock, Seashell Rock and Ripple Reef, and south of Cornet Ground and **Mad Reef**, which is bare, to an **anchorage** area north of Lyal Island.

The channel is marked by *Stokes Bay Entrance light buoy VK2 (796.3)* and by other **buoys**. The channel south of Mad Reef is 900 feet (274 m) wide.

287 Stokes Bay range lights (797, 798) lead to within 0.4 mile of the most westerly of the **Knife Islands**. The rear light is on Shute Point.

288 Offshore **reefs** shelter areas north of Lyal Island and east of Mad Reef. With care, **anchorage** in 3.7 to 11 m can be found with protection from any particular wind.

The usual route to the anchorage begins on the *Stokes Bay range* outside the 20-m contour. The route follows the range until Mad Reef bears less than 320°, then turns northward to the deepest anchorage.

290 Small craft can find **anchorage** between **McMaster Point** on Lyal Island and **Dane Island** to the SSE. There are depths of 6 feet (1.8 m) in the approaches. Small craft can also find **anchorage** between Garden and Tamarack Islands in depths of 12 feet (3.7 m).

291 The **Public wharf** at Stokes Bay is on the NW shore of the bay at the outer end of a **causeway**. The wharf is 155 feet (47 m) long and 24 feet (7.3 m) wide with an elevation of 5 feet (1.5 m). The outer part of the wharf is 44 feet (13.4 m) wide. There are depths of 5 to 7 feet (1.5 to 2.1 m) around the outer part of the wharf, 4 to 6 feet (1.2 to

1.8 m) along the SW face, and 4 to 5 feet (1.2 to 1.5 m) along the NE face (1992). There is a Harbour Manager.

A channel leads from west of Knife Islands between **Garden Island** and **Tamarack Island** to the Public wharf. The channel has depths of 7 to 9 feet (2.1 to 2.7 m) in its northern part and is marked by **buoys**.



293 **Caution**. — The channel to the Public wharf is hazardous at night.

The community of Stokes Bay, at the mouth of the **Stokes River**, has a church, community centre, restaurant, general store and post office.



295 Stokes Bay Camp and Marina, a cottage resort and marina on the NE shore of Stokes Bay, has a post

296 **Irish Harbour**, 0.5 mile north of Shute Point, is reported to offer secluded **anchorage** for small craft. The harbour, approached around the south and east sides of Knife Islands, has a blue clay bottom that rises gently from 11 feet (3.4 m) in the entrance to weedy shallows at the head of the bay.

Gauley Bay, west of Ferguson Point, is foul.

An overhead telephone cable and a submerged power line cross the mouth of Gauley Bay.

Stokes Bay to Cape Hurd

Greenough Bank, 2.4 miles NW of Lyal Island, has rocks awash up to 1 mile offshore. There is a narrow channel with depths of 20 feet (6.1 m) between Greenough Bank and the shore. Local knowledge is required to transit this channel.

Greenough Harbour (44°59′N, 81°26′W) offers excellent sheltered **anchorage** for small craft. The entrance has depths of 6 feet (1.8 m) along the NW side of **Simon Point**. The preferred approach is from the south, following *Stokes Bay range* to a position abreast of Ripple Reef, then steering north until past Simon Point.

Anchorage can be found in the inner part of Greenough Harbour in 2 to 4 feet (0.6 to 1.2 m), mud bottom. Shoal **rocks** have been reported in the entrance to the inner harbour.

302 **Scotch Thistle Point** is not prominent.

Bradley Harbour, 2.3 miles NNW of Greenough Harbour, is **foul** and suitable only for small boats. Depths of 24 feet (7.3 m) and less are found up to 2.4 miles offshore between Bradley Harbour and **Pleasant Point**, 1.6 miles to the NW.

The entrance to the inner part of **Pleasant Harbour** is very shallow. Pleasant Harbour is suitable only for small boats.

305 **Little Pine Tree Harbour** $(45^{\circ}03'N, 81^{\circ}29'W)$ is the best protected of the small harbours in the area. It offers limited **anchorage** with depths of 5 feet (1.5 m). The entrance is 200 feet (61 m) wide with a depth

of 6 feet (1.8 m). There is a **rock** submerged less than 6 feet (1.8 m) in the middle of the harbour.

Juno Point and Sibert Point are between Little Pine Tree Harbour and Pine Tree Harbour.



Pine Tree Harbour $(45^{\circ}04'N, 81^{\circ}30'W)$ offers anchorage for small craft in depths of 10 feet (3 m).



308 *Pine Tree Harbour range lights (798.5, 798.6)* lead towards the harbour.



309 **Caution**. — **Gilphie Reef** lies 0.5 mile offshore on the line of *Pine Tree Harbour range*.

The entrance into Pine Tree Harbour, between **Zinkan Island** and **Pine Tree Point**, is marked by **buoys**.

The harbour should not be attempted in bad weather because waves will probably break on Gilphie Reef. It is possible with local knowledge to pass around the reef and into the entrance.

Three submerged **cribs** on the NW side of Pine Tree Harbour are reported to be marked by private **buoys** (1988). Other submerged **cribs** in the harbour are not marked.

A **submerged cable** (not marked on the chart) crosses the inner end of Pine Tree Harbour close east of an islet near the north shore.

Johnston's (Johnston) Harbour $(45^{\circ}07'N, 81^{\circ}33'W)$ is 3.5 miles NNW of Pine Tree Harbour. There is an outer bay, entered between **Terry Point** and **Johnston's** (**Johnston**) **Point**, and a small inner cove, well sheltered but shallow, lying NW of the head of the outer bay. The peninsula lying parallel to the NW side of the harbour is an island at high water levels. **Shoals** on the SE side of Johnston's Point extend 0.1 mile offshore.

The usual approach to Johnston's Harbour is from the SW and passes south of **Huntress Reef**, staying in midchannel until near the head of the bay. The inner cove is entered through a narrow channel that is reported to lead between five **cribs**, some of which are marked by private **buoys** (1988).

Anchorage can be found in the outer part of Johnston's Harbour but this is exposed to south and SW winds. It is reported that **anchorage** can be found in the inner cove in 2 feet (0.6 m) of water over weed and mud bottom.

Point, is low. The SW end is a spit of dry boulders. The small peninsula at the outer end of Porcupine Point is wooded with bushes and low trees and is an island at high water levels.

Corisande Bay, SE of Porcupine Point, is foul. Porcupine Reef extends almost to Cataract Rock, 0.8 mile WSW of Porcupine Point. Eagle Point is 1 mile NNW of Porcupine Point. The outer part of Campbell Reef lies 1.4 miles WSW of Eagle Point.

There is a Canadian Coast Guard **radio tower** 4.2 miles east of Eagle Point.

PINE TREE HARBOUR (1998)



320 **Little Eagle Harbour** (45°09′N, 81°35′W), on the NW side of **Coal Oil Point**, offers sheltered **anchorage** for small craft but there is no protection from SW winds. There are depths of 18 feet (5.5 m) in the entrance. A **rock** 0.4 mile SW of Coal Oil Point has a depth of less than 6 feet (1.8 m). The usual entrance follows a course of 060° with Coal Oil Point as a lead mark, then passes close NW of the point.

- Dorcas Bay, 1.5 miles north of Eagle Point on the east side of **Pendall (Penaall) Point**, is **foul**. **Eagle Harbour**, to the west, is very shallow and **foul**.
- Warner Point, 1 mile west of Pendall Point, consists of limestone gravel and stones piled nearly 10 feet (3 m) high.
- 323 **Warner Bay** offers **anchorage** in 3 to 5.5 to 7.3 m, sand and mud. **Youell Island** is on the north side of the approach to the anchorage.
- Hopkins Point $(45^{\circ}11'N, 81^{\circ}40'W)$ lies on the south side of Hopkins Bay; a shoal spit extends 1 mile SSW of the point. Isolated shoals 1 mile west and 2.1 miles WSW of Hopkins Point have depths of 5.8 and 7.3 m.
- 325 There is an **anchorage** in the NE part of Hopkins Bay but a 13-foot (4-m) bar obstructs the approach. There are **shoal rocks** in the SW part of the bay.

Chart 2274

Baptist Island (45°12′N, 81°42′W), off the north entrance point to Hopkins Bay, is prominent from the north. Baptist Rock, Arbutus Rock and several unnamed rocks lie south and west of Baptist Island.

Baptist Harbour, entered 0.7 mile north of Baptist Island, offers small craft **anchorage** with good shelter except from SW winds. The narrow entrance has depths of 6 feet (1.8 m) and anchorage in the harbour can be found in depths of 2 to 5 feet (0.6 to 1.5 m).

Cape Hurd (45°13'N, 81°44'W), the west point of Bruce Peninsula, is low and flat and covered with tall poplars and pine trees.

329 Cape Hurd light (799) is on the outer part of the point. The light is visible on bearings of 357° through north, east and south to 222°.

330 (The entrance to Georgian Bay and the areas NE of Cape Hurd are described in Sailing Directions booklet CEN 306 — Georgian Bay.)

Lake Huron — North Shore


General

Chart 2200

- This chapter covers the south coasts of Manitoulin Island, Cockburn Island and Drummond Island. These three large islands form the north shore of the main part of Lake Huron. Also included is a brief description of the islands in the entrance to Georgian Bay.
- 2 (The islands, channels and dangers in the entrance to Georgian Bay are described in Sailing Directions booklet CEN 306 Georgian Bay.)

[From U.S. Coast Pilot 6, Chapter 10, partial]

- 2.1 **Caution**. A special use airspace, bounded by the following coordinates,
- 2.2 45°17′00″N., 83°00′00″W.;
- 2.3 45°20′24″N., 82°31′18″W.;
- 2.4 44°31′00″N., 82°19′54″W.;
- 2.5 44°27'42"N., 82°47'08"W.;
- 2.6 is used periodically for air to air gunnery practice from the surface to an altitude of 45,000 feet [13,720 m] from sunrise to sunset. The using agency is the Commander, Permanent Field Training Site Detachment, Phelps-Collins ANGB, Alpena, MI, and the controlling agency is Minneapolis ARTC Center, Federal Aviation Administration.
- Most of the Canadian charts referred to in this chapter are based on modern surveys carried out between 1953 and 1981. *Charts* 2297 and 2298, however, are based largely on lead line surveys carried out much earlier but incorporate any dangers discovered during more recent echo-sounder surveys.
- Depths and elevations quoted in this chapter refer to chart datum (see Sailing Directions booklet CEN 300 General Information, Great Lakes) and thus agree with charted values. Because Charts 2297 and 2298 are based on an older water level datum, depths and elevations on these charts must be corrected to refer them to the presently adopted datum for Lake Huron. The required correction is noted on the chart. (More information on the older water level datums is given in Sailing Directions booklet CEN 300 General Information, Great Lakes.)
- 5 Sarnia Vessel Traffic Services (VTS) Zone covers Canadian waters from Long Point light in Lake Erie to the

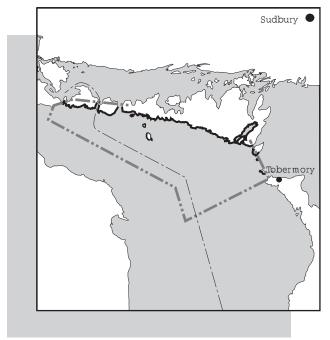

south end of Detour Passage, in Lake Huron. Information on this system is given in *Radio Aids to Marine Navigation* (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic); visit https://www.ccg-gcc.gc.ca/publications/index-eng.html#mcts.

- 6 Upbound and downbound sailing courses and limits recommended by the *Lake Carriers Association* and the *Canadian Shipowners Association (see Sailing Directions booklet CEN 300 General Information, Great Lakes)* are shown on the charts.
- 6.1 **Light buoy**. An *Ocean Data Acquisition System* (*ODAS*) meteorological light buoy, marked 45003, is moored in mid-lake 45 miles west of Tobermory.

Entrance channels

Chart 2235

- 7 The principal islands in the entrance to Georgian Bay are Fitzwilliam Island, Yeo Island, Lucas Island, Cove Island and Russel Island.
- 8 (These islands and other dangers in the entrance to Georgian Bay are described more fully in Sailing Directions booklet CEN 306 Georgian Bay.)
- 9 **Fitzwilliam Island** (45°30′N, 81°45′W), lying on the north side of the entrance to Georgian Bay, rises to a height of 160 feet (49 m) near its NE end.
- 10 **Yeo Island**, 2 miles south of Fitzwilliam Island, has two summits, each 100 feet (30 m) high. The NE summit, which is known as **Black Summit**, has steep slopes descending to the water. The north shore of the island is steep-to and has sea caves at lake level. The west shore is indented by two coves offering some shelter for small craft.
- Lucas Island, 0.7 mile SE of Yeo Island, is 100 feet (30 m) high.
- 12 Lucas Island light (804) is on the north side of the island. It is visible on bearings of 040° through east and south to 229°.
- Cove Island $(45^{\circ}18'N, 81^{\circ}44'W)$ lies on the south side of the entrance to Georgian Bay. **Russel Island**, 1 mile SE of Cove Island, is a high island with a steep rocky coastline; it is thickly wooded with the tree line extending down to the shore.
- Gig Point $(45^{\circ}20'N, 81^{\circ}44'W)$ is the north end of Cove Island.
- ****.
- 15 Cove Island light (805) is on Gig Point. There are two red and white **radio towers** near the light.
- 17 West Sister Shoal light buoy J2 (802.5) marks the north side of the shoal.

Manitoulin Island

- Manitoulin Island extends from Georgian Bay across two-thirds of the northern end of Lake Huron. North Channel separates what is said to be the largest "fresh water" island in the world from the north mainland shore. The island is mostly limestone tablelands tilted towards the SW or south. The southern or Lake Huron coast extends from Owen Channel entrance on Georgian Bay WNW for 62 miles to Mississagi Strait. Nearly all of this coast is low, rocky and boulder-strewn.
- 19 (North Channel is described in Sailing Directions booklet CEN 307 North Channel of Lake Huron.)
- The principal towns and ports on Manitoulin Island are Little Current and Gore Bay, both on North Channel. South Baymouth and Providence Bay are the only settlements on the Lake Huron coast with any facilities for small craft.

Charts 2235, 2298

Hungerford Point to Providence Bay

- Hungerford Point $(45^{\circ}31'N, 81^{\circ}51'W)$, the south end of Manitoulin Island and the NW entrance point of Owen Channel, can be identified by its small white stony beaches. Scattered stones and shallow water west of the point extend 0.4 mile offshore.
- 22 (The coast of Manitoulin Island NE of Hungerford Point is described in Sailing Directions booklet CEN 306—Georgian Bay.)
- The shore is low from Hungerford Point to **Thomas Bay**, 4 miles to the NW. **Boulders** and **shoals** lie close in; **Vigilant Rock** and **Grantham Shoal** extend 1 mile offshore.
- The entrance to Thomas Bay is obstructed by **Todman Reef** and **shoal spits** extending WSW from **Mayflower Island** and by a **shoal spit** extending from the west entrance point of the bay. A detached **rock** lies 0.3 mile SSW of Todman Reef.
- 25 Caution. A shoal spit reaching 0.4 mile south of **Thomas Point** is a **danger** to vessels approaching from SW.
- 26 Anchorage with excellent shelter from all but southerly winds can be found in Thomas Bay. The preferred entrance is west of Todman Reef.
- McGaw Point, 2.5 miles WNW of Thomas Point, is the south side of the entrance to South Bay.

Chart 2273

The community of **South Baymouth** $(45^{\circ}33'N, 82^{\circ}01'W)$ is north of McGaw Point on the NW side of the entrance to South Bay. The community has a general store, post office, restaurant, motel, liquor store, pay phone and gasoline. There is a **ferry terminal**, a **Public**

SOUTH BAYMOUTH (1998)



wharf and a small launching ramp. Manitowaning, 22 km to the NE, is the nearest business centre. There is a hospital in Mindemoya, 33 km to the NW.

- The entrance channel, marked by **buoys**, passes between shallow water extending from McGaw Point to the east and **Inkster Rock** and **Scotchie Reef** to the west.
- Wallace Rock is the outermost danger in the approach to South Baymouth.
- 31 South Baymouth light buoy JS2 (806) is SW of Wallace Rock on the line of South Baymouth range. Inkster Rock light buoy JS5 (806.5) lies ESE of Inkster Rock and McGaw Point light buoy JS8 (806.7) is NW of McGaw Point.
- 32 South Baymouth range lights (807, 808) lead part way through the entrance channel. There is a user-activated **foghorn** at the front range light.
- 33 A **current** sets out of South Bay except during strong onshore winds.
- During the summer months a passenger and vehicle **ferry** runs between South Baymouth and Tobermory. (*Further information on the ferry is given in the description of Tobermory in Sailing Directions booklet CEN 306 Georgian Bay.)*
- Two privately maintained **lights** indicate the NE and SW ends of the ferry terminal.



36 South Bay Marina is at the head of a small-craft basin, entered SW of the ferry terminal.

South Bay

- South Bay extends 13 miles NE from South Baymouth. The bay consists of two parts joined by **The Narrows. McKim Bay, Frood's Harbour (Froude Bay)** and **Leason Bay** are on the NW shore of the southern part.
- 38 The **wharf** and buildings of an *Ontario Ministry of Natural Resources* base are at McKim Bay. The wharf is marked by a private white **light** and has depths of 2 feet (0.6 m) (1987). The base has red and white **radio towers** that are visible from South Bay.
- 39 The SW part of South Bay offers excellent anchorage in depths of 5 to 7 fathoms (9.1 to 12.8 m), mud bottom. It is reported that small craft can find good shelter in Frood's Harbour.
- 40 Caution. A submerged power cable crosses the middle of Frood's Harbour.
- A high, well wooded limestone cliff forms the east shore of the NE part of South Bay from **Roberts Bay** to the site of a First Nations village 5 miles to the NE.
- 42 A **church spire** at the First Nations village is prominent.

- 43 **Glycerine Rock** is a detached **boulder shoal** 0.6 mile off the First Nations village.
- The land beyond the west shore of South Bay rises gradually to a bare limestone cliff, 300 feet (91 m) high in places, one mile inland. Named features on the west shore of the NE part of South Bay are **Sims Bay**, **Sims Island**, **Leask Point**, **Leask Bay** and **Charlton Bay**.

South Baymouth to Providence Bay

- The outlying **dangers** between South Baymouth and **Walker Point**, 2.5 miles to the west, are **Volunteer Spit**, which extends 0.7 mile offshore, and **Red Dan Rock**.
- 46 **Birch Point** is not prominent. Many dry **rocks** and **rocks awash** extend south and SW from Walker Point. A prominent small island is west of the point.
- 47 **Genesta Bank** lies 1 mile WNW of Walker Point in the mouth of a bay that is filled with **reefs** and **shoals**. There are several detached **shoal** patches in this area. The outermost is a 28-foot (8.5-m) patch 0.8 mile south of Genesta Bank.

Charts 2266, 2298

- 48 **Michael's Point (Michael Point)** (45°35′N, 82°08′W) is 2.6 miles WNW of Walker Point. A thickly wooded **islet** and groups of dry **rocks** lie west of Michael's Point and a **rock spit** extends 0.7 mile to the west. **Advance Reef**, an extensive **rock shoal** just separated from the spit, has a spot that is dry 0.8 m.
- Michael's Bay (Michael Bay), which lies between Michael's Point and Hammond Point, has a clean sand beach at its head. Chisholm Shoal is the main danger in this bay.

 Two cribs awash lie close to the porth shore of
- Two **cribs awash** lie close to the north shore of Michael's Bay.
- 51 The best **anchorage** is found east and SE of Chisholm Shoal, clay or sand bottom. There is no shelter from westerly winds.
- The coast is low and wooded from Hammond Point to **Jenkins Point** (45°37′N, 82°12′W), 3 miles to the NW. A shallow **bank** up to 0.5 mile wide and isolated **shoal** patches lie offshore. The outermost shoal is 2.2 miles SSW of Jenkins Point. **Carter Bay** has a mostly **sandy shore** that is **conspicuous** from offshore. **Rathbun Bay** is shallow and **foul**. **Hughson Bay** is north of Jenkins Point.
- Buckeye Shoal and Timber Bay Shoal lie 0.8 mile south and 1.5 miles WNW of Jenkins Point.
- 54 **Timber Bay**, 1.5 miles NW of Jenkins Point, has two **islets** close off its east shore; two dry **rocks** lie west of the northern islet. Small craft can find **anchorage** in Timber Bay SE of **Dewar's Creek**.
- Providence Point $(45^{\circ}39'N, 82^{\circ}17'W)$ is 6 m high and bluff. Providence Bay is entered NW of the point.

A shallow bank up to 0.6 mile wide lies along the shore between Timber Bay and Providence Point. **Everett Reefs** are dry rocks 0.3 mile offshore west of Timber Bay.



- 57 Providence Bay light (810) is on the outer end of Providence Point.
- The community of **Providence Bay** is at the head of the bay. There is a post office, telephone, grocery store, hardware store, restaurant and motel. Fresh water and gasoline are available (1999).
- 59 **Simcoe Bank**, on the west side of the entrance to Providence Bay, extends 0.6 mile southwards from **Black Rock** (Simcoe Point).
- 60 Providence Bay light buoy JH1 (809) lies south of Simcoe Bank.
- The west side of the bay NE of Black Rock is lined with large **boulders**. The head of Providence Bay has a sand beach.
- but it is open to south and SW winds and seas. The bay has a bottom of sand over clay.
- 63 The **Public wharf** is 0.5 mile NE of Providence Point. The wharf, elevation 1.5 m, is a concrete and timber crib structure 90 m long and 6 m wide with depths along the east face of 1.5 to 2.1 m. Two timber crib piers extend from the east side of the wharf. Depths are 1.8 to 2.7 m (2000). Fishing vessels berth at this wharf. There is a **launching ramp** close east of the wharf.



- 64 *Providence Bay Marina* is at the Public wharf.
- 65 **Submerged ruins** with a reported depth of 0.6 m extend 26 m NW from the outer end of the Public wharf.



66 Providence Bay wharf light (811) is on the outer end of the ruins.

Providence Bay to Duck Islands

- 67 Shallow **boulders** line the shore between Black Rock and **Mutchmor Point** (45°40′N, 82°19′W), 1.3 miles to the WNW.
- The shore is irregular between Mutchmor Point and **Dominion Point**, 5 miles farther WNW. Shallow **spits** and **reefs**, including **Dean Spit**, **Milton Reef** and **Lougheed Reef**, extend up to 0.7 mile offshore.
- Deans Bay is north of Mutchmor Point. Lonely Bay, west of Deans Bay, has a stream that empties through a sand beach. Lonely (Milton) Point is stony. Lougheeds Point and Square Bay are farther west.
- Melville Point (name incorrectly positioned on Chart 2298) forms the west side of Square Bay. Melville Bay (not named on Chart 2298), Dominion Bay and Dominion Point are farther west.



71 **Anchorage** with good holding and protection from westerly winds can be found in Dominion Bay.

PROVIDENCE BAY (1998)



- The cape west of Dominion Point is low and formed of limestone. The unnamed west point of the cape (shown as Melville Point on Chart 2298) is a little higher than the adjoining coast and is composed of larger broken stones.
- 73 **Shrigley (Srigly) Bay** is close NW of the west point of the cape. A stream empties into the bay through a sand bank.
- 74 **Portage Bay**, 2 miles NW of Shrigley Bay, is shallow and **foul**. **Thistle Reef** extends almost2 miles south from Portage Bay.



- 75 **Caution. Fishing nets** and **stakes** are reported in Portage Bay.
- 76 Shallow **boulders** line the shore from **Portage Point** halfway to **Gatacre Point**, 3.5 miles to the west. **Shamrock Bank** extends 0.9 mile offshore.
- Murphy Harbour (45°47′N, 82°41′W) is a shallow bay 2 miles NW of Gatacre Point. The bay is partly sheltered by an **islet** in the middle of the entrance. Small craft can find **anchorage** midway between the islet and the NW corner of the bay in 2.7 m. A depth of 2.1 m can be found by entering midway between the islet and the SE entrance point. A private T-shaped **wharf** on the west side of Murphy Harbour is used by fishermen. **Murphy Point** forms the west side of the harbour.

- The shore is low and shelving in the area of **Mac's Bay** (**Frechette Bay**) and from there to **Misery Bay**, 1.5 miles to the WNW. **Frechette Bank** extends 1 mile south from **Fréchette Point**.
- 79 **Saunders Reef** ends 1 mile SSE of the entrance to Misery Bay. The outer end of **Taylor Reef** is 1.5 miles south of the bay.



- Anchorage can be found in the outer part of Misery Bay in depths of 3 to 4 m, sand and mud bottom.
- Methuen Reef is the outer end of a rock and boulder spit extending 0.6 mile SW of Misery Point.
- Sand (Hensley) Bay, 2 miles NW of Misery Point, has a sand beach at its head. A shallow bank 0.6 mile wide extends from shore between Sand Bay and Goose Point, a low rocky point 1 mile to the west. Buller Reef, a small cluster of drying stones, is on this bank.

Charts 2266, 2297

- 83 **Carroll Wood Bay** (45°48′N, 82°50′W), which is shallow, has **Morrell Reef** and **Seaman Reef** in the entrance. **Deadman's Point** lies on the NE side of the bay.
- Walkhouse Point, at the SW entrance to Carroll Wood Bay, is dark coloured. **Gaspesia Shoal** and other

MURPHY POINT (1998)



shallow patches lie up to $0.6\,\mathrm{mile}$ ESE and SSE of Walkhouse Point.

Queens Point separates Walkhouse Bay and Fisher Bay. Skin Island lies between Walkhouse Point and Queens Point. A small rocky area named Rudyard Reef is 0.5 mile WNW of Queens Point. The shore is foul between Queens Point and Black (Green) Point, 1.3 miles to the WNW.

Duck Islands

- **Duck Islands** are five islands in an area 2 to 10 miles south of Manitoulin Island. The islands are low and wooded except for Great Duck Island.
- 87 **Thibault (Inner Duck) Island** (45°46′N, 82°56′W), elevation 3.5 m, is connected to Black Point on Manitoulin Island by a shallow **sand** and **boulder** bar. **Thibault Shoal** lies on this bar. The north end of the island is a gravel bank.
- 88 **Macauley Spit** projects 0.8 mile SSE from Thibault Island.
- 89 **Middle Duck Island** has shallow spits extending from its north and SE points. **Hogs Back Reef** is at the end of the north spit. **Kipling Reef** lies 0.5 mile WSW of the island.

 90 **Great Duck Island** (45°40′N 82°57′W) thickly
- 90 **Great Duck Island** (45°40′N, 82°57′W), thickly wooded, rises to an elevation of 50 m. The shore is low and fringed with **boulders** that make landing difficult.



- 91 Great Duck Island light (812) is on the SW side of the island.
- A red and white **radio tower**, elevation 129 m, is close south of *Great Duck Island light*.
- A small cove near the lighthouse offers fair landing for boats.
- A **submerged power cable** is laid from a position on shore near Great Duck Island light in a north and NNE direction to Burnt Island.
- A magnetic anomaly 8 miles SW of Great Duck Island causes reported differences of up to 8° from normal variation.
- Desert Point, the NE corner of Great Duck Island, consists of conspicuous bare sand dunes and a sandy beach. There is no passage between the north coast of the island and Manitoba Reef or Gull Rock.
- 97 **Gravel Point**, on the east side of Great Duck Island, is at the north end of a slight bay. This bay has the silted-in **ruins** of a small wharf at the site of a former fishing station.
- A wreck, elevation 0.7 m, lies near the wharf and gives some shelter from southerly seas. A submerged wreck, depth 1.9 m, is 250 m offshore.
- A private **daymark range** bearing 219° has been reported close north of Gravel Point.

GREAT DUCK ISLAND (1998)



Outer Duck Island (45°38'N, 82°55'W) is joined to Great Duck Island by a sand bar 0.3 mile wide. **Bain Rock** lies on this bar. A private **daymark** is reported near the north end of Outer Duck Island.

Larger vessels can find **anchorage** on the bank north of Outer Duck Island. There is good holding in depths of 5 to 18 m, sand and clay bottom, with shelter from westerly winds but the swell can be high.

Anchorage can be found on the bar south of Gravel Point but with no protection from southerly winds.

Jennie Graham Shoal (*Chart 2297*) is the outermost of several **reefs** lying up to 2 miles south of Great Duck Island, the others being **Larry Rock**, **Kitty Shoal** and **Mary Shoal**. These reefs are separated by deep water from a shallow spit that extends 1.3 miles south of Outer Duck Island.

Horseshoe Bay, on the west side of the island, is shallow and strewn with large **boulders** and suitable only for small boats. The prominent NW tip of Great Duck Island is named **Big Bluff Point** because of its appearance.

105 **Western Duck Island** (45°45′N, 83°00′W) has **boulder** shores except for its sandy NE point, which is the only suitable landing place for boats. **Blake Point**, the SE end of the island, is composed of boulders.

Western Duck Reef is a boulder-strewn shoal 1.2 miles NW of Western Duck Island.

The south end of Thibault Island closed behind the NE point of Western Duck Island, bearing 102°, leads south of Western Duck Reef.

Stafford Rock and another detached shoal lie midway between Western Duck Island and Manitoulin Island.

Chart 2200

There is a Sarnia Vessel Traffic Services Zone calling-in point for upbound and downbound vessels SW of Great Duck Island light. (Consult Radio Aids to Marine Navigation (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic) for more information.)

Charts 2267, 2297

Duck Islands to Mississagi Strait

The bay between **Black (Green) Point** (45°48′N, 82°55′W), previously described, and **Ivan Point**, 0.7 mile to the NW, and the northern half of the bay between Ivan Point and **Edna Point** are **foul**. **Christina Bay**, west of Ivan Point, is shallow.



Anchorage can be found in Christina Bay. Anchorage can also be found west of Edna Point.

BURNT ISLAND HARBOUR (1998)



112 **Caution.** — Local knowledge is required to anchor west of Edna Point because of the **submerged power cable** to Great Duck Island.

Burnt Island (45°49′N, 82°57′W) has low limestone cliffs on its west and north sides. There is a small **wharf** on the north side of the island. The private **wharves** and buildings of a fishing station are nearby.

114 **Caution**. — The **ruins** of a wharf, consisting of above-water and submerged piles, extend from the NNW corner of the main wharf.

Burnt Island Harbour, NW of Burnt Island, offers excellent **anchorage** in depths of 4 to 10 m, mud bottom, with shelter from most winds.

The boiler and frames of a **wreck** near the east shore of the harbour are visible; the boiler has an elevation of 2 m (2000).

117 **Rickley Harbour** is **foul** and suitable only for small boats. **Girouard Point**, 0.9 mile WNW of Rickley Harbour, is low and bluff. **Ainslie Shoal** lies 0.3 mile south of Girouard Point.

Black Point in sight south of Burnt Island, bearing 103°, leads south of Ainslie Shoal.

119 **East Belanger Bay**, NE of Girouard Point, is shallow. **West Belanger Bay**, 1 mile to the WNW, is deep but has little shelter.

Rocks and shoal water lie between Belanger Point, on the SW side of West Belanger Bay, and Quarry Point, 1.1 miles farther WNW. The outermost dangers are Jones Shoal and Labrador Reef. Pearson Island and Dunn Island lie among the reefs and rocks between the two points.

Quarry Bay (Greene Island Harbour) (45°51′N, 83°06′W), entered between Quarry Point and Greene Island, 0.9 mile to the west, offers well-sheltered anchorages in depths of 5 to 15 m.

Greene Island, although only 3.5 m high, is conspicuous because of its thick growth of trees and distance from the shore. There is a cove suitable for boats on the south side of the island. A depth of 1.5 m is reported in the centre of the channel just inside the entrance (1978). There are rocks 100 m inside the entrance.

123 **Caution**. — Local knowledge is required to navigate to the deeper inner part of the cove.

The passage between Greene Island and **Steevens Island**, 0.3 mile to the north, is **foul** and suitable only for small boats. **Mink Reef** lies between Steevens Island and Manitoulin Island.

MISSISSAGI STRAIT, EAST SHORE (1998)



- The **submerged ruins** of wharf cribs extend 274 m from shore in the NE part of the harbour.
- The coast is lined with **reefs** and shallow water from Quarry Bay to Mississagi Strait, 4 miles to the west. **Lynn Point**, 2 miles NW of Greene Island, is low. The outermost **dangers** along this shore are **Purvis Bank**, 0.7 mile ESE of Lynn Point, and **Carter Rock**, 1 mile WSW of Lynn Point.

Mississagi Strait

- Mississagi Strait separates Manitoulin Island from Cockburn Island and connects the main part of Lake Huron with North Channel.
- 128 (The northern approaches to Mississagi Strait are described in Sailing Directions booklet CEN 307 North Channel of Lake Huron.)
- 129 **Cockburn Island** is mostly thickly wooded. Its highest point is **McCaigs** (**McQuaigs**) Hill. The NE, east and south ends of the island are named, respectively, **Devils Horn** (**Channel Point**). **Cinder Point** and **Boom Point**.

130 Mississagi Strait light (813) is on the east side of the strait 0.5 mile NNW of **Boathouse Bay** (45°53′N, 83°13′W). An older light structure, near the light, is a white square **tower** with a red upper part and has a dwelling attached.

- Deep water is found along most of the west shore of Manitoulin Island north of the light.
- 132 A **submerged power cable** crosses from near *Mississagi Strait light* NW to Cinder Point.

133 The Manitoulin Dolomite Quarry wharf is on the east side of Mississagi Strait 1.4 miles north of Mississagi Strait light. Limestone is loaded at this facility. Three fendered dolphins are connected to the shore by causeways and timber decking. The NE and SW dolphins are 91 and 79 m from the central dolphin, which is equipped with a shiploader. Bollards for bow and stern lines are on the shore. A depth of 11.4 m is reported along the berth 5 m off the alignment of the dolphins (1987).

Magnetic Reefs (45°50′N, 83°20′W) are the outermost dangers in the southern approaches to Mississagi Strait. They are named South Reef, East Reef, West Reef, Middle Reef and North Reef. A south cardinal buoy is moored 0.6 mile SSE of South Reef.

135 Caution. — A magnetic anomaly exists south of Boom Point; disturbances of 7° have been reported.

A detached **shoal** patch 2.6 miles east of Magnetic Reefs has a depth of 12 m.

137 **Castilian Shoal** $(45^{\circ}52'N, 83^{\circ}17'W)$ and a **shoal** patch 0.5 mile to the NE, marked by a **buoy**, are on the west side of the south end of the strait. Another **shoal** patch lies south of Cinder Point.

- Devils Horn in sight east of Cinder Point, bearing 358°, leads east of the two unnamed shoals.
- Magnetic Island is a small wooded island 3 miles NE of Boom Point.
- Anchorage can be found north of Magnetic Island in depths of 6 to 8 m, mud bottom, but shelter from southerly winds is poor. **Ricketts Harbour**, 1 mile NNE of Magnetic Island, has depths of 1.5 m in the entrance and offers **anchorage** for small craft in depths of 2 m. **Shoal** water extends south from the east entrance point of the harbour.
- Sand Bay, Doc Hewson Bay, Smith Point and Mud Bay are north of Magnetic Reefs.

South Shore of Cockburn Island

- Boulders and shallow water lie close offshore between Boom Point and Hyndman Bay, 4 miles to the NW.

 Wagosh Bay, with a sand beach at its head, lies west of Hyndman Bay between Pulpwood Point and Station
- (Smith) Point (45°53′N, 83°29′W). Wagosh Reef extends 1 mile south into the middle of the bay. McKay Rock is 0.8 mile SSW of Pulpwood Point.
- 144 **Anchorage** with excellent shelter from westerly winds in depths of 5 to 8 m, sand and mud bottom, can be found between Wagosh Reef and the **shoal** water bordering the west side of the bay.

False Detour Channel

145 **False Detour Channel**, between Cockburn Island and **Drummond Island**, leads from the main part of Lake Huron to North Channel. The **International Boundary** follows False Detour Channel.

East side of channel

- 146 **Wheeler Reef** (45°54′N, 83°31′W) and another **shoal** patch to the south are the outermost **dangers** on the east side of the south entrance to False Detour Channel. **Kitchener Island**, wooded, is surrounded by **shoals** up to 0.2 mile wide.
- 147 **Anchorage** can be found NE of Kitchener Island, sand and mud bottom.
- Herschel Island is 0.8 mile NE of Kitchener Island. The east side of the channel north of Herschel Island is clear of dangers beyond 0.2 mile from the shore except for a shoal bay 2.5 miles NE of Herschel Island.
- Monk Point (45°59′N, 83°25′W) (Chart 2297) is the north end of the east side of the channel.
- 150 (The northern approaches to False Detour Channel are described in Sailing Directions booklet CEN 307 North Channel of Lake Huron.)

South Shore of Drummond Island

ENC US5MI61M Chart 14882

[from U.S. Coast Pilot 6, Chapter 10, partial]


- shore of Drummond Island fronting False Detour Channel is generally deep-to. The S shore of the island is broken, with numerous indentations and many off-lying shoals and islands. The largest bays, from W to E, are Whitney Bay, Island Harbor, Huron Bay, and Big Shoal Cove. These natural harbors have depths of 24 to 40 feet [7.3 to 12.2 m], but because of numerous obstructions, they should not be entered in foggy weather or without local knowledge.
- Whitney Bay, on the E side of Barbed Point, is separated from the lake by several islands with two deep channels, marked by private buoys, leading into the bay. Outside the islands in the approach to the bay, several shoals rise abruptly from deep water. The outermost is a rock, covered 7 feet [2.1 m], 0.9[0.8] mile S of Bellevue Island and marked on the SW side by a buoy. From the buoy a shoal bank extends 0.6 [0.5] mile E. A 12-foot [3.7-m] and a 14-foot [4.3-m] spot are 0.5 and 0.8 [0.4 and 0.7] mile NW of the buoy, respectively. A reef with rocks awash and a reef with rocks just below the surface are 0.4 [0.35] mile S and SE of Bellevue Island, respectively.
- A marina, about 1.2 [1] miles N of Bellevue Island on the N side of Whitney Bay, had reported depths of 8 feet [2.4 m] in the entrance and 6 feet [1.8 m] alongside the berths in 2001. The marina provides transient berths, gasoline, diesel fuel, water, electricity, marine supplies, a launching ramp, a 5-ton [4.5-tonne] hoist, and hull and engine repairs.
- Island Harbor, 3 [2.6] miles SE of Barbed Point, is separated from Whitney Bay by Point Anderson. Espanore Island, 0.8 [0.7] mile SE of Point Anderson, encloses Island Harbor on the SW. A 1-foot [0.3-m] reef with scattered boulders is 0.8 [0.7] mile NW of the SW end of Espanore Island with a 13-foot [4-m] shoal between. A rocky ledge extends 0.7 [0.6] mile S from the island, and a ledge with rocks awash that extends 0.4 [0.35] mile E from the island narrows the entrance to Island Harbor to about 0.25 [0.22] mile.
- Huron Bay, 2.5 [2.2] miles E of Island Harbor, has a deep entrance about 0.4 [0.35] mile wide on the E side of Gravel Island. A ledge with rocks awash extends 0.7 [0.6] mile S from the E side of the bay. A rocky ledge with depths of 1 to 4 feet [0.3 to 1.2 m] extends 0.7 [0.6] mile S from Gravel Island.
- From Huron Bay E for 7 [6.1] miles to Big Shoal Cove, the shore is bordered by shoals extending about 0.5 [0.4] mile off. **Holdridge Shoal**, a detached shoal with

a least depth of 5 feet [1.5 m], is 2 [1.7] miles SE of Gravel Island.


- 157 **Scammon Cove**, just NW of Big Shoal Cove, is enclosed between **Meade Island** on the W and **Scammon Point** on the SE. **Horseshoe Reef**, awash, is 1.3 [1.1] miles SW of Meade Island. A large shoal with a least depth of 8 feet [2.4 m] is between Meade Island and Horseshoe Reef.
- Big Shoal Cove, on the E side of Scammon Point, provides good anchorage in 24 to 30 feet [7.3 to 9.1 m], clay bottom. Detached 4-foot [1.2-m] and 6-foot [1.8-m] shoals, 0.4 [0.35] mile SE and 0.65 [0.56] mile ESE of Scammon Point, re-
- spectively, are dangerous obstructions in the entrance to the cove. A rocky ledge, with some rocks uncovered, extends 1.5 [1.3] miles SSW from the E side of the cove entrance. **Big Shoal**, the outer end of the ledge, expands to a width of 1.2 [1] miles. The SW end of the ledge is marked by a buoy.
- 159 From Big Shoal Cove E for 4 [3.5] miles to False Detour Channel, the shore of Drummond Island should be given a berth of 1.5 [1.3] miles.
- 160 (De Tour Passage and approaches are described in Chapter 3.)

St. Marys River

General



- 1 **St. Marys River** connects Lake Superior and Lake Huron. The river flows in a general SE direction from Gros Cap Reefs in Whitefish Bay to Point De Tour in Lake Huron. The distance between these points is 55 to 65 miles, depending on the route taken. The river is bounded to the north and east by the Province of Ontario, and to the south and west by the State of Michigan.
- 2 St. Marys Falls is bypassed by St. Marys Falls Canal on the United States side of the falls and by Sault Ste. Marie (Canada) Canal to the north of the falls. The lift is from 21 to 23 feet (6.4 to 7 m), depending on water levels.
- 3 A small craft route passes north of Sugar Island, south through Lake George and through the St. Joseph Channel into the North Channel of Lake Huron. (*This route is described in Sailing Directions booklet CEN 307 North Channel of Lake Huron.*)
- Water depths on St. Marys River and vertical clearances under overhead cables and bridges refer to a sloping river surface. (See information on chart datum in Sailing Directions booklet CEN 300 — General Information, Great Lakes.)
- 5 Changes in water level are of concern to vessels navigating in the area because much of the present route in St. Marys River has been made navigable by dredging.
- 6 Caution. The improved channels throughout the length of St. Marys River are subject to shoaling. The United States Corps of Engineers publishes the controlling depth periodically in United States Coast Guard Local Notices to Mariners.
- In a typical year, St. Marys River rises and falls 1.3 feet (0.4 m) as measured by monthly mean levels. Since 1900, the difference between the highest and lowest monthly mean levels above the locks has been 4 feet (1.2 m), and below the locks 6 feet (1.8 m).
- Water levels fluctuate from day to day due to wind and atmospheric pressure; such changes frequently amount to 0.3 to 1.6 feet (0.1 to 0.5 m).
- 9 Exceptional wind and pressure combinations can cause a dramatic oscillation, with a period of two or three hours, in addition to these water level changes. This phenomenon is

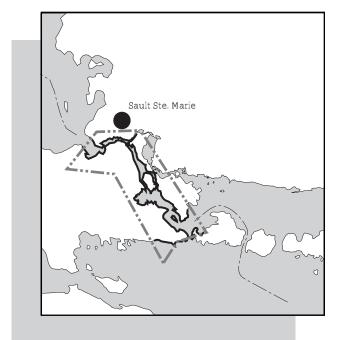

known as a *seiche* and has caused water level changes of over 5 feet (1.5 m) in a period of three hours. East and south winds cause high water below the locks and low water above the locks, while west and north winds have the opposite effect.

9.1 Real-time water level information for St. Marys River below the locks at Sault Ste. Marie is available from the *Canadian Hydrographic Service Automated Water Level Gauge*, telephone number 705-254-7989 and for St. Marys River above the locks from the *Canadian Hydrographic Service Automated Water Level Gauge*, telephone number 705-949-2066. (*More information on water levels is given in Sailing Directions booklet CEN 300 — General Information, Great Lakes.*)

Caution. —A large vessel passing in the narrow channels of St. Marys River can cause a sudden drop of 1.3 feet (0.4 m) in the water level and a pronounced change in the **current**. This effect can be particularly hazardous to small craft in shallow waters.

St. Marys River by the *St. Marys River Vessel Traffic Service Rules* refer to speed over the bottom. Masters are cautioned to regulate the speed of their vessels by reference to points ashore.

12 The rate of the **current** depends largely on the discharge of the river and on the water level at the mouth of the river. The discharge of the river is controlled and varies according to water level requirements. The current is strong when the water level on Lake Superior is high and is further increased if the level of Lake Huron is low.

13 The swiftest **currents** in the navigable channels of St. Marys River are at the Middle Neebish Channel dike (Course 6); the West Neebish Channel rock cut (Course 6); and the Little Rapids cut (Course 2).

14 Caution. — The current over the rapids at Sault Ste. Marie is slight at times but there is often a very strong set at the inlets of the Michigan power canal, SW of the American locks, and the Ontario power canal, NW of the Canadian lock. It may be difficult to judge the effect of these currents.

Current rates in knots

Location	usual	probable low	probable high
Middle Neebish Channel dike (Course 6)	1.3	0.9	2.6
West Neebish Channel rock cut (Course 6)	1.7	1.1	3
Michigan power canal	2.1	1.7	2.6
Ontario power canal	1.7	0.9	2.6

15 **Ice** reaches an average maximum thickness of 46 and 50 cm on the upper and lower parts of St. Marys River, respectively. A record maximum thickness of 81 cm was measured in 1972. The river is not much affected by wind and the channel track remains well defined, with a stable ice sheet outside the channel. Broken pieces of ice accumulate in the channels and in some bottleneck areas. Brash ice may be up to 1.2 m thick by mid-January.

The opening and closing dates for the St. Marys River depend on ice conditions. Between 1974 and 1988, the earliest opening was March 22 and the latest opening April 1. The earliest closing was December 15 and the latest closing February 7.

17 There are additional **lights** in St. Marys River during the ice navigation season. (*Details are given in United States Coast Guard Light List, Volume VII.*)

For vessel traffic service on St. Marys River, contact the Captain of the Port, United States Coast Guard, call sign *Soo Traffic*, on VHF Channels 16 (156.8 MHz) and 12 (156.6 MHz).

For transit of St. Marys Falls Canal, contact the Lockmaster, United States Corps of Engineers, call sign *WUE-21* or *Soo Locks*, on VHF Channels 16 (156.8 MHz) and 14 (156.7 MHz).

For transit of the Sault Ste. Marie (Canada) Canal, contact the Lockmaster, call sign *VDX 23* or *Canadian Canal*, on VHF Channel 14 (156.7 MHz).

For scheduled marine information broadcasts, contact the United States Coast Guard Base, Sault Ste. Marie, Michigan, call sign *Coast Guard Sector Sault Ste. Marie.* (Details are given in United States Coast Guard Light List, Volume VII.)

For scheduled marine information broadcasts, contact Sarnia MTCS Centre, call sign VBE. Direct all calls to Sarnia Radio. (Consult Radio Aids to Marine Navigation (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic) for more information.)

23 Pilotage is compulsory in the waters of St. Marys River north of *latitude* 45°59′N, at the southern approach, and east of *longitude* 84°33′W, at the northern approach, for all vessels of foreign registry and any other vessel which does not qualify for exemption as prescribed in the *Great Lakes Pilotage Regulations*. (See Sailing Directions booklet CEN 300 — General Information, Great Lakes.) There are pilot exchange points at the lower entrance of the river off

Western Great Lakes Pilotage Association

Dispatch office	Telephone	
De Tour, MI	(906) 297-2112	

De Tour Reef and at the upper entrance to the river 3 miles SE of Point Iroquois.

St. Marys River is in *Great Lakes Pilotage District No. 3* and is serviced by the *Western Great Lakes Pilotage Association*.

St. Marys River Vessel Traffic Service

- The Captain of the Port, United States Coast Guard, in Sault Ste. Marie, Michigan, has jurisdiction in the United States waters of St. Marys River between Point De Tour and Point Iroquois, except the waters of St. Marys Falls Canal. St. Marys River Vessel Traffic Service (VTS), operated by the United States Coast Guard, covers St. Marys River and lower Whitefish Bay from De Tour Reef light to Ile Parisienne light, except for the waters of St. Marys Falls Canal. Participation in this service is mandatory for certain vessels. The service is designed to prevent collisions and groundings, to protect improvements to the waterways, and to protect the navigable waters of the VTS area from environmental harm.
- St. Marys Falls Canal is under the direction of the District Engineer, United States Corps of Engineers. Separate regulations cover their use, administration and navigation.
- Sault Ste. Marie (Canada) Canal Lock is operated and maintained as part of the *Sault Ste. Marie Canal National Historic Site* by the City of Sault Ste. Marie (Canada) under an agreement with the *Canadian Parks Agency, Department of Canadian Heritage*.
- 28 Caution. There have been many complaints about wake damage along St. Marys River caused by excessive speed. Speed limits in St. Marys River are maximum allowable speeds. Masters are directly responsible for damage caused by their wakes.
- The master of a vessel in the VTS area shall continuously monitor VHF Channel 16 (156.8 MHz) and be prepared to communicate with *Soo Traffic* on VHF Channel 12 (156.6 MHz).
- The Captain of the Port may order the closing of a channel, designate additional no-overtaking zones or areas of one-way traffic, or establish other temporary traffic rules, if channel obstructions or other conditions of unusual hazard so require. Should a channel be closed, vessels transiting in the direction of the closed channel shall make preparations to be able to immediately anchor.

De Tour Passage

31 Sailing courses recommended by the *Canadian Shipowners Association* and the *Lake Carriers Association* converge 0.7 mile SE of *De Tour Reef light*.

32 There is a Sarnia Vessel Traffic Services Zone calling-in point for upbound and downbound vessels near De Tour Reef light. (Consult Radio Aids to Marine Navigation (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic) for more information.) There is a United States Coast GuardSt. Marys River VTS reporting point for upbound and downbound vessels near De Tour Reef light.

Association and Lake Carriers Association recommend that no vessel should anchor east of a bearing on De Tour Reef light of 340°, or closer than 0.75 mile to the light, or north of the De Tour-Martin Reef course, so that the entrance to De Tour Passage is not obstructed in times of congestion due to fog or other conditions.

Old Fort St. Joe Point, 7 miles NNW of *De Tour Reef light*, is the south end of St. Joseph Island. The **buoyed channel**, entered 1.8 miles east of the point, leads NE through Potagannissing Bay into North Channel (and is described in Sailing Directions booklet CEN 307 — North Channel of Lake Huron). Fort St. Joseph, on the point, was built in 1796 and was at that time the most westerly British fort. It is now a national historic site.

[from U.S. Coast Pilot 6, Chapter 12, partial]

- 55 ENC US5MI61M Chart 14882.—De Tour Passage forms the mouth, or S end, of St. Marys River. The passage has deep water for a width of over 2,500 feet [762 m] between the E end of the upper peninsula of Michigan on the W and the W end of Drummond Island on the E. The shoals that border the passage are well marked.
- 36 **De Tour Reef**, a rocky ledge covered 12 feet [3.7 m], is 0.7 [0.6] mile SE of **Point De Tour** on the W side of the entrance to De Tour Passage. **De Tour Reef Light** (45°56'57"N., 83°54'11"W.), 74 feet [22.6 m] above the water, is on the SE end of the reef; a seasonal sound signal and racon are at the light.
- 37 **De Tour Shoal**, 0.8 [0.7] mile N of De Tour Reef, is marked on the E side by a buoy that marks the W edge of the deep water through the passage.
- Crab Island Shoal, with boulders just below the surface, is on the E side of the passage, 1.3 [1.1] miles E of Point De Tour. A lighted bell buoy marks the W edge of the shoal. Adjacent W of the buoy, De Tour Passage has been dredged to a depth of 30 feet [9.1 m].
- Frying Pan Shoal, boulders covered 19 feet [5.8 m], extends about 0.25 [0.22] mile from shore on the W side of the passage 2.2 [1.9] miles N of De Tour Reef Light. Frying Pan

DE TOUR PASSAGE (1998)



Island, 0.3 [0.26] mile N of Frying Pan Shoal, is marked on the E side by a light. An abandoned fueling dock on the SE side of the island has a depth of about 21 feet [6.4 m] alongside. 40 **De Tour Village, MI**, is on the west side of De Tour Passage northwest of Frying Pan Island. A ferry for passengers, autos, and limited freight operates year round from the village across the passage to Drummond Island. Small craft landing at De Tour Village must take care to avoid submerged cribs and dock ruins. A Michigan State Waterways Commission small-craft harbor protected by a breakwater marked by a light on the south end, is about 400 yards [366 m] north of the ferry pier. Transient berths, gasoline, diesel fuel, water, electricity, sewage pump-out facility, marine supplies, a launching ramp, a 25-ton [22.7-tonne] lift for hull and engine repair, and harbormaster services are available. The harbormaster monitors VHF-FM channels 16 and 9.

42 The W shore of Drummond Island fronts De Tour Passage from Barbed Point N for 3 [2.6] miles to Black Rock Point. Dolomite is shipped from an 800-foot [244-m] dock of Osborne Materials Co., 1.3 [1.1] miles N of Barbed Point. The dock has a deck height of 10 feet [3 m] and reported depths of 23 feet [7 m] alongside. A conveyor system can load vessels at 4,000 tons [3,600 tonnes] per hour. Buoys mark shoals N and S of the dock.

43 Gaffney Point (46°00'42"N., 83°54'30"W.) is on the W side of De Tour Passage 1.4 [1.2] miles N of De Tour Village. Watson Reefs is a narrow shoal about 0.2 [0.17] mile offshore between Gaffney Point and the village. Buoys mark the NE and SE sides of the shoal, and a light is near the center. Pipe Island, marked on the SW side by a light, is 0.6 [0.5] mile NE of Gaffney Point. A buoy marks the extent of shoals SW of the island. Pipe Island Twins is a pair of small islands about 0.5 [0.4] mile NE of Pipe Island with shoals between. The E island is marked at the N end by a light, and shoals that extend N from the light are marked by a lighted buoy. Pipe Island Shoal, with a least depth of 11 feet [3.4 m], is 0.5 [0.4] mile SE of Pipe Island. A lighted buoy marks the SE side of the shoal.

44 **Squaw Island**, marked at the S end by a light, is 1.4 [1.2] miles N of Pipe Island. Detached 17- and 21-foot [5.2- and 6.4-m] spots are 0.3 [0.26] and 0.6 [0.5] mile WNW of Squaw Island, respectively.

A 1,000-foot [305-m] wharf, used for vessel storage and owned by the Interlake Steamship Company, is 0.6 [0.5] mile NW of Gaffney Point. The reported controlling depth is 26 feet [7.9 m] along the lower 700 feet [213 m] of the wharf face. A shoal with a least depth of 23 feet [7 m] is about 400 feet [122 m] NE of the face.

- 46 **Sweets Point** is about 2 [1.7] miles NW of Gaffney Point. Shoals extend about 0.6 [0.5] mile N from the point and are marked near the outer end by a light.
- Raber Point (46°03'57"N., 84°01'57"W.), 7 [6.1] miles northwest of Gaffney Point, is the south entrance point to Raber Bay. Lime Island is in the middle of the river, 1.7 [1.5] miles northeast of Raber Point. An 800-foot [244-m] wharf is on the west side of Lime Island and is used by recreational boaters. The wharf, marked by lights on the north and south ends, has a least depth of about 17 feet [5.2 m] along the upper 300 feet [91 m] and 25 feet [7.6 m] along the lower 500 feet [152 m].
- At the N end of De Tour Passage, the upbound and downbound vessel channels are divided by the Pipe Island group. The upbound channel leads N on the E side of Pipe Island Shoal. Abreast Pipe Island Twins Light, the channel turns NW, leads S of Squaw Island, and rejoins the downbound channel N of Sweets Point. **Pipe Island Course**, downbound, leads SE from Sweets Point between Gaffney Point and Pipe Island to the N end of De Tour Passage. These channels have a depth of 29 feet [8.8 m].
- Lime Island Channel, upbound and downbound, leads NW from Sweets Point to the turn between Raber Point and Lime Island and has a depth of 29 feet [8.8 m]. At the turn, a lighted midchannel buoy separates the two-way traffic.

 Round Island Course, upbound and downbound, leads N from the turn at the upper end of Lime Island Channel for 3.5 [3] miles to the turn between Point aux Frenes and Hay Point. The depth in the channel is 28 feet [8.5 m]. Round Island, marked by a light, is on the W side of the channel near its midlength.
- Point aux Frenes (46°07'54"N., 84°01'42"W.) is on the W side of the river at the turn from Round Island Course into Munuscong Lake. Lights mark the course changes in the turn.
- 52 ENCs US5MI61M, US5MI62M Charts 14882, 14883.—Munuscong Lake is a widening in St. Marys River from Point aux Frenes upstream to Neebish Island. Lower Course 8, upbound and downbound, leads from the turn at Point aux Frenes NW for 4.6 [4] miles through Munuscong Lake. The depth in the channel is 28 feet [8.5 m]. The channel is marked at the lower end by a 128° lighted range on Hay Point.
- ENCs US5MI62M, US5MI50M Chart 14883, 14887.—Near the middle of Munuscong Lake, at the upper end of Lower Course 8, the dredged channel of the St. Marys River divides to lead around either side of Neebish Island. The upbound channel leads generally N between the E side of Neebish Island and St. Joseph Island, thence WNW between the N side of Neebish Island and the S end of Sugar Island, thence N again in Lake Nicolet to the junction with the downbound channel. The channel is about 17.5 [15.2] miles

long between the junctions with the downbound channel. The courses through this stretch are well marked by lighted and unlighted buoys and ranges.

Course 10, marked by a 322.1° lighted range on the S end of Neebish Island, leads NW for 2.1[1.8] miles from the junction with the downbound channel at the upper end of Lower Course 8. The channel has a depth of 27 feet [8.2 m] for a least width of 500 feet [152 m].

Munuscong Lake to Lake Nicolet

ENC US5MI62M Chart 14883

- Course 9 leads 3.1 miles NNE to Johnson Point. Everens Point $(46^{\circ}14'N, 84^{\circ}06'W)$ is onSt. Joseph Island, east of the route. The eastern side of the channel has a project depth of 21 feet (6.4 m) for a width of 200 feet (61 m). The western side has a project depth of 27 feet (8.2 m) for a width of 300 feet (91 m).
- 56 Sailors Encampment Upbound range lights (1060, 1061), at the north end of Course 9, indicate the deeper-draught western side of the channel.
- 57 Two white **daymarks** close east of *Sailors Encampment Upbound range lights* in line indicate the shallower eastern side of Course 9.
- An L-shaped Public **wharf**, known locally as **C Line Dock**, is NW of the *Sailors Encampment Upbound range* front light-structure. The west face is 45 feet (14 m) long and has a least depth of 4 feet(1.2 m). The north face is 16 feet (4.9 m) long and has a least depth of 5 feet (1.5 m). The south face is 46 feet (14 m) long and has a least depth of 2 feet (0.6 m) at the shore end. The deck elevation is 5 feet (1.5 m). There is a launching **ramp** suitable for small craft.
- Sailor's Encampment $(46^{\circ}16'N, 84^{\circ}06'W)$ is a **Customs** vessel reporting station for pleasure craft.
- 60 **Course 8** leads for 1 mile from Johnson Point to a position between **Mirre Point** and **Coyle Point**. The NE side of the channel has a project depth of 21 feet (6.4 m) for a width of 400 feet (122 m), and the SW side has a project depth of 28 feet (8.5 m) for a least width of 600 feet (183 m).
- 61 The deeper side of the channel is marked by Rains Wharf range (1062, 1063) and Point of Woods range (U.S. 13145, 13155). Rains Wharf range is on St. Joseph Island east of Johnson Point; Point of Woods range is on Neebish Island north of Mirre Point.
- Course 7 leads for 2.8 miles through Munuscong Channel from Mirre Point to Stribling Point (46°19'N, 84°07'W), which is the NW point of St. Joseph Island. The east side of the channel has a project depth of 21 feet (6.4 m) for a width of 200 feet (61 m) and the west side a project

depth of 27 feet(8.2 m) for a least width of 300 feet (91 m). The channels are marked by *Dark Hole range beacons and lights (U.S. 13170 to 13185)* and by *Harwood Point range beacons and lights (U.S. 13190 to 13205)*.

- There is a small-craft launching **ramp**, with two small wharves, on the west side of St. Joseph Island 0.5 mile south of Stribling Point.
- 64 (The passage between St. Joseph Island and Sugar Island leading into St. Joseph Channel and Lake George is described in Sailing Directions booklet CEN 307 North Channel of Lake Huron.)
- Course 6 leads from Stribling Point through Middle Neebish Channel to the lower end of Lake Nicolet. The north side of the channel has a project depth of 21 feet (6.4 m) for a least width of 200 feet (61 m). The south side of the channel has a project depth of 27 feet (8.2 m) for a least width of 300 feet (91 m).
- Point ranges and Middle Neebish South range lights (U.S. 13275, 13280). Stribling Point Upbound range lights (1064, 1065) are at the north end of St. Joseph Island. The lighted ranges indicate the deeper-draught southern side of the channel.
- Two white **daymarks** close north of *Stribling Point Upbound range lights* in line indicate the shallower northern side of Course 6.
- 68 **Caution**. The range structures at the upper end of the course are in the open water of Lake Nicolet. They are protected by rip-rap.
- 69 Three **lights**, numbered 50, 54 and 58, are shown on a **dike** that borders the north side of Middle Neebish Channel. *Lights 50* and 58 are each shown from a red skeleton tower with a red triangular **daymark**. *Light 54* is shown from a red column with a similar **daymark**.

[from U.S. Coast Pilot 6, Chapter 12, partial]

- Course 5 leads northwest from the lower end of Lake Nicolet for about 4.5 [3.9] miles to the junction with the downbound channel near midlake. The east side of the channel has a depth of 21 feet [6.4 m] for a width of 200 feet [61 m] and the west side of the channel has a depth of 27 feet [8.2 m] for a least width of 300 feet [91 m]. The east and west sides of the channel are marked at the lower end by a 150.5° lighted range.
- West Neebish Channel, downbound, diverges from the upbound channel near the middle of Lake Nicolet and leads generally S for about 16.5 [14.3] miles between the W side of Neebish Island and the mainland to the lower junction with the upbound channel S of Neebish Island in Munuscong Lake. The courses through this stretch are well marked by lighted and unlighted buoys, lights, and lighted ranges.

- Course 4 is a continuation of the downbound portion of Course 4, upbound and downbound, which leads through the middle of Lake Nicolet. From the junction with the upbound channel, Course 4 leads SSE for 2.5 [2.2] miles to the lower part of the lake. The channel has a depth of 27½ feet [8.4 m] and is marked by a 159.6 lighted range.
- 73 Course 5 leads S from the lower part of Lake Nicolet for 4.4 [3.8] miles to the rock cut on the W side of Neebish Island. The channel has a depth of 27½ feet [8.4 m] and is marked by a 181°30' lighted range.
- Course 6 leads SE from the head of the rock cut for 2.7 [2.3] miles to a point about 0.5 [0.4] mile N of Sawmill Point. The upper part of this course, through the cut, is bordered on either side by a vertical rock masonry wall marked by lights. The channel has a depth of 28½ feet [8.7 m] and is marked at the lower end by a leading light.
- A well-protected small-craft anchorage with mud bottom and 3 to 15 feet [0.9 to 4.6 m] of water is reported on the NE side of Course 6 about 1.2 [1] miles above Rock Cut Lower Leading Light between a spoil island and a dike.
- Course 7 leads S from the turn 0.5 [0.4] mile N of Sawmill Point for 2.4 [2.1] miles to **Moon Island**. The channel has a depth of 28½ feet [8.7 m] and is marked by a leading light on the N end of Moon Island.
- 77 **Course 8** leads SE from Moon Island for 4.6 [4] miles through the upper part of Munuscong Lake to the junction with the upbound channel S of Neebish Island. The channel has a depth of 27½ feet [8.4 m].
- 78 Course 4, upbound and downbound, leads through the middle part of Lake Nicolet from the vicinity of Ninemile Point (46°23'36"N., 84°13'42"W.) north-northwest for 3.5 [3] miles to Six Mile Point. The channel has a depth of 29 feet [8.8 m] for a width of 1,500 feet [457 m]. The upbound (east) side of the channel is marked by a 339.5° lighted range.
- 79 An anchorage, with a depth of 28 feet [8.5 m] and marked by buoys, is adjacent to the downbound side of Course 4 opposite Ninemile Point.
- 80 ENCs US5MI62M, US5MI63M Charts 14883, 14884.—Course 3 and Course 2, Little Rapids Cut, lead NNW from Six Mile Point for about 4.5 [3.9] miles to the turn above Mission Point. The channel has a depth of 27 feet [8.2 m] for a least width of 600 feet [183 m]. A leading light on the W side of Sugar Island marks Course 3 downbound, and a 323.4° lighted range at Frechette Point (46°27'30"N., 84°17'00"W.) marks Course 3 upbound. A 153.1° lighted range at Six Mile Point marks Course 2 downbound.
- Small-craft facilities.—A small-craft channel marked by buoys leads northwest from Course 2 on the north side of Frechette Point between the mainland and Island No. 3. There is no access from this channel at its upper end to the main channel. A marina developed by Michigan State Waterways Commission is on the mainland side of the channel, opposite

the lower end of Island No. 2. The marina can provide water, electricity, pump-out facility, a launching ramp and harbormaster services.

- 82 Mission Point (46°29'12"N., 84°18'12"W.), marked by a light, is on the W side of the river just below the turn at the upper end of Course 2. A ferry operates across the river from Mission Point to Island No. 1.
- 83 Three ice stabilization islands marked by lights are on the SW side of the river about 0.1 [0.09], 0.3 [0.26] and 0.45 [0.40] mile above Light 99.
- 85 **ENC US5MI63M Chart 14884.**—At the upper end of Course 2, Course 1, **Bayfield Channel**, turns WNW in the approach to St. Marys Falls Canal. The channel has a depth of 28 feet [8.5 m] W to the outer end of East Center Pier of the canal and is marked at the lower end by a **109.2°** lighted range.
- Bayfield Dike is on the north edge of the channel 0.9 mile NW of Mission Point. The north edge of the channel west of the dike is marked by lighted **buoys**.
- 86.1 (A passage joining the route from the east between Mission Point and Bayfield Dike is a small-craft route that leads between Sugar Island and the mainland and into Lake George and St. Joseph Channel. This route is described in Sailing Directions booklet CEN 307 North Channel of Lake Huron.)
- 87 Bayfield Dyke light (1066) is at the centre of Bayfield Dike. The daymarks face upstream and downstream.
- Facilities for small craft are offered by two **marinas** and a sailing club on the Canadian side of the river.
- 89 Bellevue Marina is a municipal facility close south of a pair of prominent tall apartment buildings 0.4 mile NE of Bayfield Dyke light.
- 90 Bellevue Marina breakwater light (1065.9) is at the east end of an L-shaped **breakwater** that forms the west and south sides of the marina basin.
- A **buoyed channel** 100 feet (30 m) wide and 0.3 mile long leads to the marina basin entrance. This channel is not suitable for vessels drawing more than 6 feet (1.8 m) (1984). The entrance to the basin has depths of 8 to 13 feet (2.4 to 4 m) (1984) with lesser depths in the basin, and depths of 4 to 10 feet (1.2 to 3 m) at the floating wharves. Boaters are cautioned to avoid a drying area in the basin 150 feet (46 m) east of the floating wharves.
- 92 Bellevue Park, a municipal day-use facility close east of the marina, has picnic tables, walking trails, and a bandshell with special summer concerts.
- 93 Roberta Bondar Marina is a municipal facility 1.3 miles WNW of Bellevue Marina, near the Sault Ste. Marie (Canada) Civic Centre.

- 94 Algoma Sailing Club, at the SE corner of Bellevue Park, is private and most facilities are available only to yacht club members.
- Facilities of downtown Sault Ste. Marie are within easy reach of both marinas, using scheduled city bus services.

St. Marys Falls

ENC US5MI63M Chart 14884

- Three power canals and five navigation locks bypass **St. Marys Falls**. The rapids are less than 1 mile long with a fall of 18 to 24 feet (5.5 to 7.3 m), depending on the water level.
- 97 **St. Marys Falls Canal** is in United States territory south of St. Marys Falls. It consists of North Canal, with the Davis Lock, and South Canal, with the Poe and MacArthur Locks.
- 98 **Sault Ste. Marie** (Canada) Canal passes north of St. Marys Falls and has one lock. This route is available only to recreational traffic.
- 99 **Historical note.**—The first canal through St. Marys Falls was built on the north side of the rapids in 1797 and 1798. It was built by the *North West Company* for the furtrade canoes, and was 2,580 feet (787 m) long with a lock 38 feet (12 m) long and 8 feet 9 inches (2.6 m) wide. This canal was destroyed in July 1814 by American troops. It has been reconstructed and is now a *National Historic Site* on the *St. Marys Paper Ltd.* grounds on Huron Street.
- The original United States Canal and lock opened in 1855. The Canadian lock was first built in the late 19th century to complete a national policy of establishing an all-Canadian trade route to the west. The "Chiroa Incident" of 1870, where use of the United States locks was denied to Canadian forces sent to control the Riel Rebellion, also contributed to the decision to build a lock on the Canadian side of the St. Marys River.
- 101 Caution. There is a slight current above the rapids at St. Marys Falls. There is often a very strong set near the inlets of both the Michigan and Ontario power canals.

102 (More information on currents is given at the beginning of this chapter.)

[from U.S. Coast Pilot 6, Chapter 12, partial]

103 St. Marys Falls Canal, 1.9 [1.7] miles long between the upper and lower entrances, is along the S side of St. Marys River abreast the falls. The canal comprises North Canal and South Canal, separated by a center pier and each having two locks. The canals are faced with revetment walls and piers

SAULT STE. MARIE FROM EAST (1998)



of timber, steel, and concrete. The outer ends of the N, S, and center piers at the canal entrances are marked by lights. The downbound approach to the canal is marked by a 076.2° lighted range.

South Canal has a minimum width of 293 feet [89 m] and a depth of 27.5 feet [8.4 m] in the E entrance and 28 feet [8.5 m] in the W entrance. North Canal, has a minimum width of 280 feet [85.3 m] and is limited by the locks to a depth of 23.1 feet [7.0 m].

All salt water vessels transiting the lock systems along the St. Marys River which are not equipped with either bow or stern thrusters, are required to be assisted by

Lock Dimensions at St. Marys Falls

Lock Name	Width (feet) [metres]	Length (feet) [metres]	Depth (feet) [metres]
MacArthur	(80) [24.3]	(800) [243.8]	(31) [9.4]
Poe	(110) [33.5]	(1200) [365.7]	(32) [9.7]
Davis	(80) [24.3]	(1350) [411.4]	(23) [7.0]
Sabine (closed)	(80) [24.3]	(1350) [411.4]	(23) [7.0]
Canadian	(49) [14.9]	(225) [68.5]	(9½) [2.8]

one or more tugs to ensure that full control of the vessel is maintained at all times. Tugs are also required for all power vessels which experience control problems at low speeds, or in close quarters.

106 **Communications.**—The chief lockmaster operates a vessel dispatch station from the administration building on the pier between Poe and MacArthur Locks. The station operates on VHF-FM channels 14 and 16; call sign, WUE-21. The voice call for the station is WUE-21 or Soo Locks.

Upbound vessels intending to transit the locks shall initially contact the lockmaster immediately before the turn at Mission Point, at the intersection of Course 1, Bayfield Channel and Course 2, Little Rapids Cut for lock assignment. Downbound vessels shall make initial contact at Ile 106.2 Parisienne, then at Big Point for lock assignment. In order that the dispatch made will cause the least delay to the vessel involved, vessel masters are requested to refrain from making their dispatch calls prior to reaching the above locations. This station is considered to have an effective operating range of about 50 [43] miles. Operation is limited to communication with vessels on matters related to canal operation, traffic movement through the locks, and for emergency purposes. Masters are urged to provide supervision of the vessel's radiotelephone when approaching and transiting the canals

SAULT STE. MARIE FROM WEST (1998)



so as to be promptly advised of changes in lock dispatch, impending bridge closures, etc.

106.3 Vessels requiring special services while in the locks should contact the station in advance to expedite necessary arrangements by canal authorities.

lights, one red and one green, facing E, are on the SE wall ends of each lock to indicate to upbound vessels when it is safe to proceed into lock chambers. These signals are normally set to show red and are changed to green only when it is safe and permissible for each individual vessel to enter the lock. Vessel masters are cautioned not to enter a lock chamber upbound except on a green light signal, even though the lock gates may be open.

In order that masters of downbound vessels approaching the NW pier may know when either the Davis or the Sabin Lock is filling, three signals have been established. These consist of flashing yellow lights, one placed on top of a light pole at the end of the upper nose pier between these two locks, the second at a point about 100 feet [30 m] upstream of the railroad bridge on the NW pier, and the third on top of a light pole about midway between the railroad bridge and the end of the NW pier. The lights flash during the first 8 minutes

of each lock filling, which is the period when flow toward the lock is increasing. In order that masters of downbound vessels approaching the SW or W center piers may know when either the MacArthur or Poe Lock is filling, a signal consisting of a flashing yellow light is mounted on the top of a light pole at the end of the nose pier between the MacArthur and Poe Locks. The light flashes during the period when either lock is filling.

109 Upbound vessels approaching the E center pier are cautioned against landing too close to its outer end because of eddy currents. When the N locks are being emptied, an eddy moving upstream is formed along the SE pier. When the S locks are being emptied, the current at the end of the center pier flows N. When the N locks are emptying, this latter current is usually reversed. Wind conditions alter the situation.

110 A current sets across the end of the W center pier during the filling of the locks. The current can set in either direction depending on conditions. Vessels bound for Davis Lock should not attempt to make the pier near its end.

Downbound vessels dispatched to MacArthur Lock are cautioned to hold on Vidal Shoals Channel Range until N of the light on SW pierhead. Due to the strong current that sets into the power company canal adjacent to the end of the SW pier, such vessels should pass at least 200 feet [61 m] N of the end of the pier. A light is about 1,000 feet [305 m] E of the outer end of SW pier; vessels should land E of the light.

- 112 **Caution**.—Downbound vessels approaching MacArthur and Poe Locks may encounter a northerly current, especially near the end of W center pier. Downbound vessels approaching Poe Lock should land downstream of the end of W center pier.
- 113 Before entering a lock, all vessels shall put heaving lines, attached to forward and aft cables, out onto the approach pier, and either line or cable shall be continuously carried by the vessel deckhands or canal linesmen until the vessel is moored in the lock chamber in all cases where the mooring is made on the east side of the lock adjacent to the approach pier used. Vessels intending to moor on the side of the lock opposite that adjacent to the approach pier shall, in the same manner, put out heaving lines and have the line or cable continuously carried along the approach pier, shall take them in just as the lock is entered, and put them out again on the mooring side of the lock as soon as possible.
- Mariners are advised that often times adverse local condition, i.e. high winds, current conditions, and inclement weather exist as vessels approach, enter and/or depart the Soo Locks. These conditions combined with close quarters slow speed maneuvering, particularly with large vessels not equipped with bow or stern thrusters, may cause control difficulties for certain classes of vessels.
- 114.1 Therefore, any vessel requesting lockage which in the opinion of the Master in consultation with the Pilot on board, where applicable, may experience severe control problems due to the above conditions must request assistance by one or more tugs to ensure full control over the vessel at all times. Vessel Masters and Pilots must consult with the Lockmaster concerning local conditions well in advance of arrival at the lock to allow tug assistance to be arranged if necessary. These guidelines apply to all vessels.
- 115 Bow and / or stern thruster use shall be kept to a minimum while transiting the Locks. Thrusters shall not be used while the thrusters are opposite lock gates. They may be used sparingly for short duration within the lock to maintain the ship position near the mooring wall or in an emergency. Thrusters shall be at zero thrust during the period the ship is stopped and moored to the wall with all lines out, and during raising and lowering of pool levels within the chamber.
- 116 Vessels leaving the MacArthur Lock and Poe Lock at approximately the same time, the following policy will apply:
 117 I. The first vessel to leave will be the vessel in the lock which is ready for vessel release first. The vessel in the other lock will be restrained by the gates remaining closed and the wire rope fender remaining in the down position.

- 2. On downbound passages, the vessel retained shall not leave the lock until such time as the bow of the vessel leaving first reaches the end of E center pier.
- 3. On upbound passages, the vessel retained shall not leave the lock until such time as the bow of the vessel leaving first reaches the railroad bridge.
- 4. When a 1,000-foot (305-m) vessel is ready to depart the Poe Lock and a vessel in the MacArthur Lock leaves first, the 1,000-foot (305-m) vessel may start to leave once the bow of the other vessel reaches the end of the respective nose pier.
- 5. The above policy may be varied on a case by case basis at the direction of the Chief Lockmaster on duty.
- 122 6. Vessels will remain in radio contact with each other and the Chief Lockmaster at all times until clear of the lock area.
- Regulations.—The use, administration, and navigation of St. Marys Falls Canal and locks are under the direction of the District Engineer, U.S. Army Corps of Engineers, Detroit District. (See 33CFR 207.440 and 207.441, chapter 2 [of U.S. Coast Pilot 6], for regulations.) Copies of the regulations and the vessel transit forms required in 207.440(k) are available at the U.S. Canal Office in the operations building adjacent to Davis Lock. A notary public and a marine post office, designated Canal Station, are in the operations building.
- 124 Upbound recreational small craft desiring lockage shall report to the small-craft dispatch station near the outer end of E center pier. Downbound recreational craft shall report to the dispatch station on SW pier. Rowboats and canoes are prohibited. All craft must have power and an auxiliary movement source such as oars, a life jacket for each person on board, 75 feet [22.9 m] of line to reach the top of the lock wall, and lock report forms available at the dispatch station.
- Whenever, in the opinion of the Detroit District Engineer or his authorized representatives at St. Marys Falls Canal, the safety of lock structures or vessels in the canal area might be jeopardized by the continuance of vessel movements during periods of low visibility, all vessel movements in the canal area, and in approaching and entering the canal area, may be stopped. Whenever the stopping of vessel movements becomes advisable, the U.S. Coast Guard will be informed and will take such usual action as is necessary to advise vessels approaching St. Marys Falls Canal and to direct their anchoring. The chief lockmaster in the control tower at St. Marys Falls will personally direct, by radiotelephone, all movements of vessels in the locks area at the time the stop order is issued, and may approve continued movement or order mooring at specified locations.
- If a person disembarking for medical attention is a stretcher case, the lock-master must be given enough notice

to route the vessel to the MacArthur Lock to avoid the long carry across the lock gates.

The *International Railway Bridge*, 0.3 mile west of the locks, has a lift **bridge** span across the South Canal, with a clear height of 123 feet (37.5 m) in the raised position and 16 feet (4.9 m) in the lowered position. There is a double-leaf bascule **bridge** across the North Canal, with a clear opening between canal walls of 282 feet (86 m) and a closed height of 13 feet (4 m).

Signal lights on the vertical lift and bascule spans show green when the span is completely open and red at other times. The signal to open either span is *one short and one long blast*. The bridge operator will answer by giving *one long and one short blast* and will then open the bridge.

If the bridge cannot be opened for any reason, the bridge operator will answer by giving *five short blasts* and the vessel must stop. When the bridge is ready to open, the bridge operator will give *one long and one short blast* and will then open the bridge.

The *International Highway Bridge*, a girder **bridge** 125 feet (38 m) east of the railway bridge, has a horizontal clearance of 410 feet (125 m) and a vertical clearance of 124 feet (37.8 m).

131 Vidal Shoals Channel range lights (described later in this chapter) in line bearing 076° lead to the approaches of the United States and the Canadian canals.

Sault Ste. Marie (Canada) Canal

The **Sault Ste. Marie (Canada) Canal** cuts through red Jacobsville sandstone. It is 1.2 miles long between the outer ends of the upper and lower entrance piers and 150 feet (46 m) wide. The east and west approach channels are dredged through **boulder** shoals.

The original lock was over 900 feet (274 m) long. The new lock is 254 feet (77.4 m) long and 50 feet (15.2 m) wide and has a depth at the sills of 9.8 feet (3 m). Maximum vessel dimensions are 225 feet (68.6 m) long and 49 feet (14.9 m) wide.

The lock operates from mid-May to mid-October under the *Historic Canals Regulations*. Copies of these regulations and information on hours of operation are available at the *Visitors Centre* on the north side of the lock or by contacting the Superintendent, *Sault Ste. Marie Lock National Historic Site*, 1 Canal Drive, Sault Ste. Marie, Ontario P6A 6W4; telephone: (705) 941-6262, fax: (705) 941-6206.

135 Lock traffic signal **lights** are as follows: red – wait; flashing red – the lock is being prepared, prepare to cast off; green – the lock is ready, proceed.

136 A railway swing **bridge**, owned by *Wisconsin Central Railway*, crosses the upper canal. The central pier is

on the north side of the canal. Railway traffic has precedence over vessel traffic. A **light** in the centre of the bridge span that crosses the canal shows red when the bridge is closed. A **light** on the north side of the canal shows green when the bridge is open. These lights are shown at an elevation of 14 feet (4.3 m).

There is an emergency swing dam, resembling a swing bridge, on the north side of the canal close east of the railway bridge.

for pleasure craft visiting the *Sault Ste. Marie Canal National Historic Site* is available at both the east and west piers. Contact the lockmaster, call sign *VDX 23* or *Canadian Canal*, on VHF Channel 14 for permission and for instructions.

approaching the Sault Canal may encounter strong northward **currents** in the area of the caissons that run from the NW pier of the canal to the *Algoma Steel Corporation* shoreline. Upbound vessels approaching the entrance to the Sault Canal may encounter strong southward **currents** and choppy water due to the confluence of the Great Lakes Power Canal tailrace with the St. Marys River rapids.

Sault Ste. Marie

pleasure craft.

The city of **Sault Ste. Marie**, **Ontario**, had a population of 81,000 in 1998. It has several manufacturing industries. Principal imports are coal, iron ore, iron ore concentrates, limestone and petroleum products. Exports are plate and sheet steel, pig iron, primary iron, steel, paper and forest products.

Sault Ste. Marie is a **Customs** vessel clearing station for commercial vessels and a vessel reporting station for

A Canadian Coast Guard marine radio station at Sault Ste. Marie is remotely controlled from Sarnia MCTS Centre, call sign VBE. Direct all calls to Sarnia radio. (Consult Radio Aids to Marine Navigation (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic) for more information).

143 Tugs are available.

The city has passenger, freight and express service and transcontinental bus service. *Sault Ste. Marie Airport*, 20 km west of the city, is operated by the *Department of Transport*.

The harbour is a Public Harbour administered by the *Department of Transport*. The **harbour limits** are defined as all the waters of the St. Marys River north of the International Boundary, west of a line drawn due south from the extremity of **Partridge Point** $(46^{\circ}31'N, 84^{\circ}14'W)$, and east of a line drawn south from Pointe aux Pins lighthouse, at Pointe Louise.

146 The former Public **wharf**, now owned by *Purvis Marine Ltd.*, is 0.8 mile SE of the SE entrance pier to the Sault Ste. Marie (Canada) Canal. It is a concrete structure extending 600 feet (183 m) SW from shore with an L-end extending 310 feet (94 m) NW. There are freight sheds and an oil pipeline on the wharf. In 1984, there were depths of 15 to 20 feet (4.6 to 6.1 m) along the east face of the wharf and depths of 20 to 24 feet (6.1 to 7.3 m) along the outer face of the L-end.

The west side of the wharf encloses a triangular basin. The basin entrance is 70 feet (21 m) wide with depths of 13 to 17 feet (4 to 5.2 m). The inner face of the L-end had depths of 12 to 14 feet (3.7 to 4.3 m) and the west face of the main wharf 5 to 14 feet (1.5 to 4.3 m). The basin had depths of 12 to 17 feet (3.7 to 5.2 m) but the north end is shallow.

148 A three-sided **wharf** area faced with steel sheeting, close NW of the west entrance to the Canadian canal, forms part of the wharves and slip of the Algoma Steel Corporation Ltd. The SE face of this wharf is 490 feet (149 m) long, the SW face is 355 feet (108 m) long, and the NW face is 200 feet (61 m) long. The wharf has an elevation of 6 feet (1.8 m). Steel is loaded here.

149 A **slip** 1,800 feet (549 m) long and narrowing from 240 to 150 feet (73 to 46 m) wide extends NW from the abovementioned wharf. The NE side of the slip has a continuous concrete wharf face with an elevation of 6 feet (1.8 m). Two mobile ore cranes unload coal and iron ore.

The SW side of the slip has a **wharf** face 400 feet (122 m) long with a deck elevation of 7 feet (2.1 m), close inside the entrance to the slip. Self-unloading vessels discharge limestone and gypsum at this berth.

An overhead coal conveyor with a vertical clearance of 125 feet (38 m) spans the *Algoma Steel Corporation* slip 0.2 mile from the entrance.

[from U.S. Coast Pilot 6, Chapter 12, partial]

- 152 **Sault Ste. Marie, MI**, a city on the S side of St. Marys River adjacent to St. Marys Falls Canal, is a customs port of entry.
- 153 **Towage.**—Tugs to 2,250 hp are available at Sault Ste. Marie and operate throughout the river. Arrangements are made through Great Lakes Towing Company's dispatch office in Cleveland at 800-321-3663 or via remote VHF-FM antenna; at least 4 hours advance notice is requested.
- 154 Quarantine, customs, immigration, and agricultural quarantine.—(See chapter 3 [of U.S. Coast Pilot 6], Vessel Arrival Inspections, and appendix [of U.S. Coast Pilot 6] for addresses.)
- 155 **Quarantine** is enforced in accordance with the regulations of the U.S. Public Health Service. (See Public Health Service, chapter 1 [of U.S. Coast Pilot 6].)

- Coast Guard.—Sault Ste. Marie Coast Guard Station, Sector Office, and Base are close S of the lower entrance to South Canal. A Captain of the Port office is at the base. (See Appendix A [of U.S. CoastPilot 6] for address.)
- 157 Communications to the Coast Guard relating to distress and/or communications other than vessel traffic movement are made on VHF-FM channels 16 and 22; voice call, Coast Guard Sector Sault Ste. Marie.
- Repairs.—An 800-ton [720-tonne] floating drydock with a length of 110 feet [33.5 m], width of 40 feet [12.2 m], and 14½ feet [4.5 m] over the sills is 2,000 feet [610 m] SSW of Bayfield Dike Light. The yard is equipped with a 25-ton [23-tonne] floating crane and a 40-ton [36-tonne] shore crane. Hull and engine repairs are available. Above-the-waterline repairs are available at another yard 2,000 feet [610 m] NW. A 100-ton [90-tonne] crane is available.

St. Marys Falls to Gros Cap Reefs

- The route from St. Marys Falls to Gros Cap Reefs is divided into four courses marked by range lights and buoys. Pointe Louise Turn is marked by buoys and side lights.
- There are United States Coast Guard *St. Marys River VTS* reporting points for upbound and downbound vessels opposite Brush Point and Birch Point.
- There is an aeronautical rotating **light** on a water **tower** at Sault Ste. Marie airport (46°29′N, 84°30′W), 1.5 miles NW of Pointe aux Pins.
- Vidal Shoals are in the western approaches to the United States and Canadian canals. Channels to the respective canals have been dredged through the shoals.
- 163 Canadian Canal Upper Entrance range lights (1070, 1071) are on the mainland north of the canal. The route is also marked by **light buoys**.
- Shoals can be very strong, depending on water flow over the falls and the number of sluice gates open in the power canals. Mariners are cautioned to guard against being set onto the shoals.

[from U.S. Coast Pilot 6, Chapter 12, partial]

- Vidal Shoals Channel, the approach to St. Marys Falls Canal, with a depth of 28 feet [8.5 m], leads ENE from Big Point for 2.2 [1.9] miles to the canal entrance. The channel is marked by 076.2° Vidal Shoals Channel Range.
- 167 **Pointe aux Pins Course**, with a depth of 28 feet [8.5 m], extends from Big Point SW for 2.5 [2.2] miles to the turn between **Brush Point**, MI, and **Pointe aux Pins**, ON, (46°28'30"N., 84°27'54"W.). The channel is marked at the upper end by a 233.1° lighted range.

POINTE LOUISE (1998)



Leigh Bay and Pointe aux Pins Bay are on the north side of the St. Marys River, 2 and 4 miles, respectively, above the locks.

169 A submerged sewer **pipeline** extends 0.5 mile south from the NE side of Leigh Bay.

170 Pointe aux Pins range lights (1077, 1078) are on Pointe Louise. The lights lead from their intersection with the Vidal Shoals Channel range to the Pointe Louise Channel.

Pointe Louise Channel leads SSW for 0.7 mile from Pointe aux Pins to Pointe Louise, and then Pointe Louise Turn leads SW for 0.4 mile to connect with Brush Point Course. These channels have a project depth of 28 feet (8.5 m). They are marked by *Pointe aux Pins main light (1079)*, on the south end of Pointe Louise, and by other lighted aids.

172 **Caution**. — Submerged **natural gas pipelines** cross St. Marys River between Brush Point and Pointe aux Pins.

173 **Brush Point Course** extends from the Pointe Louise Turn to the turn SW of **Pointe aux Chenes**. The channel has a project depth of 28 feet (8.5 m). It is marked by *Brush Point range* (U.S. 14390, 14395) and by **light buoys**.

Birch Point to Whitefish Bay

The channel leading NW from opposite **Birch Point** (46°26′N, 84°31′W) through Point Iroquois Shoals, then west of Gros Cap Reefs into Whitefish Bay, is marked by a *light range*, a **racon**, **buoys** and **light buoys**.

175 (Gros Cap Reefs and the area north of them are described in Chapter 4.)

[from U.S. Coast Pilot 6, Chapter 12, partial]

At the turn at the upper end of Brush Point Course the dredged channel flares broadly to the west. **Birch Point Course** leads northwest from the turn for about 4 [3.6] miles to the deep water in Whitefish Bay and includes dredged cuts through Point Iroquois Shoals and Gros Cap Reefs, ON. The channel has a depth of 30 feet [9.1 m] and is marked at the lower end by a **138.6°** lighted range on **Birch Point** (46°26'00"N., 84°31'24"W.).

Waiska Bay, MI, 3 [2.6] miles W of Birch Point, has depths of 4 to 12 feet [1.2 to 3.7 m] and is used mainly by local fishermen. Submerged and partially submerged piles extend in a line across the mouth of the bay, and extreme caution is advised when entering the bay.

Lake Huron, St. Marys River, Lake Superior

- Small-craft facility.—A small-craft facility is at the north end of Waiska Bay and can provide transient slips, gasoline, diesel fuel, electricity and water. In 1987, a reported controlling depth of 2 feet [0.6 m] was available in the approaches to the facility.
- 179 **Point Iroquois Shoals**, with a depth of 17 feet [5.2 m] at the outer edge, extend from the shoreline SE of **Point Iroquois**, MI (46°29'06"N., 84°37'48"W.) NE to the edge of

the dredged channel through Birch Point Course. Buoys at the


outer edge of the shoal mark the limit of the dredged channel.

Lake Superior — East Shore

General

Chart 2300

- 1 This chapter covers the NW approaches to St. Marys River and the east end of Lake Superior from Whitefish Bay to Michipicoten Bay.
- The east coast of Lake Superior is generally rugged and bold with deep water close to shore and few outlying shoals. There are few anchorages for large vessels but small harbours with good shelter for small craft can be found every 10 to 20 miles along the coast.
- Most of the charts of Canadian waters described in this chapter are based on lead-line surveys carried out between 1902 and 1920. These charts include any dangers discovered by echo-sounder surveys of the entire area to within 3 miles of the shore, carried out by the United States in 1957 and 1958, but the sounding lines in the latter survey were spaced too far apart (1 mile) to ensure that every danger in areas of uneven bottom would have been detected.
- 4 Mamainse Harbour and approaches, Agawa and Ganley Islands, Sinclair Cove and the Michipicoten River and approaches were surveyed in 1970.
- 5 Caution. Mariners are advised to use utmost caution in the vicinity of the banks offshore between Coppermine Point and Leach Island because of the uneven bottom topography and possible uncharted shoals.
- The United States charts referred to in this chapter are based on surveys carried out between 1917 and 1966.
- Depths and elevations quoted in this chapter refer to chart datum and thus agree with charted values. Because *Charts 2307 and 2309* are based on older water level datums, depths and elevations on these charts must be corrected to refer them to the presently adopted datum for Lake Superior. The required correction is noted on the chart. More information on chart datums is given in Sailing Directions Booklet *CEN 300 General Information, Great Lakes*.
- 7.1 Real-time water level information for Lake Superior at Gros Cap is available from the *Canadian Hydrographic Service Automated Water Level Gauge*, telephone number 705-779-2052 and for Lake Superior at Michipicoten from the *Canadian Hydrographic Service Automated Water Level Gauge*, telephone number 705-856-0077. (*More information*

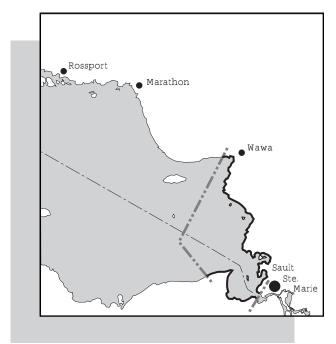

on water levels is given in Sailing Directions booklet CEN 300 — General Information, Great Lakes.)

Approaches to St. Marys River from NW

ENCs US4MI77M, US5MI77M, US5MI63M Charts 14884, 14962

8 St. Marys River is approached from NW through Whitefish Bay, entered between Coppermine Point and Whitefish Point. Ile Parisienne lies near the centre of the bay.
9 Upbound and downbound sailing courses recommended by the *Canadian Shipowners Association* and the *Lake Carriers Association* to provide traffic separation are shown on the charts. These courses converge NE of Point Iroquois.

The Canadian Shipowners Association and Lake Carriers Association recommend an anchorage with limits as follows: From a position on the Birch Point range 0.5 mile above Gros Cap, 340° for 2.2 miles, then 314° to a position 1.7 miles off Ile Parisienne light. From a position on the Birch Point range 0.5 mile above Gros Cap, 229° for 0.5 mile, then 300° for 2.3 miles, then to a position 3.1 miles off Ile Parisienne light. No downbound vessel is to proceed from this anchorage unless authorized to do so by the United States Coast Guard.

South and west sides of Whitefish Bay

[from U.S. Coast Pilot 6, Chapter 13, partial]

- Point Iroquois (46°29'06"N., 84°37'48"W.), marked by an abandoned lighthouse, is on the SE side of the bay on the W side of the entrance to St. Marys River. Nodoway Point is 2.2 [1.9] miles W of Point Iroquois. Mission Hill is a prominent 400-foot [122-m] hill between the points. A rocky ledge extends about 2 [1.7] miles north from Nodoway Point.

 There are several submerged buoys located around the outer edges of Whitefish Bay, specifically near Pendills Bay, north of Tahquamenon Bay and near Whitefish Point. These buoys float about 5 feet [1.5 m] from the lake bottom and are tethered to hydroacoustic receivers and concrete blocks. A line of floating rope is also attached to the concrete block in order to facilitate the recovery of the buoy and receiver. Mariners are urged to use caution in the vicinity of these buoys shown on chart 14962.
- 12 From Nodoway Point, the S shore of Whitefish Bay extends 7.5 [6.5] miles SW to the mouth of **Pendills Creek**, thence NW for 2.7 [2.3] miles to **Salt Point**. **Pendills Bay** is the bight formed between the points. Shoals extend about 0.4 [0.35] mile offshore in the E part of the bay and increase to 1 [0.9] mile offshore NW of Pendills Creek.

- From Salt Point W for 3.8 [3.3] miles to Naomikong Point, shoals extend 2[1.7] miles from shore, and thence the shoal limit extends NW across the mouth of Tahquamenon Bay. Naomikong Point, and Menekaunee Point close W, form the S entrance point of Tahquamenon Bay, the SW part of Whitefish Bay. A rocky ledge extends 1 [0.9] mile N from Naomikong Point and a 6-foot [1.8-m] spot is 0.5 [0.4] mile E of the point. A rocky ledge with a least depth of 4 feet [1.2 m] is 2.8 [2.4] miles N of Naomikong Point.
- Tahquamenon River flows into the W side of Whitefish Bay just N of the N entrance point to Tahquamenon Bay. A shoal which bares extends from the mouth of the river S for about 3.5 [3] miles into Tahquamenon Bay. The entrance to the river is shoal and should be approached with care. In 1981, the channel across the bar had a controlling depth of 2 feet [0.6 m]. The river is navigable by small boats for about 16 [13.9] miles. In 1963, the least depth in this stretch was 3 feet [0.9 m]. A launching ramp is on the S side of the river mouth. Fuel is available nearby.
- 15 From the Tahquamenon River N for 15.5 [13.5] miles to Whitefish Point, the shoal border decreases in width from 2.7 [2.3] miles to about 0.2 mile. Ruins of two abandoned docks extend offshore at the mouth of **Shelldrake River**, 8.5 [7.4] miles N of Tahquamenon River.
- 16 Whitefish Point Harbor, entirely artificial, is on the NW side of Whitefish Bay about 1 [0.9] mile SW of the tip of Whitefish Point. The harbor, protected by breakwaters on the N, S, and E sides, serves as a harbor of refuge for shallow-draft vessels.
- 17 Channels.—The harbor is entered from Whitefish Bay through a dredged channel leading N, then W, between the breakwaters to the S end of the basin. The outer ends of the breakwaters are marked by lights.
- 18 **Small-craft facilities.**—Transient berths for craft to 60 feet [18.3 m], and a launching ramp are available at a facility developed by the Michigan State Waterways Commission at the N end of the basin.
- Whitefish Point, on the W side of the entrance to Whitefish Bay, has sandhills and some trees. In 1978, it was reported that the point was a poor radar target. Whitefish Point Light (46°46'16"N., 84°57'26"W.), 80 feet [24.4 m] above the water, is shown from a white cylindrical tower on the point; a radar beacon (Racon) is at the light.
- 20 From Whitefish Point WSW for 20 [17.4] miles to Little Lake Harbor, the shore is sandy, wooded inshore, and generally bold. Shoals extend about 0.5 [0.4] mile from shore. None of the rivers which empty into the lake in this stretch are navigable.
- A lighthouse at **Crisp Point** and the buildings at the abandoned Coast Guard station at Vermilion Point, 4.5 [3.9] miles east of Crisp Point, are good landmarks.

22 (The coast west of Crisp Point is described in United States Coast Pilot 6.)

ENCs US4MI77M, US5MI77M, US5MI63M Charts 14884, 14962

- Gros Cap (46°32′N, 84°35′W) is the NE entrance point to St. Marys River. Radio masts with air obstruction **lights** are near by. A ridge over 400 feet (122 m) high behind Gros Cap extends 3 miles north along the coast. **North Gros Cap** is near the NW corner of this ridge.
- Gros Cap Reefs, a detached group of rocks with a least depth of 17 feet (5.2 m), lie 1.5 miles SW of Gros Cap, at the NW end of the buoyed channel to Sault Ste. Marie.

25 Gros Cap Reefs light (1081) is on a crib at the SW end of the reef. The crib has a landing pad for helicopters.

- A wreck with a depth of 38 feet (11.6 m) lies 0.8 mile NW of *Gros Cap Reefs light*.
- A **submarine power cable** is laid between Gros Cap and the *Gros Cap Reefs light*. A **submerged water pipeline** extends 0.5 mile SW from a position on shore near Gros Cap.

ENCs US4MI77M, US5MI77M Chart 14962

Ile Parisienne (46°40′N, 84°43′W) lies 8.5 miles NW of Gros Cap.



- 29 *Île Parisienne light (1082)* is on the SW end of the island.
- Parisienne Shoal, 2 miles north of Ile Parisienne, has a least depth of 5 feet (1.5 m) and is marked on its east side by a **buoy**.
- South Sandy Island and North Sandy Island, 2 miles NNE of Parisienne Shoal, are low and wooded and do not give a good radar return. **Steamboat Island** is a small islet on a **reef** that extends 1.8 miles north of North Sandy Island. There are many **boulders** around and between these islands.
- The north and south limits of **shoal** water around **Sandy Islands** are marked by **buoys**.
- Outer Pancake Shoal and Pancake Shoal, detached shoals with least depths of 13 and 4 feet (4 and 1.2 m) 8 miles NW of the Sandy Islands, are marked to the north and to the NW by buoys.
- Coppermine Point (46°59′N, 84°47′W) is the NE entrance point of Whitefish Bay. It is not prominent but Whiskey Point, 0.8 mile to the SE, shows well on radar.



- 35 Coppermine Point light (1087) is at the end of the point.
- A radio **tower** 777 feet (237 m) high 3.7 miles east of Coppermine Point has air obstruction **lights** and is **conspicuous** when bearing between 070° and 105°.

ENCs US4M177M, US5M177M, US5M163M Charts 14884, 14962

East side of Whitefish Bay

A rocky **reef** with a least depth of 4 feet (1.2 m) lies 0.1 mile west of Gros Cap.

is 236 feet (72 m) long. Timber wharves and floating fingers extending east from the wharf have depths of 5 to 6 feet (1.5 to 1.8 m). There is a launching **ramp** close east of the wharf. An offshore boulder **breakwater** 154 feet (47 m) long, 33 feet (10 m) wide and6 feet (1.8 m) high offers some shelter. The channel between the breakwater and the breakwater-wharf is marked by buoys and daymarks. This wharf is used by a commercial fishery and by pleasure craft. There is a Harbour Manager.

- 39 Gros Cap is a **Customs** vessel reporting station for pleasure craft.
- Jackson Island, 1 mile NNW of Gros Cap close to the mainland, has deep water on the offshore side.

ENCs US4MI77M, US5MI77M Chart 14962

Goulais Point, 9 miles north of Gros Cap on the west side of the entrance to Goulais Bay, is prominent. There are many cottages around the shore of the bay. Goulais River empties through a delta on the east side of the bay. Fishing nets may be encountered between Goulais Point and Ile Parisienne to the west.



42 Goulais Bay light (1083) is on the east side of Goulais Point.

Chart 2315

Hission on the SW side of the bay. This wharf was badly damaged and in poor condition in 1999. The main section of the wharf, 86 feet (26 m) long, has exposed rocks on its east side. There are depths of 2 to 4 feet (0.6 to 1.2 m) on its west side and 3 feet (0.9 m) at its outer end. There is a launching **ramp** close north of the wharf. A **crib** submerged 1 foot (0.3 m) lies 300 feet (91 m) NW of the outer end of the wharf.

Goulais Mission is part of the Batchewana First Nation of Ojibways Goulais Bay Reserve 15A.

45 **Anchorage** can be found 1 mile off the wharf, with good shelter in 42 to 60 feet (12.8 to 18.3 m), mud. The best approach is in mid-channel until the wharf is well open. Small craft can find anchorage just north of the wharf in shallower water, mud, but may experience an uncomfortable swell.

ENCs US4MI77M, US5MI77M Chart 14962

Maple Island, a low, densely wooded island 5 miles north of Goulais Point, is connected to the mainland by a

shallow **boulder reef**. A channel 9 feet (2.7 m) deep 0.1 mile east of the island leads through this reef.

- ٩.
- 47 *Maple Island light (1084)* is visible bearing north through east to south.
- 48 (Sandy Islands and Pancake Shoals, NW of Maple Island, are described earlier in this section.)
- **Batchawana Bay**, entered between **Rudderhead Point** and **Corbeil Point** (46°53′N, 84°37′W), is divided into inner and outer sections by **Batchawana Island**. There are many cottages around the shores of the bay but none on the island (1986). There is a provincial park at the head of the outer bay.
- 50 A **buoy** marks the limit of **shoal** water south of Corbeil Point.
- There is a Public **wharf** just inside the point 1.4 miles NE of Corbeil Point. The wharf, 15 feet(4.6 m) wide, extends 115 feet (35 m) north from the shore to an L-section 95 feet (29 m) long. In 1999, there were depths of 8 to 12 feet (2.4 to 3.7 m) along the north face. There is a launching **ramp** near by. Gasoline in drums can be obtained at the Public wharf by arrangement with *Buckeye Resort* (1999).
- The submerged **cribs** of old logging piers lie east and west of the Public wharf at Corbeil Point. A **buoy** lies NE of the wharf.
- A church 0.5 mile NW of the wharf is prominent.
- Anchorage can be found at the head of the outer part of Batchawana Bay NE of the Public wharf. There is good shelter from all except south winds in 30 to 90 feet (9.1 to 27.4 m), sand. Small craft can find protected anchorage behind the Public wharf.
- The settlement of **Batchawana Bay** is on the west shore of Batchawana Bay, SW of **Stony Point**. There is a post office, a grocery store and a laundromat. There are several motels and restaurants in the area (1999).
- *Batchawana Bay Air Services*, next to *Buckeye Resort*, operates charter floatplanes from their wharf and can provide transportation to Sault Ste. Marie. The business also provides aviation gasoline for sale to visiting aircraft.
- Batchawana River, flowing into the NE part of the outer bay, is navigable by shallow-draught craft for several miles. Sandbars, submerged 1 foot (0.3 m) (1986), lie in the entrance channel. A shifting sandbar obstructs the mouth. *Highway 17* bridge, 0.3 mile upstream, has a vertical clearance of 7 feet (2.1 m). Resorts near the bridge offer some facilities for small craft. There is a grocery store near the bridge (1999).
- The deep channel north of Batchawana Island leading to **Harmony Bay** is 0.2 mile wide. There are depths of up to 9 feet (2.7 m) across the flat south of Batchawana Island into the inner bay.
- Chippewa (Harmony) River had depths of 1 foot (0.3 m) (1986) over a sand bar at its mouth, and depths of

- 5 to 10 feet (1.5 to 3 m) for 1 mile upstream to **Chippewa Falls**. The *Highway 17* bridge over the river has a clearance of 21 feet (6.4 m).
- Small craft can find protected **anchorage** in Harmony Bay in 36 to 84 feet (11 to 25.6 m), mud, and in **Havilland Bay**, the south end of the inner bay. Stay 0.1 mile offshore of the reeds and grass which line the bay.
- 61 Patty's Gitchee Gumee Marina Restaurant, on the south shore of Havilland Bay, has a very snug well-sheltered small-craft harbour. The entrance to the marina is marked by **buoys** and by a red **light** on shore; these aids are privately maintained.
- *Patty's Gitchee Gumee Marina Restaurant* is a **Customs** vessel reporting station for pleasure craft.
- There is a concrete launching **ramp**, 15 feet (4.5 m) wide, 2.5 miles NE of Havilland Bay. This ramp is protected by an armour-stone **breakwater**, elevation 3 feet (0.9 m), and has a small wharf alongside.
- The area has interprovincial bus services. Buses may be flagged down on *Highway 17*. Notify the carrier in advance if possible.
- Pancake Point, 5.5 miles NW of Corbeil Point on the west side of Pancake Bay, is prominent from the west. There is a provincial park at its head.
- Whiskey Rock, with a depth of 3 feet (0.9 m), lies 0.3 mile offshore west of Pancake Point.

Coppermine Point to Montreal River

Chart 2307

- (Coppermine Point light and the radio tower east of the point are described earlier in this chapter.)
- 68 **Coppermine Rock**, 27 feet (8.2 m) high, is clear on the north and east sides. There is **shoal** water and a small **rock** 1 foot (0.3 m) high to the SSE, and a **shoal** patch to the NNW. **Rousseau Island**, 0.3 mile NNW of Coppermine Point, is 20 feet (6.1 m) high.
- 69 **Hibbard Bay** lies 2 miles NNE of Coppermine Point. A mine headframe (*not shown on the chart*) 0.7 mile east of Hibbard Bay is prominent from SW.
- Hibbard Rock, off the mouth of Hibbard Bay, is 12 feet (3.7 m) high.
- Rousseau Bank, 5 miles NW of Coppermine Point, has depths of 5 fathoms (9.1 m).

Chart 2315

Mamainse Island $(47^{\circ}02'N, 84^{\circ}47'W)$ is the largest of a group of islands NW of **Mamainse Point**.

MAMAINSE HARBOUR (1998)



light.

73 Mamainse Harbour light (1088) is near the north end of Mamainse Island. There is a **racon** at the

Mamainse Harbour, a safe refuge, is sheltered on the west and south by the islands mentioned above. It is sheltered to the NE by a rock **breakwater** that connects the north end of a low sparsely wooded island to the mainland on the east. The harbour is entered from the north between Mamainse Island and this low island.

An entrance channel 40 feet (12.2 m) wide has been dredged to a depth of 5 feet (1.5 m) through rock. A depth of 3 feet (0.9 m) lies NE of the island forming the south end of the harbour. The area south of the harbour is **foul**. The harbour is used regularly by fishing tugs of 50 to 70 feet (15 to 21 m) length, drawing up to 5 feet (1.5 m).

Overhead cables with clearances of 20 to 31 feet (6.1 to 9.4 m) extend along the east side of Mamainse Island and across the south end of the harbour.

77 The Public **wharf** at Mamainse is 300 feet (91 m) long with depths of 6 to 8 feet (1.8 to 2.4 m). The deck elevation is 3 feet (0.9 m). South of the Public wharf there are private fishery **wharves**.

78 **Caution.** — There is a **rock and gravel shoal** alongside the wharf 75 feet (22.6 m) from the south

end. The shoal has a least depth of 2 feet (0.6 m), 2 feet (0.6 m) off the wharf, and is 30 feet (9.1 m) in diameter.

Diesel fuel and gasoline in drums, and ice, can be obtained by arrangement with the local fish-processing plant. The nearest grocery store is in the settlement of Pancake Bay, 11 km SE by highway.

Chart 2307

Mica Shoal, 4 miles NNW of Mamainse Point, has boulders with a depth of 15 feet (4.6 m) and is marked by a buoy. Siesta Shoal, with a depth of 25 feet (7.6 m), lies 3 miles farther NNW.

81 Coppermine Point light in line with the west side of Rousseau Island, bearing 156½°, leads west of Mica and Siesta Shoals.

Mica Bay, 5 miles NNE of Mamainse Point, is quite open. There are rock paintings 20 feet (6.1 m) above the water on a rock face here.

Pointe aux Mines, 2 miles NNW of Mica Bay, and Theano Point, 2.5 miles farther NNE, have noticeable pink rock bases.

Ossifrage Island, quite bare, lies SW of Theano Point. There is a channel between but it is obstructed by a **shoal** with depths of 9 feet (2.7 m).

Anchorage, limited along this shore, can be found in **Alona Bay** off the south side of Theano Point in 12 to 15 fathoms (21.9 to 27.4 m), mud.

A light-coloured cliff 2.5 miles NE of Theano Point is conspicuous.

Montreal Shoal, 3 miles NNW of Theano Point, has 87 a depth of 7 feet (2.1 m).

The NE point of Montreal Island in line with the west side of Barrett Island, bearing 001°, leads close east of Montreal Shoal.

Montreal River (47°15′N, 84°39′W), 4.5 miles NE of Theano Point, is the site of a large hydro-electric dam. The river is obstructed by rapids and the power-station dam 0.1 mile upstream. The river empties into the head of a small bay which lies between two rocks 100 feet (30 m) high. The south point is prominent.

90 Montréal Point light (1089) is on the south point.

91 There are two radio **towers** with air obstruction **lights** 2 miles ENE of Montréal Point light.

There are two shingle beaches separated by an entrance channel 100 feet (30 m) wide at the mouth of Montreal River. There is a boat basin on the south side just inside the entrance. Winter ice, westerly storms and river currents sometimes alter the shoreline considerably here. A bar in the channel has a reported depth of 5 feet (1.5 m) (1999)

but winds and currents (see below) cause shifting of the bar and variations in the depths. Safe passage through the channel requires local knowledge. Guidance can be obtained from Trails End Lodge.

93 **Caution**. — The channel is impassable in westerly winds due to breaking seas caused by the wind interacting with the current.



Caution. — Strong currents can make passage through the entrance channel hazardous. These currents vary in strength according to power dam operations. Water levels inside the mouth of the river and in the boat basin are affected by the tailrace as well. The tailrace is least on weekends when the power dam conducts ponding operations. Contact Trails End Lodge for more in-



formation.

Caution. — There are reported to be several large boulders just offshore in the entrance.




Trails End Lodge is at the SE end of the boat 96 basin.



97 There are submerged **cribs** of a ruined wharf outside the river entrance on the south side. There is a rock 7 feet (2.1 m) high at the north end of the ruins. A Public wharf on the south side of the basin is also in ruins (1999). There are three **crib** structures remaining, each 10 feet (3 m)

wide and extending 40 feet (12 m) from the shore, with depths

MONTREAL RIVER (1998)

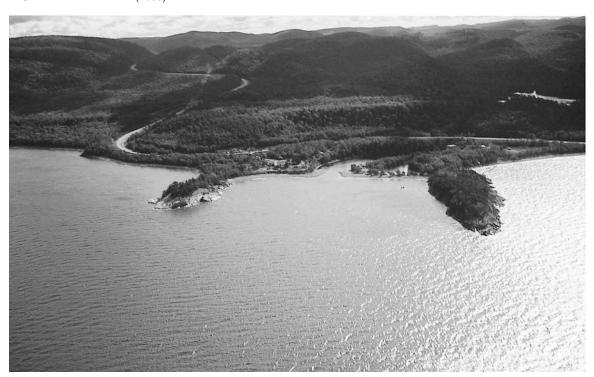

of 6 feet (1.8 m) at the outer ends. These cribs are usually submerged.

Montreal River to Cape Gargantua

- 98 Unsheltered **anchorage** can be found 1 mile NE of the mouth of the Montreal River in 7 fathoms (12.8 m) on the bank extending 0.2 mile offshore. **MacGregor Cove**, 3 miles farther NE, offers **anchorage** in 10 to 12 fathoms (18.3 to 21.9 m), sand bottom. Fair **anchorage** can be found in the channel between **Vrooman Islands** and the mainland.
- Montreal Island $(47^{\circ}19'N, 84^{\circ}44'W)$ is surrounded by a narrow shallow bank. The island looks like a low flat box from the south
- Griffon Reef lies 1.5 miles north of the NW point of Montreal Island.
- The SW point of Montreal Island in line with Theano Point, bearing 166°, leads west of Griffon Reef.
- Island, has clean sandy shores. The bay offers **anchorage** with fair shelter.
- 103 Lake Superior Provincial Park extends from Agawa Bay to just south of Michipicoten River.
- There are no marine facilities in the park. Mariners may anchor without charge in any of the harbours within the park boundaries; park fees must be paid to go ashore.
- Agawa River is 50 feet (15 m) wide at its mouth. Depths of 4 feet (1.2 m) can be found as far as the rapids 0.1 mile upstream.
- 106 **Agawa Islands**, west of **Agawa Point** (47°21′N, 84°40′W), have many small **rocks** around them. Some of these rocks are submerged.
- Ganley Island lies close to shore NE of Agawa Islands.
- Small craft can find good **anchorage** in the channel between Ganley Island and the mainland, with excellent shelter from westerly winds, in depths of 15 to 20 feet (4.6 to 6.1 m). The north entrance is recommended. The anchorage is north of the southern part of Ganley Island.
- There is an Indian pictograph 8 feet (2.4 m) above the water on the face of a rock on the mainland shore north of the north Ganley Island. The rock is known as **Agawa Rock**.

Chart 2315

Sinclair Island (47°23′N, 84°43′W), 1 mile NNW of the largest Agawa Island, is mostly bare rock.



111 Sinclair Island light (1089.5) is on the SW part of the island.

- Sinclair Cove, entered south of Sinclair Island, has little shelter from west or SW seas and should be used only in settled weather.
- There is a concrete launching **ramp**, protected by a small **breakwater**, on the south shore of the cove.
- Sinclair Cove is in *Lake Superior Provincial Park*. Fuel and supplies are not available.

Chart 2307

- Barrett Island, 0.5 mile north of Sinclair Island, has deep water on its west side but is **shoal** on its north, east and south sides.
- Ganley Rock, depth 19 feet (5.8 m), is the NE of three shoals midway between Barrett Island and Lizard Islands.
- Lizard Islands, a group of seven low islands on a shallow bank, includes **South Lizard Island** and **Rowe Island**. **Minnie Reef** and **Barr Reef** are dangers on the west side of the bank. Passage should not be attempted between the islands.



- 118 Rowe Island light (1090) is on the NNE tip of the island.
- The NE side of Leach Island in line with the west side of Hursley Island, bearing 327°, leads west of Minnie Reef.
- Sand River, east of Lizard Islands, is unnavigable because of rapids near its mouth. A prominent light-coloured sand beach 1 mile long extends NW from Sand River.
- Bald Head (47°29′N, 84°49′W), an easily identified promontory 5 miles NW of Sand River, is densely wooded despite its name.
- Bald Head has a remotely controlled Canadian Coast Guard marine radio station. For scheduled marine information broadcasts, contact the *Sarnia MCTS Centre*, call sign *VBE*. Direct all calls to *Sarnia Radio*. (Consult Radio Aids to Marine Navigation (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic) for more information.)
- The mouth of **Baldhead River** is obstructed by a sand bar with a limiting depth of 2 feet (0.6 m) (1974).
- Leach Island, 4.5 miles WNW of Lizard Islands, is surrounded by shoal water. A reef extends 0.5 mile south of the island. Miron Bank, SSW of Leach Island, has a depth of 5 fathoms (9.1 m). Sparrow Shoal, a detached shoal 1 mile west of Leach Island, has a depth of 13 feet (4 m).
- 125 The north point of Leach Island in line with the summit of Bald Head, bearing 083°, leads0.3 mile north of Sparrow Shoal.
- The south point of Leach Island in line with the NE point of Montreal Island, bearing 127°, leads close SW of Sparrow Shoal.

- Ella Islet, 1.1 miles north of Leach Island, is small and wooded and surrounded by an extensive area of **rocks** and **shoal** water.
- Beatty Cove, on the mainland ENE of Ella Islet, is small and suitable only for small craft. **Telegraph Rock**, west of Beatty Cove, is 7 feet (2.1 m) high and surrounded by deep water.

Chart 2315

Gargantua Island, 50 feet (15 m) high, lies in Gargantua Bay in the entrance to Gargantua Harbour. The island has deep water on its south side but a rock submerged 4 feet (1.2 m) lies 250 feet(76 m) off its west side.



- 130 Gargantua light (1091) is on the summit of the island.
- 131 A **rock** with a depth of 4 feet (1.2 m) lies 0.1 mile SW of the point on the SW side of the harbour.
- Gargantua Harbour has a sandy beach and cottages at its head. A **wreck** at the north end of the harbour is partly exposed, showing 1 foot (0.3 m) above the water (1974). **Wharves**, a float, and buildings on the SW side of the harbour are in ruins. Fuel and supplies are not available.
- Gargantua Harbour can be entered north or south of Gargantua Island. The south entrance is free of shoals.
- Anchorage can be found NE of the island, with fair shelter, in 42 to 60 feet (12.8 to 18.3 m), sand. Small craft can anchor farther into the harbour, with good shelter in all weathers, in 30 to 48 feet (9.1 to 14.6 m), mud.

Chart 2307

- Many small islands, **reefs** and **shoals** lie close offshore between Gargantua Harbour and Cape Gargantua, 3.5 miles to the NW. There is a good channel between the islands and the mainland but dangers are not marked and local knowledge is required.
- Devil's Warehouse Island, the largest of the islands, is easily identified by its high and steep eastern side. A large cave, mentioned in Indian legends, is on the north side of the island. Wilde Island, Dixon Island, Fawcett Island, Peerless Island, Alexander Reef, Pearson Island and Wadena Shoal are islands and shoals near Devil's Warehouse Island.
- 137 **Anchorage** can be found in **Warp Bay** (47°35′N, 85°00′W), with good shelter but limited room to swing, in 7 fathoms (12.8 m), mud. The bold point on the SW side of the bay bearing 040° leads between Pearson Island and Alexander Reef. The preferred route passes close to the SW entrance point to avoid Wadena Shoal.
- Jordan Island lies 0.5 mile NW of Pearson Island. **Pannikin Shoal**, 0.2 mile WSW of Jordan Island, is the only detached shoal outside the islands.

Hursley Island (47°36′N, 85°03′W), close west of Cape Gargantua, has two summits and from a distance appears to be two islands.



140 Hursley Island light (1092) is at the northern end of the island.

Cape Gargantua to Michipicoten Bay

Chart 2309

- Cap Chaillon and Brulé Point are the only major features between Cape Gargantua and Michipicoten Harbour, 22 miles to the north. There are no off-lying dangers along this part of the coast. The bays, with the exception of Brulé Harbour, are open and offer little protection. Depths of 30 to 60 fathoms (55 to 110 m) are found close inshore from Brulé Point north to Michipicoten Bay. There is no anchorage.
- 142 **Cape Gargantua** $(47^{\circ}36'N, 85^{\circ}02'W)$ is prominent only from the south. A group of dry **rocks** 0.2 mile west of the north part of the cape are surrounded by deep water.
- Cape Rock, 0.3 mile north of Cape Gargantua, is a small submerged rock with two summits.
- Anchorage can be found in the cove SSE of Cape Rock, with shelter from west and south winds, in 6½ fathoms (11.9 m), sand bottom.
- 145 **Indian Harbour** is in the SE corner of the bay between the north tip of Cape Gargantua and **Ryan Point**. **Chalfant Island** is the southernmost of the islands in this bay.
- 146 **Anchorage** can be found in Indian Harbour in 5 fathoms (9.1 m), mud. Although restricted in area, there is perfect shelter from all winds.
- Indian Harbour can be approached on a SE course, heading for the bluff point to the south of Chalfant Island. There is deep water close to the point; a **rock**, almost awash, lies 450 feet (137 m) to the east. The anchorage is in the west bay, entered between the point and the rock and then between a small group of islands and the point.
- 148 **Squaw Island**, 1.5 miles north of Cape Gargantua, lies off Ryan Point. **MacKinnon Bank** lies NW of Squaw Island.
- 149 A weak local **magnetic anomaly** has been noted on MacKinnon Bank.
- 150 **Cap Chaillon**, 6 miles north of Cape Gargantua, is easily identified from the south by its bold well-defined bluff rising in a series of short steps from the lake. From the west its definition is lost against the higher hills in the background.
- Red Rock River, 2 miles SE of Cap Chaillon, gets its name from a red rock, 100 feet (30 m) high, jutting into the lake. A sand beach extends 1 mile south of the river mouth.
- Grindstone Point, 2 miles NE of Cap Chaillon, is low and gravelly and is fringed by a shallow **boulder** bank

MICHIPICOTEN HARBOUR (1998)



0.2 mile wide. Between Grindstone Point and **Old Woman Bay**, 4 miles to the NNE, the coast is lined with steep cliffs 300 to 400 feet (91 to 122 m) high, rising sheer from the water. The water is deep close in. These cliffs show conspicuous patches of red-coloured rock. A waterfall 2 miles NE of Grindstone Point is prominent.

Old Woman Bay, the site of provincial camping and picnic grounds, is free of shoals, deep and completely open to westward. A small **rock**, 1 foot (0.3 m) high, lies 0.1 mile south of the NW entrance point of the bay. **Old Woman River** empties into the head of the bay through a gravel beach.

Brulé Point (47°49'N, 84°57'W), 7 miles NNE of Cap Chaillon, is not very prominent. Brulé Hill, 2 miles ENE of the point, is **conspicuous** because of its elevation.

155 **Brulé Harbour**, 1 mile SSE of Brulé Point, offers good shelter. **Entrance Island** has deep water close to its west and north shores but shoal water off its south point. The harbour is entered north of Entrance Island through a channel 0.1 mile wide. A vessel approaching from the NW must steer towards the high cliffs south of Old Woman Bay until the entrance to Brulé Harbour becomes visible.

The harbour has two arms, the northern one being larger and easier to enter. The south arm is a small bay entered through a narrows 50 feet (15 m) wide with a least depth of 4 fathoms (7.3 m). There is a **rock**, submerged 5 feet (1.5 m), just inside the narrows, close NE of the SE entrance point.

Sunken **pilings** extend from the south and east shores of the south arm.

Anchorage can be found near the north end of the north arm, with good shelter, in 13 fathoms (23.8 m), and in the south arm, with excellent shelter, in the same depth. Anchorage in the south arm is suitable only for small craft because of the narrow entrance and limited swinging room. Holding is reported to be poor in some parts of the south arm. The usual route to the southern anchorage leads 300 feet (91.4 m) beyond the SE entrance, because of the submerged rock, and then eastward to the middle of the bay.

Beauvier Point, 1.6 miles NNE of Brulé Point, is low and shelving. The water is deep close to shore. Cliffs rise to 300 feet (91 m) behind the point. **Noisy River**, not navigable, enters the lake 1 mile to the ENE.

Michipicoten Bay

Charts 2315, 2309

Michipicoten Bay, 6 miles NNE of Beauvier Point, has no outlying dangers but is exposed. Michipicoten Harbour is in the NW corner of the bay and the mouth of the Michipicoten River is at the SE end.

MICHIPICOTEN RIVER (1998)





Caution. — There is no shelter from southerly gales for large vessels anywhere in Michipicoten Bay.

Chart 2315

Perkwakwia Point $(47^{\circ}56'N, 84^{\circ}55'W)$ is high and bold with deep water close to shore. The point is prominent from westward.



Michipicoten Harbour light (1093) is on the 162 SW corner of Perkwakwia Point. The tower is difficult

163

Oakes Cove is 0.6 mile north of Perkwakwia Point. Caution. — A submerged telephone cable crosses Oakes Cove from a position close west of the south entrance point NNW to the north shore.



Shallow-draught craft can find anchorage in Oakes Cove with good shelter and holding, sand bottom, but care is necessary to avoid the submerged cable.



Anderson Fisheries wharves, in the north part of the cove, are 45 feet (14 m) long and 15 feet (4.6 m) apart. Depths of 4 feet (1.2 m) lie between the wharves.



167 Caution. — There are submerged cribs near the wharves.

Michipicoten Harbour, in the NW corner of the bay, was formerly an important port for shipping ore and receiving limestone and coal.

Caution. — South and SW gales cause heavy seas in the harbour. It is dangerous for even large vessels to approach the wharves under these conditions.

Clergue Island is the larger of two small islands in 170 the NE part of the harbour.

Michipicoten Harbour range (1094, 1095) is at the head of the harbour. The lights are operated as required. There are no daymarks.

The ore-handling **wharf** is 1,500 feet (457 m) long with a depth of 20 feet (6.1 m) at the outer 1,300 feet (396 m). Ore piles near the wharf are **prominent** (1999).

There is a privately maintained light at the 173 outer end of the wharf. This light is in disrepair (1999). The commercial wharf east of the ore wharf

The settlement of **Michipicoten** is on the east side of the harbour. The nearest post office, express office, bank

is in ruins. Only rows of pilings remain (2010).

and hospital are at Wawa, 8 km to the NE. Wawa is on the Trans-Canada Highway and on bus routes linking Sault Ste. Marie and Thunder Bay. There is an airfield at Wawa.

Michipicoten River is navigable by small craft as far as the settlement 1 mile above the entrance.

The entrance to the river has strong **currents** and a shifting sand **spit**. A **reef** extends south of the peninsula on the NW side of the river entrance. There is a concrete **crib** 5 feet (1.5 m) high on this reef. There is a **channel** to the settlement. The channel is prone to **silting**, minimum depth in this channel is reported to be 5 feet (1.5 m) (1999). The tailrace of a small power dam enters Michipicoten River, from the north, 0.4 mile inside the entrance. *Buck's Marina* monitors VHF Channel 68 and is available to assist mariners.

1

180 Michipicoten River Entrance light (1092.5) is on the crib on the NW side of the entrance.

The settlement of **Michipicoten River** is 1 mile from the river entrance. Wawa is 8 km away by paved road.

Historical note. — The site of an abandoned *Hudson's Bay Company* fur trading post is 1 mile farther up the river. This post was the starting point for the "fur brigades" who followed the canoe route to the tidal waters of James Bay.

183 The Public **wharf** at the settlement is a timber pile structure 160 feet (49 m) long. In 1997, this wharf had reported depths of 1 to 3 feet (0.3 to 0.9 m).

184 Buck's Marina operates the services at the Harry McCluske Municipal Marina, 0.1 mile west of the Public wharf. The facility is enclosed by **breakwaters** on the SE shore of the river. There is a children's playground at the marina and camping is available near by.

Lake Superior — NE Shore


General

Chart 2300

- This chapter covers the NE section of Lake Superior from Perkwakwia Point (47°56′N, 84°55′W) to Bottle Point (48°45′N, 86°52′W), including Caribou and Michipicoten Islands.
- The NE coast of Lake Superior is generally rugged and bold with deep water close to shore and few outlying shoals. There are few anchorages for large vessels but small harbours with good shelter for small craft can be found every 10 to 20 miles along the coast.
- 2.1 **Light buoy**. An *Ocean Data Acquisition System (ODAS)* meteorological light buoy, marked 45004, is moored in mid-lake 32 miles NW of Caribou Island.
- 3 Caution. There are no facilities for small craft between Michipicoten River and Rossport. The only commercial shipping facilities are at Marathon and Heron Bay. Small craft planning a passage along this shoreline must be sturdy and well equipped and have sufficient provisions.
- 4 Most of the charts of Canadian waters described in this chapter are based on lead-line surveys carried out between 1902 and 1920. These charts include any dangers discovered by echo-sounder surveys of the entire area to within 3 miles of the shore, carried out by the United States in 1957 and 1958. The sounding lines in the latter survey were spaced too far apart (1 mile) to ensure that every danger in areas of uneven bottom would have been detected.
- Depths and elevations quoted in this chapter refer to chart datum and thus agree with charted values. Because *Charts 2304, 2306, 2308, 2309, 2310 and 2318* are based on older water level datums, depths and elevations on these charts must be corrected to refer them to the presently adopted datum for Lake Superior. The required correction is noted on the chart. More information on chart datums is given in Sailing Directions Booklet *CEN 300 General Information, Great Lakes*.
- 6 A survey of the area of shoals that extends from Southwest Bank northward past Caribou Island to Michipicoten Island was carried out in 1976.



7 **Caution**. — Mariners are advised to use utmost caution in the area between Michipicoten and

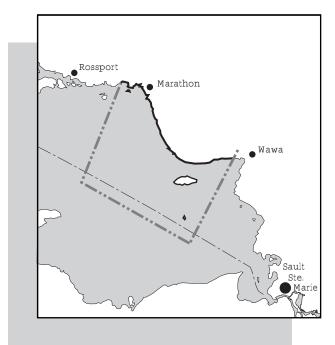

Lake Huron, St. Marys River, Lake Superior

Caribou Islands because of the uneven bottom topography and possible uncharted shoals.

Offshore dangers

Superior Shoal

8 **Superior Shoal** $(48^{\circ}06'N, 87^{\circ}10'W)$, in the middle of Lake Superior, was found in 1930. The shallowest spot of 6.2 m, rock, is 30 m in diameter and can be seen from above. A spot submerged 8.9 m lies 0.6 mile SSW of this danger. The water is deep right up to the shoal; soundings give no warning. Superior Shoal should be given a wide berth at all times.

Michipicoten Bay to Pilot Harbour

Chart 2309

- This stretch of coast is broken only by slight indentations and is free of outlying dangers. The bottom drops off steeply. A **spit** with less than 20 fathoms (37 m) projects 1.5 miles south of Dog Harbour. The land rises less abruptly than on the neighbouring east coast of Lake Superior. The hills are rounded in appearance and more uniform in height. **Doré Bay**, between Perkwakwia Point and **Doré Point**, has a long sand beach near its NE corner. The **Doré River** falls, high in the hills several miles from the river's mouth, are visible from the south.
- Mountain Ash Hill, 8 miles WNW of Doré Point, is a good landmark but is not easily identified except from due south.
- 12 **Dog** (University) River $(47^{\circ}58'N, 85^{\circ}12'W)$, 2 miles SW of Mountain Ash Hill, is in a steep valley and has a sand and gravel beach at its mouth. The river is not navigable because of a shifting bar at its mouth and rapids 0.5 mile upstream.
- Dog Harbour, entered 1 mile SW of the mouth of Dog River, is reported to offer anchorage with good protection in 8 feet (2.4 m), sand, for craft under 35 feet (11 m) long. Vessels anchor here with their sterns secured to shore.
- 14 **False Dog Harbour**, the small bay close west of Dog Harbour, offers **anchorage** for small craft in 12 feet (3.7 m), sand, gradually shoaling to the west. This anchorage is open to the SE and east.
- A white pyramidal **daymark** on the south entrance point of False Dog Harbour is not visible north of a bearing of 055°.

- A cluster of small **rocks**, just above water, lies 0.1 mile south of the south entrance point of the harbour. A **rock** submerged less than 6 feet (1.8 m) lies close SE of the same point. A small **rock** just above water lies inside the harbour close to the south shore.
- 17 A course of 304° from eastward, heading for the middle of the entrance of the harbour, will avoid the abovementioned dangers.
- Point Isacor, 7 miles WSW of Dog Harbour, is most prominent from eastward. Conspicuous sheer cliffs, dark-coloured and wooded, line the coast NE of the point. North of Point Isacor there is a high range of hills. The highest point is **Bare Summit** but it is not prominent.

pilot Harbour, 8 miles west of Point Isacor, offers anchorage for small craft, with perfect shelter, in 8 to 11 feet (2.4 to 3.4 m), sand. Craft up to 40 feet (12.2 m) long can lie alongside a rock face on the south side of the harbour near the ruins of a cabin (1982). Shoal water extends 0.1 mile south and SSW of the island sheltering the harbour.

There is a stone cairn on the west entrance point to the harbour. It is not visible west of a bearing of 025°.

Michipicoten Island, North Side

Charts 2309, 2310

Michipicoten Island (47°45′N, 85°45′W), heavily wooded, is 30 miles WSW of Michipicoten Harbour and 8 miles south of the mainland shore.

22 Michipicoten Island light (1097) is shown on Point Maurepas. The light is known locally as East End light.

Charts 2308, 2309, 2310

- Bonner Head, near the centre of the north side of Michipicoten Island, rises abruptly to 700 feet (213 m). It is conspicuous and is easily identified on radar.
- Anchorage can be found in the bay west of Bonner Head, with good holding and good shelter from south or SE gales. Anchorage can also be found in the bight east of the same headland, with good shelter in SW winds, in 5 to 10 fathoms (9.1 to 18.3 m), sand.
- Quebec Mines, on the NW side of the island, once produced large amounts of copper ore but is now abandoned.
- A **shoal** patch lies 0.8 mile offshore near Quebec Mines. The least depth is 22 feet (6.7 m).
- A bare outcrop of rock 936 feet (285 m) high, 1 mile ESE of Quebec Mines, is the highest point of Michipicoten Island.
- Quebec Rocks consist of scattered groups of submerged and dry rocks up to 0.5 mile offshore at Quebec

Mines. Vessels should keep at least 1.5 miles offshore from here to the SW point of the island. A fine gravel beach on the shore south of the northeasternmost group of Quebec Rocks can be approached but local knowledge is advised. **Schafer Bay** (47°44'N, 85°57'W), 2 miles SW of Quebec Mines, has low **rocks** up to 0.5 mile offshore west and NW of its north entrance point.

Anchorage for small craft can be found in Schafer Bay in 5 to 10 fathoms (9.1 to 18.3 m), good holding ground, but it is exposed to westerly winds. In easterly winds, small craft can find anchorage in Cotton Cove, 1 mile to the south.

Caribou Island

Chart 2310

- Caribou Island $(47^{\circ}22'N, 85^{\circ}49'W)$, 49 miles NW of Whitefish Point and 19 miles south of Michipicoten Island, is mostly sand and gravel. It is wooded along its eastern part with birch, spruce and balsam. The north and south points of the island are low and sandy; the north point is difficult to distinguish at any distance.
- Depths of 4 fathoms (7.3 m) or less are found up to 1.5 miles off Caribou Island. There are least depths of 51/4 fathoms (9.6 m) on **North Bank**, 4 miles north of the island.
- Lighthouse Island lies 0.6 mile SW of Caribou 33 Island and is composed of granite boulders6 feet (1.8 m) high.



Caribou Island light (1096) is on Lighthouse Island.

Off-lying banks

- Five off-lying banks, named according to their dir-35 ection from the island, have depths of 6 to 12 fathoms (11 to 21.9 m). These five banks are Southeast Bank, Southwest Bank. West Banks. West Patch and Northwest Banks. McMillan Bank, Chummy Bank, The Hummock and Butch Bank, with depths of 8 to 20 fathoms (14.6 to 37 m), lie between Caribou and Michipicoten Islands.
- Caution. Extreme care is necessary in the area between Michipicoten Island and Caribou Island due to possible uncharted shoals.

Michipicoten Island, South Side

Charts 2309, 2310

- Cozens Cove (Cozens Harbour), 1.7 miles SW of 37 Point Maurepas, previously described, offers shelter for small craft but is quite open to the south.
- East Sand Bay $(47^{\circ}43'N, 85^{\circ}40'W)$ has an islet and a shoal off its south entrance point and a group of dry rocks near its centre.

Small vessels can find anchorage between the above-mentioned rocks and the west head of East Sand Bay, with good shelter from NW and west winds, in $6\frac{1}{2}$ fathoms (11.9 m), sand.

Charts 2308, 2309, 2310, 2315

Approaches to Quebec Harbour

- False Harbour lies 3.5 miles west of East Sand Bay and 1 mile east of the entrance to Quebec Harbour; it is shallow. West Sand Bay lies west of Quebec Harbour.
- Black Rock is 0.4 mile offshore midway between West Sand Bay and the west end of Michipicoten Island. Black Rock consists of two dry rocks; the eastern rock is 4 feet (1.2 m) high, bare, round, smooth and dark in colour. Andesite Island is west of Black Rock.
- Hope Island, Davieaux Island and Stack Island lie south of Quebec Harbour, 0.7 mile offshore. A rock submerged 23 feet (7 m) lies midway between Hope and Davieaux Islands.



- Davieaux Island light (1098) is on the north side of the island.
- Ship Island, Green Island, The Breeders and Antelope Rock form a string of islands and rocks west of Stack Island. A deep channel runs close to the south coast of Michipicoten Island between this string of islands and a group of near-shore rocks and shoals that includes Andesite Island and Black Rock.
- Davieaux Island light open north of The Breeders, bearing 095°, leads into the channel from the west.

Michipicoten Island, West End light (1101) is on West End Island, close off the SW end of Michipicoten Island.

Chart 2315


Davieaux Island with fair shelter from all winds in Large vessels can find anchorage north of 25 to 30 fathoms (46 to 55 m), mud. The best approach is through the channel between Stack and Ship Islands.

QUEBEC HARBOUR (1998)



Quebec Harbour


- 49 **Quebec Harbour** $(47^{\circ}43'N, 85^{\circ}48'W)$ offers good shelter in all winds. There is no settlement and no supplies or facilities. There is a sharp turn at the inner end of the entrance channel that limits vessel length to less than 300 feet (91 m).
- The entrance channel is marked by **buoys**. A **rock** submerged 9 feet (2.7 m) lies near the middle of the south end of the channel.



52 **Caution.**—There is a **magnetic anomaly** at the entrance to Quebec Harbour. Variations of 14° west and 7° east were observed at the west and east entrance points of the harbour, respectively (1973).

are on the north shore of the harbour. The lights in line lead through the passage between Hope and Davieaux Islands and through the entrance channel.

A white daymark **range** on the east side of the entrance channel, in line bearing 050°, leads to the intersection with the light range.



Fisheries are on the NE side of the harbour. The wharf is decayed and depths of 8 to 10 feet (2.4 to 3.0 m) are reported alongside (1998). There are two private **wharves** on the north shore of the harbour, one west and one east of the front range light. The former is 180 feet (55 m) long, the latter is 60 feet (18 m) long with a 30-foot (9.1-m) L-end, 6 feet (1.8 m) wide. The east wharf is reported to be in ruins (1998). A private **wharf**, on the south side of the harbour 0.6 mile SE of the front range light, has an L-shaped end section 45 feet (14 m) long with a depth of 8 feet (2.4 m) alongside this face.

There are three **wrecks** in the SE end of the harbour.

Pilot Harbour to Otter Island

Chart 2309

The coast between Pilot Harbour (47°55′N, 85°35′W), previously described, and Otter Head,21 miles to the WNW, is bold with no outlying shoals and may be approached to

0.5 mile. The land is wooded with second growth poplar, birch and spruce. The hills reach a height of over 800 feet (244 m) but there are no prominent peaks.

There is a small **anchorage** between the large central island and the mainland at the mouth of **Pipe River**, 4 miles west of Pilot Harbour. The anchorage is shallow and open to the SE. It is approached from the east, keeping north of the easternmost islands. There is a small-craft **anchorage** off the **wharf** ruins on the NE side of the SW arm of **Redsucker Cove**, 0.7 mile WNW of Pipe River, in 1 to 6 fathoms (1.8 to 11 m), mud. This anchorage is open to the SE.

Ganley Harbour (47°56′N, 85°43′W), 1.3 miles west of Pipe River, offers good protection from all winds for small craft.

A bare **rock** 10 feet (3 m) high 0.3 mile to the SW and a privately maintained starboard hand **daybeacon** on a small island in the entrance are useful in identifying Ganley Harbour. The rock is visible from east or west. The daybeacon is visible only from southward between the bearings of 335° and 050° and can be seen for 4 miles. The daybeacon has a **radar reflector**.

Harbour in 10 feet (3 m), fine sand. The usual approach, from SE, passes to the north of two small islands and the adjoining rock patch in the entrance, then turns quickly to starboard around the island marked with the daybeacon. A **shoal rock** lies just off the point on the south side of the anchorage. Depths of 12 feet (3.7 m) are found in the approaches to this anchorage.

Charts 2308, 2309

Ganley Harbour, 0.5 mile west of Ganley Harbour, and 2 coves 1 and 1.5 miles farther west offer **anchorage** for small craft in 2 fathoms (3.7 m), sand, but are open to the SE. A **rock** submerged less than 6 feet (1.8 m) lies 0.3 mile SSE of the western cove.

Crane Island, 2.7 miles west of Ganley Harbour, is 40 feet (12 m) high with dry rocks at each end. Small craft can find anchorage, open to the east and SE, behind this island. The anchorage should be approached from SE. A rocky shoal submerged less than 6 feet (1.8 m) lies 0.2 mile WSW of Crane Island.

The Wheat Bin is a conspicuous light-coloured beach 5.5 miles WNW of Ganley Harbour.

The **Pukaskwa River**, 8 miles NW of Ganley Harbour, can be navigated by small craft as far as the falls 0.2 mile from its mouth, and offers **anchorage** in 3 fathoms (5.5 m). There is a gravel bar at the entrance that is shifted by yearly floods and by storms from the west. A depth of 6 feet (1.8 m) over the bar was reported in 1997.

Pukaskwa National Park extends from Pukaskwa River north to just south of Pic River. There are no marine facilities in the park. Mariners may anchor without charge in any of the harbours within the park boundaries; park fees must be paid to go ashore.

Davis Island, 100 feet (30 m) high, lies 1.3 miles NW of the Pukaskwa River mouth in the entrance to an unnamed bay. The bay was the site of a former logging depot known as **Pukaskwa Depot**.

Pointe La Canadienne $(48^{\circ}01'N, 85^{\circ}57'W)$ is bold and shows up well from a distance. **Rocks**, dry and awash, lie close to the west.

Richardson Harbour is sheltered by Richardson Island, 1.3 miles NNW of Pointe La Canadienne, and a group of islets NW of Richardson Island. The harbour offers **anchorage** for small craft with perfect protection in 3 fathoms (5.5 m), mud and sand. The water close off the NW and SE points of Richardson Island and the NW part of Pointe La Canadienne is deep. The anchorage can be entered from either end but the SE entrance is less difficult. **Bonamie Cove**, 0.7 mile SE of Richardson Harbour, offers poor shelter in west to NW winds.

Otter Head, 4 miles NW of Richardson Harbour, is 400 feet (122 m) high and is **conspicuous**. The NW tip of Otter Head has **shoal** water extending 0.3 mile NW; a **rock**, 2 feet (0.6 m) high, lies 0.4 mile west.

Otter Island $(48^{\circ}07'N, 86^{\circ}04'W)$ is 250 feet (76 m) high and wooded.

73 Otter Island light (1102) is at the NW corner of Otter Island.

A **shoal** spot with a depth of 7 feet (2.1 m) lies off the end of a string of dry **rocks** extending NW of the island. A **buoy** marks **shoal** water extending from the mainland east of Otter Island. A **shoal** with 19 feet (5.8 m) off the SE point of the island and the edge of a **shoal** extending from the mainland are both marked by **buoys**. An unmarked 4-fathom (7.3-m) **shoal** spot lies 0.1 mile east of the SE point of Otter Island.

A short string of islets 0.2 mile SW of Otter Island marks the NE edge of a triangular **shoal** that extends 0.3 mile to the SW. There is a deep channel between the islets and Otter Island.

76 **Old Daves Harbour**, between the north side of Otter Island and the small island to the north, offers good **anchorage** for small craft in 12 feet (3.7 m). The SE and preferred entrance is narrow and S-shaped. There are fishery **wharves** and a light-keeper's dwelling here. Depths in the entrance are reported to be9 feet (2.7 m), with depths of 6 to 9 feet (1.8 to 2.7 m) at the wharves.

77 **Anchorage** for larger vessels can be found 0.4 mile north of the SE point of Otter Island, with fair shelter, in 15 to 20 fathoms (27 to 37 m), sand. The usual

OTTER ISLAND (1998)



approach is from the north and favours Otter Island to avoid the **shoal** water extending from the mainland.

Otter Cove offers small craft anchorage with perfect shelter from all winds. The channel passes south of Wiedman's Island, narrowing to a width of 150 feet (46 m). Vessels with draughts of up to 24 feet (7.3 m) can find passage. The anchorage area, 0.2 mile SE of the island, has depths of 5 fathoms (9.1 m), sandy clay, shoaling rapidly at the SE end. A narrow channel with a reported depth of 9 feet (2.7 m) leads to the head of the cove. Anchorage may be found in 3 fathoms (5.5 m), mud. Many deadheads are reported in the narrow channel and in the east end of Otter Cove (1973).

Otter Cove can be entered by passing either north or south of Otter Island but the north route, having fewer hazards, is preferred. A mariner using the channel between Otter Island and Otter Head should favour the island to avoid the **shoal** water off Otter Head.

Otter Island to Peninsula Harbour

Chart 2308

80 **Cascade Falls** (48°08'N, 86°03'W), on the mainland NNE of Otter Island, are **conspicuous**.

Falls, offers **anchorage** for small craft in 6 feet(1.8 m), boulder and sand bottom, but is open to NW and has poor holding.

There is a small white slatwork pyramid **daymark**, elevation 41 feet (12 m), on the south point of the entrance. It is not visible from the south until the entrance opens.

83 **Swallow River**, 0.7 mile NNW of Triangle Harbour, has rapids at its mouth.

84 **Trapper Harbour**, a small bay 0.2 mile NNW of Swallow River, offers **anchorage** for small craft with good shelter in 6 to 10 feet (1.8 to 3 m), sand and clay. There is room for a vessel up to 35 feet (11 m) long to swing at a single anchor. A vessel up to 55 feet (17 m) can anchor with its stern secured to the shore. The entrance to the anchorage passes north of the island that shelters the harbour. There is a **shoal** lying to the NW of the island.

Many small bays lie between Swallow River and Simons Harbour, 6 miles to the NNW, but these do not offer shelter for anything but small boats. The land is high and the shore bold with only a few shoals. There is a 9-foot (2.7-m) **shoal** patch 0.4 mile off a bluff point 2.5 miles NNW of Swallow River. **Tip Top Mountain**, 5 miles east of Simons Harbour, is 1,520 feet (463 m) high.

Simons Harbour $(48^{\circ}16'N, 86^{\circ}08'W)$, 9 miles NNW of Otter Island, offers anchorage for small vessels, with fair shelter from most winds, in 15 fathoms (27.4 m), clay. Small craft can find anchorage with good shelter in the coves at the south end of the harbour.

The usual entrance is from SW, passing between the point which forms the west side of the harbour and the islands to the west. The channel is 900 feet (274 m) wide with depths of 15 fathoms (27.4 m).

A privately maintained white pyramid daymark with a red top, elevation 25 feet (7.6 m), is on the point described

A shoal spot submerged 3½ fathoms (6.4 m) lies 0.7 mile west of the daymark, and a patch of dry and submerged rocks lies 0.5 mile WNW of the daymark.

Stench Rock, covered less than 6 feet (1.8 m), 1 mile NW of Simons Harbour, is the outermost detached submerged rock between Simons Harbour and Oiseau Bay, 7 miles to the north. There is a deep channel between the shore and a mile-long string of dry and submerged rocks, 0.3 mile north of Stench Rock.

Chart 2304

Oiseau Bay, 8 miles NNW of Simons Harbour, is shallow with many rocks and reefs and offers shelter only for small craft.

The principal anchorages are in the north end of the bay, either behind the island just inside the NW entrance point in 5 fathoms (9.1 m), or behind the island 0.5 mile east of the same point in 2 fathoms (3.7 m), sand bottom. **Dampier Cove**, which lies behind the two islands in the SE corner of Oiseau Bay, is reported to offer **anchorage** with complete shelter but has only 6 feet (1.8 m) of water in the entrance. Excellent shelter is also reported in Nichols Cove, the north arm of the three-armed bay just south of Oiseau, Bay. The land behind Sewell Point, 2 miles NNW of Oiseau Bay, is high and thinly wooded.



Caution. — A magnetic anomaly has been 94 reported off Sewell Point.

Several anchorages are available to small craft east and north of Sewell Point. Cave Harbour, the bay 0.5 mile east of Sewell Point, is reported to offer excellent shelter but has less than 5 feet (1.5 m) of water. The bay 0.7 mile NNE of Sewell Point, known as Fish Harbour, is reported to offer anchorage in 2 fathoms (3.7 m), sand, and to have a fine sand beach, but it is open to the NW. Morrison **Harbour**, between the island 1.4 miles north of Sewell Point and the shore, offers good shelter in depths of up to 6 fathoms (11 m). The preferred approach to Morrison Harbour is from the south.

The shore from Morrison Harbour to Playter Harbour, 8 miles to the north, is fringed by scattered rocks close to the shore. **Playter Harbour**, 9 miles north of Sewell Point, is quite open to the west and offers only limited shelter for small craft. Shoal rocks extend from the south side of the harbour entrance but the north side is deep.

Pulpwood Harbour, the southern and smaller of the two narrow bays between Playter Harbour and Pic River, is reported to offer well-sheltered anchorage for small craft in 3 to 4 fathoms (5.5 to 7.3 m). There are dry rocks in the middle of the entrance channel. These should be left to port when entering.

A patch of dry and submerged rocks lies SE of the islet 0.9 mile west of the entrance to Pulpwood Harbour.

The entrance to **Mud Bay**, just north of Pulpwood Harbour, is reported to be obstructed by a **shoal**. The bay is suitable only for small boats.

There is a **conspicuous** sandy shore on the north side of the mouth of **Pic River**, 0.5 mile north of Mud Bay, on an otherwise dark-coloured coast.

The Pic River is very muddy. In a south wind, which frequently brings fog, it is reported that the lake waters are discoloured for many miles to the north of the mouth of Pic River but are clear to the south.

A narrow sand bar extends 0.3 mile offshore from the north side of the river mouth, then south over halfway across the river entrance.



Caution. — Old logging piles and cribs and deadheads in the river make navigation hazardous. The muddy water makes underwater dangers impossible to

see.

There is a considerable **current** in Pic River.

104

Highway 627 bridge crosses the Pic River 1 mile from the entrance. This highway leads to the main entrance of Puckaskwa National Park.



There is a small wharf on the south side of the river at the foot of the bridge.

Ojibways of the Pic River First Nation have a reserve on both sides of the river. There is a settlement with a convenience store and a restaurant on the north bank of the river.

Chart 2318

108 **Ogilvy Point** $(48^{\circ}37'N, 86^{\circ}21'W)$ is the most prominent point in this area. It is formed by several islands which taper off to the SW, ending at dry rocks. The rocks are on a shoal bank that extends 0.2 mile further SW.

Heron Bay, 2 miles NNE of Ogilvy Point, offers anchorage in 7 fathoms (12.8 m), sand, but with no shelter from westerly winds. Boulton Reef lies on the south side of the entrance to the bay. Randle Point is the NW entrance point of Heron Bay. C.P.R. Island lies close

PENINSULA HARBOUR (1998)



to shore in the SE corner of Heron Bay. **Keating Rock** is an isolated danger 0.2 mile WNW of C.P.R. Island.

There is a **wharf**, used by *Lafarge Canada Inc.* to import cement, on the north side of the harbour. The wharf is 322 feet (98 m) long and has a depth of 21 feet (6.4 m) alongside (1998). There are two groups of silos at the head of the jetty.

111 A private **lighted range**, in line bearing 058°, leads into Heron Bay clear of Keating Rock. The lights are operated on request for vessels using the wharf.

The settlement of **Heron Bay**, 1.3 miles east of the wharf, is on a railway line. There is a post office and a general store (1999).

Chart 2304

Approaches to Peninsula Harbour

- The usual route for approaching Peninsula Harbour begins at a point 5 miles west of Randle Point and leads from there to *Hawkins Island light*, 4 miles to the NNE.
- 114 **Craigs Pit**, a gravel pit 2 miles north of Randle Point, is **conspicuous** and can be seen for more than 25 miles. Four white storage tanks (*not shown on the chart*) 1.8 miles ESE of *Hawkins Island light* are prominent from the south.

Pic Island, 5 miles west of the approach course, is high and thickly wooded. It can be seen for a considerable distance, especially from the west. Hawkins Island is reported to be **radar conspicuous**.

116 Caution. — Magnetic anomalies have been experienced in the vicinity of Pic Island and near Peninsula Harbour.

117 **Uncle Bobs Bank**, with a least depth of 15 fathoms (27.4 m), lies 3 miles west of Craigs Pit. **Hale Rock**, 3 miles farther west, is 3 feet (0.9 m) high and small. **Fred Shoal**, submerged 9 fathoms (16.5 m), lies 1 mile SSE of Hale Rock.

118 There is a mast, elevation 27 feet (8.2 m) with a red and white diamond-shaped **daymark** and a **radar reflector**, on Hale Rock.

Chart 2306

The Peninsula (48°43'N, 86°24'W), rounded, symmetrical and densely wooded, is the SE entrance point of Peninsula Harbour. Ypres Point is the NW entrance point. Hawkins Island lies between the entrance points. The main entrance channel leads between Hawkins Island and The Peninsula. Senlis Shoal, with less than 6 feet (1.8, m), lies 0.1 mile east of Hawkins Island. The north entrance channel,

between Hawkins Island and Ypres Point, is obstructed by Manitoba Shoal, submerged less than 6 feet(1.8 m). Blondin Island and Skin Island are the principal islands inside the harbour. Meaux Shoal, least depth 7 feet (2.1 m), lies NW of Skin Island.



120 Hawkins Island light (1106) is at the south tip of the island.

Skin Island light (1107) is on the SW side of Skin 121 Island.

A conspicuous chimney, with red and white hori-122 zontal bands, stands near the paper mill buildings 0.15 mile south of the wharf.

The harbour is quite open to the SW, as Hawkins Island offers little shelter. The only anchorage with protection from all winds is in Jellicoe Cove in 7 fathoms (12.8 m), sand, with fair holding.

A **submerged water intake** in Jellicoe Cove is marked by privately maintained buoys.

125 There is a former booming area with several dol**phins** in the east end of Jellicoe Cove. The dolphins are now used to moor pleasure craft and small workboats.

The town of **Marathon** (population 5,500 in 1999) is named after the Marathon Paper Corporation of Wisconsin which established a pulpwood operation here in 1944. The mills were owned by Fort James Marathon Ltd.

The Fort James Marathon Ltd. wharf is 460 feet (140 m) long with a deck elevation of 7 feet (2.1 m). Depths range from 17 feet (5.1 m) to 24 feet (7.2 m) from the inner to the outer end, respectively (1998).

There are two privately maintained fixed red **lights** on the NE part of the Fort James Marathon Ltd. wharf. They are shown at an elevation of 19 feet (5.8 m) from masts 12 feet (3.7 m) high.

The town has banks, a post office, hotels, a hospital, and grocery and hardware stores. A marina is planned (1999).

130 There is railway freight service and an interprovincial bus service. The *Trans-Canada Highway* passes near by. A small private airport is nearby.

Port Munro, 2 miles NNE of Ypres Point, is well sheltered and free from shoals. Monmouth Island is on the west side of the entrance to Port Munro.

Caution. — The cove at the head of Port Munroe was formerly used to store log rafts. The cove north of 48°45'54"N is foul and dangerous to surface navigation.

Peninsula Harbour to Bottle Point

Chart 2304

A microwave tower 3 miles north of Monmouth 133 Island is 327 feet (100 m) high and has air obstruction **lights**.

Red Sucker Cove, 2 miles west of Monmouth Island, is deep and free from shoals but is quite open to the south.

Detention Island lies 4 miles west of Peninsula Harbour. A bank with dry **rocks** and a **rock** submerged less than 6 feet (1.8 m) extends 0.5 mile north of the island.

The inlet of **Port Coldwell** $(48^{\circ}45'N, 86^{\circ}32'W)$ lies 136 1 mile NNW of Detention Island. The preferred route passes close to the east entrance point of the inlet to avoid the dangers north of Detention Island.

137

Small craft can find **anchorage** in 3 fathoms (5.5 m), with good shelter and holding, near the head of the inlet.

138 There is a white daymark on the east entrance point of the inlet.

A partially exposed **wreck**, elevation 10 feet (3 m), 139 lies in the cove in the NW part of the inlet.

A gravel road leads from the NE corner of the cove up to the Trans-Canada Highway, at the abandoned community of **Coldwell**. There are no supplies or facilities nearby.

Premier Mountain (Mount Premier) has two microwave towers with air obstruction lights, 1 mile WNW and 2 miles north of the summit.

Thompson Channel passes between Pic Island, previously described, and the mainland. Foster Island and Sullivan Island lie in the NE part of the channel. Slyboots Rock, with unnamed shoals north and south; McKay Rocks, awash, east and SE of Sullivan Island; and Black Rock, 1 mile south of Foster Island, are **dangers** in the east end of Thompson Channel. Hale Rock and Fred Shoal, previously described, lie 2 and 3 miles SE of Sullivan Island.

McDonald Islands are NE of Pic Island. Guse Point, with deep water close to shore, and Moss Point flank the west entrance to Thompson Channel. Nicoll Shoal, submerged 2 fathoms (3.7 m), lies in the middle of the entrance. The usual route is between Nicoll Shoal and Guse Point.

 $\frac{}{\downarrow}$ tom.

Anchorage can be found in the bight east of Moss Point in 10 to 20 fathoms (18.3 to 37 m), mud bot-

The basin between the two parts of Allouez Island, 145 south of Pic Island, is reported to offer a pleasant and safe an**chorage** for small craft. Vessels can enter from the east but must pass south of a large partly dry rock which blocks two-thirds of the entrance.

Ashburton Bay is deep and quite open to the lake. It is surrounded by thickly wooded hills. McKellar Harbour $(48^{\circ}48'N, 86^{\circ}43'W)$ is in the northern part of the bay.

Lake Huron, St. Marys River, Lake Superior

Barclay Islands lie in the south approach to McKellar Harbour. Fitzsimmons Rocks, mostly surrounded by deep water, lie in the SW approach. A passage 0.1 mile wide separates the latter from shoal water extending from the mainland.

148 There is sheltered **anchorage** for small craft in McKellar Harbour, off the middle of the north side of the large island, in 4 fathoms (7.3 m), clay bottom. The harbour can be entered either side of the island. The preferred entrance is on the west side where the water is deep close to

the island. A **rock** islet, 4 feet (1.2 m) high, lies close north of the NW corner of the island.

149 An **overhead power cable** with a clearance of 110 feet (33.5 m) crosses the mouth of the cove in the NE part of McKellar Harbour.

Bottle Point, 6 miles WSW of McKellar Harbour, is a narrow neck of rock. Bottle Cove (L'anse à la Bouteille), on the west side of the point, is reported to offer poor shelter.

Lake Superior Nipigon Bay and Approaches

General


Chart 2300

- 1 This chapter covers the north end of Lake Superior, including Nipigon Bay, its outer approaches and the channels into the bay.
- The waters described in this chapter were surveyed by lead line between 1906 and 1916, except for the Nipigon River which was surveyed by modern methods in 1974.
- Depths and elevations quoted in this chapter refer to chart datum (see Sailing Directions booklet CEN 300 General Information, Great Lakes) and thus agree with charted values. Because Charts 2302, 2303, 2304 and 2305 are based on older water level datums, depths and elevations on these charts must be corrected to refer them to the presently adopted datum for Lake Superior. The required correction is noted on the chart. (More information on the older water level datums is given in Sailing Directions booklet CEN 300 General Information, Great Lakes.)
- 3.01 Real-time water level information for Lake Superior at Rossport is available from the *Canadian Hydrographic Service Automated Water Level Gauge*, telephone number 807-824-2250. (More information on water levels is given in Sailing Directions booklet CEN 300 General Information, Great Lakes.)
- 3.1 **Light buoy**. An *Ocean Data Acquisition System* (*ODAS*) meteorological light buoy, marked *45001*, is moored in mid-lake 48 miles SSW of Rossport.

Charts 2303, 2304

Slate Islands

Slate Islands (48°39′N, 87°01′W) lie in the east outer approach to Nipigon Bay. Jackfish Channel, 5 miles wide, separates the islands from the mainland shore. The east, west and south sides of Patterson Island are free of outlying dangers. Frank Rock, small and 4 feet (1.2 m) high; Dahl Shoal, submerged less than 6 feet (1.8 m); and a shoal patch with a least depth of 3 fathoms (5.5 m) lie off the north shore of Mortimer Island. Shoal water extends 0.3 mile north from the northernmost of the Leadman Islands.

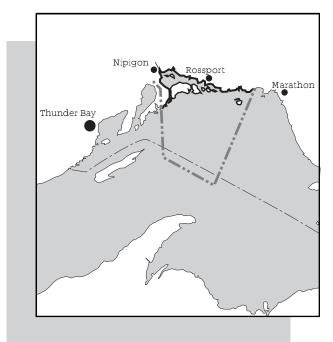

5 Slate Islands light (1111) is on a hill near the south point of Patterson Island. The keeper's dwelling is at the foot of the hill.

Island, McColl Island and Bowes Island, offers anchorage in deep water but holding is poor and deadheads are reported inshore. It is possible for small craft to moor to a cliff in the inner part of the harbour. The shallow water east of Bowes Island is reported to have adequate anchorage for small craft. Copper Harbour (Lambton Cove), on the south side of Mortimer Island, offers anchorage with good shelter in 14 fathoms (25.6 m) and it is possible to moor to a cliff.

- The preferred approach to the areas described above is from the west, because of the **shoals** south of **Dupuis Island**, east of Mortimer Island. **Kate Rock** is 0.2 mile north of Edmonds Island. A **log buoy** is moored 0.2 mile north of Kate Rock.
- 8 A daymark range on Bowes Island and two daymark ranges on the SE shore of Mortimer Island lead in from the SW, clear of Kate Rock, north of McColl Island and between McColl and Bowes Islands.
- 9 **Sunday Harbour** is on the south side of Patterson Island. The holding ground is poor and a heavy sea can build up in south and SW winds.
- A **submerged power cable** crosses Jackfish Channel, west from the south shore of Sunday Harbour and then NNW to the head of Terrace Bay.
- 11 A yellow *Ocean Data Acquisition System* meteorological **buoy** is moored 5.3 miles SSE of Patterson Island.

Bottle Point to Schreiber Point

Chart 2304

- 12 (Bottle Point and the coast to the east are described in Chapter 5.)
- The land is bold between **Bottle Point** (48°45′N, 86°52′W) and Jackfish Bay, 5 miles to the NW. **Steel Mountain**, 1 mile inland midway between these features, rises to a height of 760 feet (232 m).
- Lawson Island lies south of Santoy Bay 2 miles WNW of Bottle Point. Jack Rock, awash, lies close NE of Lawson Island. Haiste Rocks, submerged less than 6 feet (1.8 m), lie midway between the island and the shore. A sand cliff 0.5 mile west of Santoy settlement and a white shed 0.7 mile farther west are prominent (1974). Santoy Bay is open and offers little shelter.

Chart 2305

Jackfish Bay is a good harbour of refuge on the north side of Jackfish Channel. It is entered between **Cape Victoria**,

bold with deep water close to shore, and an unnamed point 2.6 miles to the east.**St. Patrick Island** (48°47′N, 86°59′W) is in the mouth of the bay, with **Teed Shoal** lying close SW. Dangers extend up to 0.2 mile off the island. A narrow channel of deep water east of the island is difficult to navigate.

16 Jackfish Bay light (1110) is on the SW part of St. Patrick Island.

- 17 **Little Nick Rock**, 0.4 mile off the north shore of the main bay, is 3 feet (0.9 m) high. A shallow bank extends 150 feet (46 m) to the south.
- The **ruins** of the abandoned settlement of *Jackfish* are on the east side of the bay. There were reported to be two cottages here in 1978. The wharves, shown in ruins, have been removed.
- Anchorage can be found in **Tunnel Bay**, the NE arm of Jackfish Bay, in 10 fathoms (18.3 m), mud. Holding is reported to be poor and precautions are necessary if strong winds are expected. **Moberly Bay** offers **anchorage** but the islets in its mouth give little protection.
- Overhead cables, with clearances of 97 feet (29.6, m) and 45 feet (13.7 m), cross Tunnel Bay near its head, and another, with a clearance of 60 feet (18.3 m), crosses the upper end of Moberly Bay.

Chart 2303

- The mainland shore from Jackfish Bay to Schreiber Point, 12 miles to the west, is broken by many small indentations and fronted by **shoal** water and dry **rocks** extending 0.1 to 0.3 mile offshore. **Victoria Bay** lies close west of Cape Victoria.
- Almos Shoal, with a least depth of 2 fathoms (3.7 m), is the outermost danger between Cape Victoria and **Terrace**Bay, 5 miles to the west. There is a prominent grey building near the shore 1 mile west of Almos Shoal.
- 23 Terrace Bay light (1111.1) is on a small island at the entrance of **Aguasabon River**, 2.2 miles west of Almos Shoal.
- 24 There is a small boat channel into Aguasabon River marked by the light mentioned above and by **daybeacons**. There are floating small-craft **wharves** and a concrete **launching ramp** inside the river at the NE corner of the sand spit, near the shoreline. Entry into the river requires local knowledge.
- 25 **Chase Rock**, well above water, and **Keith Rocks**, submerged less than 6 feet (1.8 m), lie off the east and west entrance points to Terrace Bay.
- A **conspicuous water tank** and a large power-house are at the head of Terrace Bay. A **submerged power cable** crosses from the head of the bay in a SE direction to a position on the south coast of Patterson Island.

- Anchorage is possible for small craft, in calm winds, behind the islets in the NE part of the bay. Terrace Bay is quite open to the south.
- The settlement of **Terrace Bay** (population 2,200 in 1999) is 2 miles east of the head of the bay. Terrace Bay has a bank, a hospital, medical and dental offices and a shopping centre (1999).
- There is a *Kimberly Clark of Canada* pulp and paper mill at Terrace Bay. There are chimneys, prominent buildings and a red and white **tower** with air obstruction **lights** at the mill.
- 30 **Les Petits Ecrits** (48°45′N, 87°13′W), five small islands close offshore 2 miles west of Terrace Bay, are separated from the shore by a narrow channel of deep water. **Anchorage** for small craft can be found behind the islands, but this location is unsafe in strong winds.
- Worthington Bay lies 1 mile west of Les Petits Ecrits.
- 32 **Schreiber Point** (48°46′N, 87°18′W), on the east side of the entrance to Schreiber Channel, is the most prominent feature in this locality. The point is rugged and backed by the high land of **Mount Gwynne**.

Approaches to Nipigon Bay

Charts 2303, 2312

- Nipigon Bay is the northernmost part of Lake Superior. The bay lies between Schreiber Point and Agate Point, 38 miles to the WSW, and is separated from the lake by a string of large islands. The north and east sides of the bay are backed by high, thickly wooded hills. The west side is mostly flat and swampy.
- Schreiber, Wilson and Simpson Channels and the Moffat and Nipigon Straits, named from east to west, lead into the bay. Simpson Channel, wide and free from shoals, is the best and safest for newcomers. There is a light and a prominent point at its south entrance. Nipigon Strait is the shortest route for vessels approaching from the west but it is very narrow at Fluor Island and local knowledge is advised. The other three passages are suitable only for small vessels.
- 35 **Caution.**—There is a local **magnetic anomaly** of 1° to 7° in the area between Wilson and Fluor Islands. Mariners using magnetic compasses should exercise particular caution at night or in reduced visibility.

Chart 2303

Copper Island $(48^{\circ}46'N, 87^{\circ}23'W)$, the easternmost of the string of islands across the mouth of Nipigon Bay, has three distinct high points. The summit is near the middle of the

island. A reddish-white cliff on the NE side of Copper Island north of the summit is **conspicuous** from 7 miles offshore.

Wilson Island lies 0.2 mile west of Copper Island. The water between Copper and Wilson Islands is not navigable.

38 **Barr Island** lies close SE of Wilson Island. **Barr Island Harbour**, on the north side of Barr Island, offers **anchorage** with good shelter. A **wharf** on Wilson Island is reported suitable for shallow-draught boats under 30 feet (9.1 m) in length.

39 **Small Lake Harbour**, on the south shore of Wilson Island, is open to the south.

Chart 2312

- Wilson Island Harbour, at the SW corner of Wilson Island, offers **anchorage** with good shelter in 4 fathoms (7.3, m). The usual entrance to the harbour favours the deep water on the south side to avoid the **shoal** water and dry **rocks** on the north.
- Cobinosh Island (48°45′N, 87°29′W) lies 0.3 mile south of Wilson Island on the east side of the south entrance to Wilson Channel.
- Wilson Channel, leading between Wilson Island and the islands to the west, is seldom used except by small craft bound for Rossport. The channel is unmarked and is reduced in width to 0.2 mile at its north end by **Tracy Shoal**. This **boulder** shoal has a depth of 16 feet (4.9 m) and has deep water on its NW side.
- 43 **Caution**. Although a route with a least depth of 6 fathoms (11 m) can be followed through Wilson Channel in good visibility, the channel is hazardous at night or in reduced visibility for craft with draughts more than 14 feet (4.3 m).
- 44 **Vein Island** lies 0.7 mile west of Wilson Island.
- 45 **Battle Island** (48°45′N, 87°33′W) lies 1.4 miles SW of Wilson Island.
- 46 Battle Island light (1117) is near the SW end of the island.
- 47 **Simpson Island** is a large island 1.5 miles west of Vein and Battle Islands.
- 48 **Morn Point**, the SE tip of Simpson Island, is quite bare. The high land near the middle of the point is prominent. The water is deep close to shore.
- 49 (Simpson Channel, leading between Vein Island and Simpson Island, is described later in this chapter.)
- Dunmore Island (48°45′N, 87°43′W) is close SW of Simpson Island in the SE approach to Moffat Strait. There is a small **rock**, 5 feet (1.5 m) high, with deep water on its south side, close off the SE point of the island. **Mooley Island** (*not named on the chart*) is 0.2 mile NE of Dunmore Island in the mouth of **Woodbine Harbour**.

BATTLE ISLAND (1998)



- Small craft can find **anchorage** in Woodbine Harbour, with perfect shelter but limited in area, in 5 fathoms (9.1 m), mud. The usual route into the harbour leads close to the east shore to avoid the **shoal** spit projecting from Mooley Island. There is an 8-foot (2.4-m) **shoal** spot off **Grebe Point**.
- 52 **Grotto Point**, the SE entrance point to Moffat Strait, is rocky and comparatively low. **Shoals** and an islet lie west and NW of the point. **Quigley Island** lies 0.2 mile to the north.
- 53 **St. Ignace Island**, 13 miles wide, close west of Simpson Island, is the largest island in the approach to Nipigon Bay.
- McNab Peninsula (48°44′N, 87°49′W) is the SE point of St. Ignace Island. **Bullers (Giraoud) Island** lies close ESE of McNab Peninsula.
- Bignell Point, 1 mile NE of Bullers Island, has shoals extending SE and east for 0.4 mile. St. Joe Islands and several **rocks** lie on this shoal. **Fisher Rock**, the easternmost, is only 2 feet (0.6 m) high but can usually be seen.
- The east side of Bead Island in line with the east side of St. Ignace Island, bearing 023°, lead 0.3 mile east of the dangers off Bignell Point.

- Moffat Strait lies between Simpson Island and St. Ignace Island. The south part of the strait is wide, deep, free of outlying shoals and can be entered safely in bad weather. The channel through Moffat Strait is not buoyed. There is a **shoal** bank in the north part of the strait. Vessels with draughts up to 14 feet (4.3 m) may find passage but local knowledge is required.
- Bead Island, on the west side of the entrance to Moffat Strait, is the east side of the entrance to St. Ignace Harbour. The north end is separated from St. Ignace Island by Bead Island Channel. The channel is obstructed by a rock submerged 1 foot (0.3 m) and is suitable only for small craft. The ruins of a wharf are on the north side of the channel.
- Leon Island and Cebina Island lie in the shallow part of the strait 3 miles NNE of Bead Island. **Finch Head** is on the west side of the northern entrance to Moffat Strait.
- Anchorage can be found at the head of St. Ignace Harbour in 4½ fathoms (8.2 m), sand, but the harbour is open to the SE. Anchorage with perfect shelter can be found in the north part of Moffat Strait. Good anchorage can be found NE of Quigley Island and also in Wickham Bay, SW of an islet 5 feet (1.5 m) high, in 10 fathoms (18.3 m),

mud. Wharves 0.5 mile SSE of the islet are in **ruins**. The **cribs** of these wharves are submerged 3 feet (0.9 m).

South Sides of St. Ignace and Fluor Islands

- The south side of St. Ignace Island, from McNab Peninsula to Newash Point 8 miles to the WSW, is bordered by a large wide-open bay with many islands and shoals.
- 62 **Caution.**—There are three isolated dangers in the approaches to the bay. **Thorne Shoal**, submerged 3 feet (0.9 m), is 1 mile WSW of McNab Peninsula. **Reid Island** lies 0.6 mile farther west. **Whelan Shoal**, with a least depth of 11 feet (3.4 m) and deep water all around, lies 2 miles west of Reid Island.
- Small boats can use **McNab Harbour**, on the west side of McNab Peninsula, but it is quite open to the south.
- Armour Island (48°45′N, 87°52′W), Burnet Island and Hope Island lie in the approaches to Armour Harbour. The harbour is surrounded by hills. Anchorage can be found in 5 fathoms (9.1 m), mud, with protection from all winds. Vessels with draughts up to 20 feet (6.1 m) can navigate the narrow passage east of Armour Island and there is a deep channel between Armour and Burnet Islands. The preferred entrance to the harbour leads between Fraser Point and Hope Island. There are submerged rocks SE of Fraser Point and NW of Hope Island.
- Nest Island lies 1 mile SW of Fraser Point. Rocks and shoal water extend SSE from Nest Island. An islet lies 0.2 mile to the NW.
- 66 **Duncan Cove**, 1.5 miles WNW of Nest Island, between **Pope Point** and **Dupuis Point** (*not named on the chart*), is open and fringed by **shoal** water.
- Bowman Island, Owl Island and Paradise Island are almost surrounded by extensive shoal areas. The narrow passage between Bowman and St. Ignace Islands has depths of 18 feet (5.5 m) but there is a sharp bend and the passage is suitable only for small craft. A small wharf is at the SE end of Bowman Island.
- Newash Point (48°41'N, 88°01'W) is the most southerly part of St. Ignace Island. Dry rocks and shoal water extend 0.6 mile to the SE and east. The passage between Newash Point and Agate Island has many submerged rocks and shoals. A detached rock, awash, lies 0.3 mile north of the NW point of Agate Island.
- Agate Island and **Raven Island**, 1.2 miles to the NE, are separated from **Talbot Island**, **Angelica Island**, **Longcroft Island** and **Josephine Shoal** by a deep narrow passage.
- Anchorage with perfect shelter can be found between Owl Island and the rock awash north of Agate Island in 8 fathoms (14.6 m), mud. Vessels can enter the anchorage between Angelica and Longcroft Islands. There is a 14-foot (4.3-m) shoal spot in the middle of the gap, with a

- deep passage between this shoal and Angelica Island. Agate Island has **shoals** and shallow water to the east, up to 0.2 mile off. The anchorage can also be entered north of Talbot Island. **Shoal** water extends 0.4 mile south from Owl Island.
- Anchorage with good shelter can be found between Bowman and Owl Islands. Small craft can find best protection in the west end of the passage between Bowman and Paradise Islands. The passage is entered from north of Owl Island.
- Blind Channel, least depth 2 feet (0.6 m), between St. Ignace and Fluor Islands, is not navigable. **Mystery Island** (48°40′N, 88°01′W) and **Birch Island** lie in the mouth of Blind Channel.
- Fluor Island has several islands off its SE shore, including Tisdall Island, Irvine Island and Willard Island. This group is separated from a string of islands and rocks which includes Puff Island, Tremblay Island, Provost Island and Cedar Island by a deep channel. Rocks and shoal water fill the area between Puff and Tremblay Islands, and shoal water extends 0.2 mile SW of Provost Island.
- Provost Island is the southwesternmost of the five **Bill and Jim Islands**. Local knowledge is required to transit the channel between this group and Tremblay Island.
- 75 **Caution. Schank Rock**, 0.3 mile SW of Willard Island, has a least depth of 2 feet (0.6 m). This rock is dark in colour and cannot be seen. There is a small **rock**, 2 feet (0.6 m) high, lying 0.1 mile to the north which can sometimes help locate Schank Rock. **Dacres Rock**, 2 feet (0.6 m) high, is joined by **shoal** water to **Starke Point**.
- Anchorage in 12 fathoms (21.9 m), mud, can be found behind Puff Island but it is exposed to the south.

Channels to Nipigon Bay

Charts 2303, 2312

Schreiber Channel to Rossport

- 77 **Schreiber Channel** (48°46'N, 87°20'W) is the shortest route from the east for small vessels bound for Rossport or Nipigon Bay. It has few aids to navigation and should not be used at night or in reduced visibility. Simpson Channel is more suitable at such times.
- Schreiber Channel is bordered to the north by the mainland and to the south by Copper Island and Wilson Island. The west end of the channel is divided into narrow passages by a group of smaller islands, including Channel Island, Healey Island and Quarry Island.
- 79 The southernmost route through Schreiber Channel to Rossport leads through Steamboat Channel between Wilson and Channel Islands. An alternative route leads through the passage between Channel and Healey

Lake Huron, St. Marys River, Lake Superior

Islands, then around the south and west sides of Quarry Island. A small-craft route leads through the passage between Healey and Quarry Islands, then NW between Nicol Island and Whiskey Island.

Chart 2303

- Schreiber Beach (48°48'N, 87°18'W) lies 1.5 miles NNE of Schreiber Point at the head of Collingwood Bay. The settlement of Schreiber (population 1,700 in 1999) lies 1 mile to the NE. Schreiber is on the railway and *Trans-Canada Highway* and has a post office, a bank, a doctor and shopping facilities.
- A microwave **tower** with air obstruction **lights** is close NE of Schreiber. **Winston Point** is 4 miles WNW of Schreiber Beach. A second microwave **tower** is 1.7 miles ENE of this point. There is a **conspicuous** sand cliff 1 mile north of Winston Point.
- 82 Collingwood Bay is deep and open to the south; there is no good anchorage here. **Anchorage** is possible in good weather at the head of the bay, 0.2 mile offshore in 15 fathoms (27.4 m).
- The two **Cat Islands** lie 1 mile WNW of Winston Point. The larger island has an elevation, to the treetops, of 117 feet (36 m). A small dry **rock** lies 0.2 mile ESE, and a **shoal** spit with a least depth of 16 feet (4.9 m) extends 0.5 mile SE of the islands.
- 84 **Bread Rock**, submerged 5 feet (1.5 m), is in the mouth of Schreiber Channel 1.7 miles SSW of Schreiber Point. The rock is very small and surrounded by deep water except to the east, where 19 feet (5.8 m) is found 0.2 mile off. Bread Rock is marked by a **buoy**.
- McGarvey Shoal, consisting of large boulders submerged 4 feet (1.2 m), lies 0.4 mile off the north shore of Copper Island. It is the only obstruction in the approach to Steamboat Channel and is marked by a **buoy**.
- Wilson and Copper Islands in 12 to 15 fathoms (21.9 to 27.4 m), mud.
- 87 **Steamboat Channel** (48°48′N, 87°29′W) leads between **Wilson Island** and **Channel Island**. A mid-channel course has minimum depths of 6 fathoms (11 m). However, the channel is not buoyed and there is **shoal** water on both sides.
- Steamboat (Confiance) Island, in the middle of the east entrance to Steamboat Channel, is small with deep water all around and 40 feet (12 m) high to the treetops (1974). **Kingcome Island** is just separated from Channel Island.
- The north side of Wilson Island in line with the north side of Steamboat Island, bearing 281°, and the SW point of Channel Island in line with the south side of Steamboat Island, bearing 285°, clear McGarvey Shoal.

Chart 2312

90 **Little Lake Harbour** (48°48′N, 87°30′W), 0.7 mile east of **Daylight Point** (not named on the chart), near the NW point of Wilson Island, offers **anchorage** with complete protection. The entrance passage is 75 feet (23 m) wide with a least depth of 3 feet (0.9 m). It is reported that a channel 25 feet (7.6 m) wide with depths of 8 feet (2.4 m) can be found close to the west entrance point.

Quarry Island lies NW of Channel Island. The west side of Quarry Island is a **conspicuous** cliff over 200 feet (61,m) high, with deep water close to the base. **Whiskey Island**, close north, has a **rocky** flat extending north to **Blanket Island** (not named on the chart), which is a small wooded island with deep water on the north side. The passage between Quarry Island and Whiskey Island is mostly **foul** with shoal water and several unnamed islands extending 0.15 mile westward.

92 The main route to Rossport leads from the west end of Steamboat Channel along the west sides of Quarry Island and Whiskey Island. The entrance channel to Rossport Harbour passes close north of Blanket Island. The channel is 150, feet (46 m) wide and has a depth of 5 fathoms (9.1 m).

93 *Rossport Point light (1114)* is on **Rossport Point** (48°50′N, 87°33′W).

94 Rossport Harbour Entrance light (1113) is on the NW end of Whiskey Island.

Rossport light (1112) is on the Public wharf.

Routes north of Channel Island

- The passage that leads between **Channel Island**, on the south side, and Healey and Quarry Islands on the north side is an alternative to Steamboat Channel. This passage has a minimum width of 0.1 mile between the 10-fathom (18.3-m) lines. **Shoal** water and **Spider Reef**, a small rock 2 feet (0.6 m) high marked by a **buoy**, lie north of Channel Island. **Rocks** extend south from **Healey Island** and **shoal** water extends south from Quarry Island.
- There is a small-craft passage to Rossport, least depth 21 feet (6.4 m), between Healey and Quarry Islands. The route continues through the passage between Whiskey Island and **Nicol Island**, to the NE, avoiding **shoal** water off the south side of Nicol Island. An old **marine railway**, submerged 4 feet (1.2 m), extends 40 feet (12 m) from the SW point of Nicol Island.
- Nicol Island is joined to the mainland by a **causeway**, with **submerged cables** to the west and a **water intake** to the east of this structure.
- Boone Island lies north of the west end of Healey Island. A shoal spit extends from the north shore of Healey Island. An unmarked winding channel with a depth of 21 feet (6.4 m) lies between these islands.

ROSSPORT (1998)



Rossport Harbour is an excellent well-sheltered harbour for small craft and small vessels. There is a Harbour Manager. The facilities are managed by *Halcyon Haven*.

101 A **submerged power cable** crosses from Rossport Harbour in a SSW direction to Battle Island.

The **anchorage** area is limited but offers perfect shelter in depths of 6 to 15 fathoms (11 to 27.4 m), mud.

The Public **wharf** at Rossport extends 65 feet (20 m) south from the shore to an L-end 107 feet (33 m) long. In 1999, depths along the south face were 13 to 16, feet (4 to 4.9 m), the north face 10 to 14 feet (3 to 4.3 m), the east face 6 to 13 feet (1.8 to 4 m), and at the outer end of the west face 10 feet (3 m). A **rock** submerged less than 6 feet (1.8 m) lies 300 feet (91 m) east of the outer end of the wharf.

The **piles** of an old fishing wharf and several submerged **cribs** and **piles** are in the western part of the harbour. Two exposed **cribs** are NW of the Public wharf.

The hamlet of **Rossport** (population 130 in 1999) has restaurants and a hotel. The *Trans-Canada Highway* passes near by. The nearest bank, doctor, and scheduled rail and bus facilities are in Schreiber. Some supplies are available from *Halcyon Haven*, a restaurant near the wharf.

Powder Islands, consisting of Anguros Island and West Anguros Island, lie 2 miles NW of Rossport Point in

the entrance to **Pays Plat Bay**. A **shoal bank** lines the head of the bay.

Islands in 7 fathoms (12.8 m), clay. Small craft can find well-protected **anchorage** between Anguros and West Anguros Islands in 15 feet (4.6 m).

Pays Plat is a village on the banks of the **Pays Plat River** on the north side of the bay. This is part of *Pays Plat First Nation Reservation 51. Cavers Cove Resort* owns a small private **wharf** in the NW part of the bay. The **ruins** of a provincial seaplane wharf are on the west side of the bay.

Simpson Channel

Simpson Channel (48°45'N, 87°35'W), leading between Simpson Island and Vein Island, is free of dangers and the entrance is marked by *Battle Island light*. This is the safest channel into Nipigon Bay.

Morn Harbour, west of Morn Point and protected by **Raymond Island**, is limited in area but offers **anchorage**, with perfect shelter from all winds, in 3 to 5 fathoms (5.5 to 9.1 m), mud. It is entered east of Raymond Island.

Beetle Point is on the south shore of Simpson Island, 2 miles west of Morn Point. Grebe Point is 2 miles further west. An 8-foot (2.4-m) shoal spot is found 0.1 mile off Grebe Point. Two shoals with least depths of 10 and 28 feet (3 and

8.5 m) lie south of **McKay Cove**, close west of Beetle Point. **Legault's Rock** (**Legault Island**) is 0.6 mile east of Beetle Point.

- There are two islets in the entrance to a shallow bay on the north side of Battle Island (*described earlier*). A passage between the islets has a depth of 12 feet (3.7 m).
- 113 **Caution**. An isolated **shoal** spot lies 0.2 mile NNW of *Battle Island light*. Two points on the north side of Battle Island in line bearing 100° clear this danger to the north; two points on the west side of Vein Island in line bearing 325° clear it to the west.
- Vein Island, offers **anchorage** with perfect shelter and good holding in 6 to 20 fathoms (11 to 37 m). Small craft can find **anchorage** in shallower water between **Harry Island** and **Minnie Island** and in the bay NNW of Harry Island.
- The west entrance to Chummy's Harbour is preferred. There are two small islands (not named on the chart) between Vein Island and Harry Island, with a least depth of 4 fathoms (7.3 m) in between. The southern of these islands is **Chummy's Island**, the other **Larson Island**. The entrance follows a mid-channel route between Harry Island and the SW point of Vein Island on a course of 080°, then passes midway between the two small islands until the harbour opens up. The south entrance to Chummy's Harbour, between Harry and Minnie Islands, is almost blocked by an islet. A **shoal** submerged less than 6 feet (1.8 m) lies 0.1 mile to the SW. The east entrance to Chummy's Harbour is a very narrow channel with depths of 12 feet (3.7 m).
- The east side of Simpson Channel north of Vein Island is bordered by two shoals: **Rolette Shoal**, formed of **boulders**, has a least depth of 3 feet (0.9 m) and is surrounded by deeper water; **Powder Shoal (Barwis Rock)**, awash, is small and detached.
- 117 Powder Shoal is marked by a **buoy**.
- 118 Battle Island light, in sight west of Vein Island, leads west of Rolette Shoal.
- There is a port hand **daybeacon** on the NE part of Simpson Island.
- 120 **Crow Point**, on the mainland, is the NE entrance point of Simpson Channel. It has a **conspicuous** gravel cliff on its south side and rocky hills to the north.

Nipigon Bay

Crow Point to Vert Island

Oldman Shoal $(48^{\circ}53'N, 87^{\circ}41'W)$, in the west part of Cavers Bay, is the only outlying danger between Crow Point and Nuttal Point. A water tower on the shore of Gravel Bay is visible from the south over an arc of 15° .

- The mouth of **Dead River**, on the west side of **Gravel Point**, is completely blocked by a **sand bar**. **Gravel River**, 1 mile to the NNE, is not navigable because of weeds.
- The outermost dangers between Nuttal and MacInnes Points are **Druid Rock**, 12 feet (3.7 m) high, and **Lakeside Shoal**, awash. These dangers lie off **Grant Point**, at the west entrance to **Mountain Bay**.
- Î.
- Anchorage can be found in the east part of Mountain Bay in 6 fathoms (11 m), clay.
- MacInnes Point $(48^{\circ}56'N, 87^{\circ}56'W)$ is backed by a steep bluff. The point has **shoal** water extending 1 mile to the SE, marked at its south edge by a **buoy**.
- There is a starboard hand **daybeacon** on MacInnes Point.
- The south shore of Nipigon Bay is free of off-lying dangers from NE of Simpson Island for 9 miles west to Burnt Point on St. Ignace Island. A quarry 1.6 miles west of the port hand daybeacon on the NE part of Simpson Island is prominent. **Burnt Point** is low but the land directly behind it rises to a considerable height, with cliffs showing to east and west. **Cape Nano**, 2 miles west of Burnt Point, is very abrupt, rising almost vertically to 340 feet (104 m) above the water.
- Three detached **shoal** spots lie midway between Burnt Point and Cape Nano. The first, with a least depth of 9 feet (2.7 m), is 0.3 mile offshore. The others, with 21 and 17 feet (6.4 and 5.2 m) over them, lie 0.4 and 1.2 miles NNE of the first shoal.
- 129 **Vert Island**, 2.5 miles NNW of Cape Nano, has a bold point 555 feet (169 m) high on the NE coast and a rocky cliff 495 feet (151 m) high near the west point. An abandoned quarry and wharf **ruins** are near the cliff.

Vert Island to Nipigon River

- Brûlé Shoal (48°53′N, 87°59′W), with a depth of 3 feet (0.9 m), lies 1.3 miles east of **MacKinnon Point**, the SE end of Vert Island.
- Vert Island and the islands to the west lie on a shallow bank which extends southward to St. Ignace Island. The bank has depths of 14 feet (4.3 m). Two unmarked dangers lie on the bank, SSE of **Outan Island**. **Piledriver Shoal**, awash, lies 0.5 mile SSE of the island; a **rock** with a depth of 4 feet (1.2 m) lies 1.2 miles farther SSE.
- The entrance channel to **Kama Bay**, 2 miles north of Vert Island, is restricted by **shoal** water and **rocks** extending from **Kama Point** and **Cooper Point**. A gravel pit 1.8 miles ESE of Kama Point is **conspicuous**, especially in the afternoon sun.
- Anchorage with perfect shelter can be found in the SE part of Kama Bay in 7 fathoms (12.8 m), clay.
- Cooper Point. A shallow bank extends up to 1.6 miles offshore

RED ROCK (1998)



from Cooper Point SW to **Hughes Point** and west to the Nipigon River.

135 **Crichton Island** (48°57′N, 88°06′W), 1 mile NW of Vert Island, has **shoal** water extending to the south and SW.

136 Crichton Island light (1120) is on the SE tip of Crichton Island.

Holden Shoal, submerged 5 feet (1.5 m), lies 1.5 miles WSW of Crichton Island. The south side of the shoal area 0.4 mile SE of Holden Shoal is marked by a buoy. La Grange Island, on the south side of the channel, rises gradually from the south to a high cliff on its NW point.

138 **Clay Shoal**, submerged 17 feet (5.2 m), lies on the south side of the channel 0.8 mile west of La Grange Island and is marked by a **buoy**. The edge of **shoal** water south of Hughes Point is also marked by a **buoy**.

139 **Jossie Island** and **Beckie Island** are two islets off Hughes Point.

140 **Five Mile Point**, on the west shore of Nipigon Bay 2.5 miles west of La Grange Island, is backed by rocky hills. These rise abruptly to 565 feet (172 m) close to the west, and to 855 feet (261 m)1 mile to the WNW.

Anchorage can be found between La Grange Island and Vert Island in 5 fathoms (9.1 m), clay. The anchorage is east of the south edge of La Grange Island, with

Crichton Island light in line with the west edge of Vert Island. The anchorage is quite open to the south.

142 **Anchorage** with good holding can be found midway between Five Mile Point and Clay Shoal in 11 fathoms (20.1 m), clay.

The community of **Red Rock** (population 2,000 in 1999), 1.2 miles NW of Five Mile Point, is the site of a *Domtar* newsprint and linerboard plant with a **conspicuous** water tank and oil tank.

Red Rock has a bank, a doctor, a grocery store, a liquor store and a convenience store (1999). The *Trans-Canada Highway* is 8 km to the west. There is an interprovincial bus service at the highway and a railway freight service.

Up until 1988 *Domtar* used a wharf near the NE end of the plant grounds for shipping and receiving; the wharf has since been dismantled. A causeway (48°56′29″N, 88°14′43″W), that connected the former wharf to the shoreline, remains.

146 **Caution.**—There is evidence of **underwater piles**, remnants from the wharf, in the area SE of the causeway. Mariners should keep 0.1 mile offshore near the *Domtar* plant.

A submerged water intake extends from shore close west of the causeway. A submerged crib, with a depth of 34 feet (10.4 m), is 0.2 mile NE at the end of the intake.

Two **breakwaters** enclose a rectangular basin. The entrance, at the NW corner, is marked by privately maintained **lights**. There are no repair facilities here.

148.1 **North Trout Creek** enters Nipigon Bay 0.1 mile west of the marina. A **potable water intake** extends 0.4 mile NNE from the north entrance to the creek.

149 **Nipigon River** has a deep channel leading from its mouth to a position 1 mile above **Cook Point** (48°58′N, 88°15′W) where good **anchorage** can be found in 10 fathoms (18.3 m), clay. The edge of **shoal** water extending from Cook Point is marked by a **buoy**.

The channel is narrow above the anchorage and **obstructed** by the remnants of log booms. There are depths of 6 feet (1.8 m) as far as the Public wharf but local knowledge is required. Privately maintained **buoys** mark the best channel.

An **overhead power cable** with a mid-point clearance of 76 feet (23.2 m) crosses the river 1 mile below the Public wharf. The channel is near the eastern bank of the river. It is reported that 350 feet(107 m) off the eastern shore the

152 There is a strong **current** in the river. In strong southerly winds the current causes rips in the area NE of **Stillwater Bay**.

overhead clearance is 102 feet (31 m).

153 The Public **wharf** at Nipigon has an elevation of 3 feet (0.9 m) and is 334 feet (102 m) long. In 1999, there were depths of 8 to 12 feet (2.4 to 3.7 m) along the outer face. There are several floating finger **wharves**, three launching **ramps** and a small **marine railway** (1999). There is little current at the wharf. The wharf area is separated from the main river by a long **breakwater**.

The community of **Nipigon** (population 2,315 in 1988) has churches, a bank, post office, hospital, doctors, dentist, supermarkets and good shopping facilities, motels, hotels, liquor and beer stores, licensed restaurants, laundromat, golf and tennis. The *Trans-Canada Highway* passes through Nipigon and there is an interprovincial bus service.

Public wharf. There is a mechanical and hull repair business nearby, with a small marine railway.

Nipigon Strait to Nipigon River

Nipigon Strait $(48^{\circ}45'N, 88^{\circ}05'W)$ is the shortest route between Thunder Bay and Red Rock. The strait is very narrow west of Fluor Island; local knowledge is required.

Lamb Island (48°36′N, 88°09′W) lies in the south entrance to Nipigon Strait.

1

158 Lamb Island light (1126) is in the centre of Lamb Island.

Sovereign Rock, submerged 13 feet (4 m), is the outermost of the **shoal** rocks extending SW from Lamb Island.

The usual entrance to Nipigon Strait is east of Lamb Island. The passage west of Lamb Island is **obstructed** by a group of **shoals** which includes **Newcombe Rock**, least depth 1 foot (0.3 m), and by **shoals** SE and east of **Spar Island**. The NE point of Spar Island is a cliff with deep water close to shore. The small-craft passage between Spar Island and the mainland is narrow and shallow with a sharp bend.

Fluor Island forms the east side of the southern part of Nipigon Strait. Rocky cliffs, with deep water beneath in places, line the SW side of the island. Dacres Rock and Cedar Island lie SSE of Starke Point, the south point of Fluor Island. Depths of 26 and 30 feet (7.9 and 9.1 m) are found in mid-channel SW of Cedar Island and Starke Point, respectively.

Moss Island, on the west side of the strait, is separated from the mainland by a narrow channel made hazardous by several dry and submerged **rocks**. This channel has a depth of 6 feet (1.8 m).

Nipigon Strait is reduced in width to 0.1 mile abreast of the bay between the north and south parts of Fluor Island by **rocks**, islets and **shoal** water. Named features are **Ford Island** and **McGhie Rock**. **Sarrat Island** (unnamed on the chart) is a small islet 6 feet (1.8 m) high lying 0.9 mile NE of the north end of Moss Island. This islet, one of a group of islets and submerged **rocks** lying SW of the narrow part of the channel, makes a good approach mark.

164 Nipigon Strait range lights (1124, 1125) are on the mainland west of **Beeton Point**, the north point of Fluor Island. The lights in line lead through the narrow section of the channel. The lights and **daymarks** are reported to be easy to identify.

The section of the strait described above is marked by **buoys**.

Stowe Point, 0.7 mile east of Beeton Point, marks the east side of the north end of **Blind Channel**. The channel is not navigable.

The strait, bounded to the east by **St. Ignace Island**, widens and is clear of mid-channel dangers above Fluor Island. There are **obstructions** up to 0.3 mile from shore on the east side within 3 miles of Beeton Point. The **ruins** of a wharf are on the east side of the strait 4.6 miles north of Beeton Point.

Anchorage, but with poor shelter, can be found south of Sarrat Island in 10 fathoms (18.3 m), mud. Anchorage with better shelter is available 0.6 mile NE of Beeton Point, with Blind Channel just closed, in 7 fathoms (12.8 m), mud. Small craft can find very snug anchorage

inside the north end of Moss Island, and less-sheltered anchorage SW of Moss Island in Moss Harbour.

Pointe à la Gourganne (48°48′N, 88°07′W), on the west side of the head of Nipigon Strait, is bold and the bottom drops away quickly on its NE side. The land behind rises to nearly 400 feet (122 m).

170 **Caribou Point** is on the NW side of St. Ignace Island.
171 The channel to Red Rock from the head of Nipigon
Strait passes south of **Frog Island** and then between **Burnt Island** and Five Mile Point, previously described. The north
end of Burnt Island rises to 300 feet (91 m). The mainland
shore west of the channel between Frog and Burnt Islands is
low and swampy.



172 Burnt Island light (1121) is on the north tip of Burnt Island.

Outan Island, NE of Frog Island, lies near the centre of the large shallow bank which almost fills the west part of Nipigon Bay.

174 A **shoal** with a depth of 4 feet (1.2 m) lies 1.7 miles SSE of Outan Island.

175 The west edge of the channel south of Frog Island, and the east edge of the channel west of Frog Island, are marked by **buoys**.


The west side of Frog Island in line with the east side of Burnt Island, bearing 331°, leads from abreast of Pointe à la Gourganne to a position SSE of Frog Island.

Lake Superior Black Bay and Approaches Thunder Bay

General



- This chapter covers the north shore of Lake Superior from Agate Point, close west of Nipigon Strait, to Pigeon Point 63 miles to the SW, near the boundary between the United States of America and Canada. It also includes a description of Isle Royale. The Port of Thunder Bay is the main harbour in this area.
- 2 Sailing courses recommended by the *Canadian Shipowners Association* and the *Lake Carriers Association* for approaching and leaving the Port of Thunder Bay are shown on *Charts 2300, 2301 and 2302*.
- The Canadian charts of this area are based on Canadian surveys carried out between 1903 and 1905, with the exception of Black Bay which is based on a 1918 Canadian survey, and the Port of Thunder Bay which is based on a 1959 survey. The whole of Thunder Bay north of Pie Island was re-surveyed in 1974 and 1975 and any dangers to navigation discovered during this survey have been added to the charts.
- United States surveys in the vicinity of Passage Island were carried out in 1925 and 1926. The area north of and close around Isle Royale was surveyed in 1938. Offshore areas south of Isle Royale were surveyed in 1956 and 1957.
- Depths and elevations quoted in this chapter refer to chart datum (see Sailing Directions booklet CEN 300 General Information, Great Lakes) and thus agree with charted values. Because Charts 2301, 2302, 2311 and 2313 are based on older water level datums, depths and elevations on these charts must be corrected to refer them to the presently adopted datum for Lake Superior. The required correction is noted on the chart. (More information on the older water level datums is given in Sailing Directions booklet CEN 300 General Information, Great Lakes.)
- Real-time water level information for the Port of Thunder Bay is available from the *Canadian Hydrographic Service Automated Water Level Gauge*, telephone number 807-344-3141. (More information on water levels is given in Sailing Directions booklet CEN 300 General Information, Great Lakes.)
- 6 Caution. Magnetic observations by the United States Lake Survey in 1928 showed magnetic irregularities around Isle Royale. Large magnetic disturbances

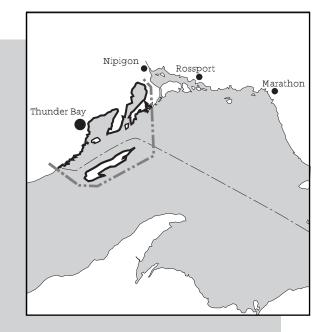

have also been reported near Pigeon Point, Pie Island, Welcome Islands, Thunder Cape, Point Porphyry and Magnet Island. Mariners using magnetic compasses should exercise particular caution at night or in reduced visibility.

Nipigon Strait to Black Bay

Chart 2302

- The coast between **Agate Point** (48°36′N, 88°12′W), close west of the entrance to Nipigon Strait, and **Magnet Point**, 18.5 miles to the SW, is fronted by a chain of islands and shoals with a deep inside passage.
- 8 The main inside passage is marked near its SW end by a light north of Shaganash Island. The narrowest part of the passage, NE of Lasher Island, is only 0.1 mile wide.
- 9 Caution. There are magnetic anomalies near Magnet Point at the west end of the abovementioned passage. Vessels using magnetic compasses should exercise great caution near the west end of this passage. Navigating with the aid of a magnetic compass is dangerous here, especially when leading marks are not clearly visible.
- The Paps, twin cone-shaped hills north of Magnet Point, and the high land 1 mile NW of Agate Point are the most prominent features from a distance. The Sleeping Giant, 15 miles WSW of Magnet Point, is **conspicuous** and makes a good reference point.
- Otter Cove, with easy access 2.5 miles west of Agate Point, and in the approaches to Black Bay north of Edward Island. Loon Harbour, close SSW of Lasher Island, offers perfect shelter for smaller vessels. The anchorage at Loon Harbour is 0.2 mile wide and is entered from the main inside passage.
- 12 (Spar and Lamb Islands, east of Agate Point, lie in the approaches to Nipigon Strait and are described in Chapter 6.)
 13 There is a steep cliff on the west side of Agate Point, 1.5 miles SW of Spar Island. A small **rock** 0.1 mile east of the point is 4 feet (1.2 m) high and surrounded by shoal water. **Agate Cove**, west of Agate Point, is deep and open to the south.
- Hawk Island, 1 mile SSW of Agate Point, is 60 feet (18 m) high. Roche Debout Point lies1.2 miles WNW of Hawk Island. Boulders extend 0.2 mile south from Roche Debout Point. Herron Point is 0.7 mile west of Roche Debout Point and has bold cliffs and deep water close to shore on the west side.
- Pleasant Harbour, between Herron Point and Roche Debout Point, is **foul**. A patch with a depth of 26 feet (7.9 m) lies 0.5 mile SSW of Herron Point.

- There is a deep-water passage between Herron Point and **Otter Island**. Both entrance points are **conspicuous**.
- Anchorage with good shelter can be found 2 miles NNE of Otter Island near the head of Otter Cove in 5 to 9 fathoms (9.1 to 16.5 m), mud. Small craft with draughts up to 11 feet (3.4 m) can navigate the narrows at the north end of Otter Cove. There is shelter from all winds in the basin beyond the narrows, with good holding ground, mud bottom.
- Marcil Bay is on the east side of the entrance to Shesheeb Bay, an inlet on the mainland shore NW of Herron Point. Roche Debout Channel, between Otter Island and Shesheeb Point, is the entrance to Shesheeb Bay. A 12-foot (3.7-m) shoal lies 0.2 mile off the NE part of Shesheeb Point. Shesheeb Bay is open to the SE and too deep to make a good anchorage. Manuel Rock, 0.4 mile west of Otter Island, has a depth of 10 feet (3 m).
- Hawk Island just visible south of Herron Point bearing 097°, and two points at the SE entrance of Marcil Bay in line bearing 349°, will clear Manuel Rock.
- Lowrey Island, 1.5 miles WSW of Herron Point, is 34 feet (10 m) high. A shoal ledge extends to the south and east.
- Brodeur Island (48°33′N, 88°18′W), separated from Lowrey Island by the main inside channel, is the largest of the islands off this section of the coast. It is thickly wooded and 300 feet (91 m) high to the top of the trees. Montgomery Island, south of Brodeur Island, is 60 feet (18 m) high. Several shoals and rocks with depths of less than 6 feet (1.8 m) lie up to 0.5 mile east of Brodeur and Montgomery Islands.
- Anchorage for small craft with protection from all except NE winds can be found in the cove on the NE side of Brodeur Island. The shores of this cove are steep and the bottom is rock and mud offering good holding ground, but sunken logs may be encountered.
- Arthur Island, 20 feet (6.1 m) high, lies north of the main inside passage 0.5 mile west of the north end of Brodeur Island. A **shoal spit** extends 0.15 mile NE from its north point.
- Coutlee Island is south of Arthur Island, south of the passage. A **shoal spit** extending northward 0.1 mile from Coutlee Island narrows the channel to a width of 0.15 mile. The deepest water is on the Arthur Island side of the channel.
- Pugsley Island, Newton Island and Bachand Island extend southward from Coutlee Island. Deep channels lie on both sides of this chain of islands. A rock patch with less than 6 feet (1.8 m) of water extends 0.1 mile east of the south end of Coutlee Island in the east channel. There is deep water close to the west shore of Brodeur Island.



The long thickly wooded point west of Arthur Island rises to a height of 200 to 300 feet (61 to 91 m).

A small **wharf** at the SW end of this point is known as **Black's Wharf**.

- The main inside channel is only 0.1 mile wide between a small island 28 feet (8.5 m) high, close south of Black's Wharf, and **Gordon Island** lying 0.3 mile west of Coutlee Island. There is deep water close south of the small island. **Shoal rocks** extend 300 feet (91 m) north from the east point of Gordon Island.
- Helen Island, west of Black's Wharf, together with Jobin Island and Davies Island to the north, forms the west side of a snug small-craft harbour. The passage between Helen and Jobin Islands is known as Clark Bay. A rock submerged less than 6 feet (1.8 m) lies close off the NE side of Helen Island.
- 29 **Sarah Island** (48°33'N, 88°22'W) lies NW of the main inside route. There is a small **rock**300 feet (91 m) off its NE end.
- Lasher Island, south of Helen Island, is surrounded by deep water except on its SE side. **Spain Island** (48°31′N, 88°22′W), with cliffs on its north and NW sides, is on a shallow bank on the east side of the main inside route together with **Borden Island** and **Chapleau Island**.
- Loon Harbour separates Lasher Island from Spain and Borden Islands to the south. The ruins of a logging operation are on the north end of Spain Island.
- An **anchorage** 0.3 mile from the west entrance of Loon Harbour offers perfect shelter from all winds in 7 to 8 fathoms (12.8 to 14.6 m), mud and clay. A small island sits on a **shoal spit** that extends north from Borden Island. The spit divides the harbour into two parts. Loon Harbour can be entered from east or west but the east entrance is narrow and difficult. The deep west entrance is 0.1 mile wide, between steep shorelines.
- Swede Island is on the SE side of the main inside route, SW of Spain Island. The island has deep water along its NW side but has a **shoal ledge** 300 feet (91 m) wide along its west side.
- A **shoal spit** with a depth of 8 feet (2.4 m) at its outer end extends 0.2 mile NNE from the north point of Swede Island. **Rex Island**, 0.4 mile NNE of Swede Island, is 15 feet (4.6 m) high.
- Cartwright Island (48°29'N, 88°23'W) and Sweetland Island, close south of Cartwright Island, are separated from Swede Island by a deep channel 300 feet (91 m) wide. Boardman Rock, 0.1 mile south of Swede Island and 9 feet (2.7 m) high, is on a shoal that lies in the SW entrance to this channel. A rock 0.3 mile south of Boardman Rock is 15 feet (4.6 m) high. The rock is surrounded by a very abrupt shoal ledge 0.1 mile wide, in the south entrance to the channel.

 There is a deep passage NE of these islands, with Chapleau, Spain and Borden Islands on its NE side. The passage is 0.2 mile wide, but the north entrance is restricted

- to half that width by Rex Island. The four **Evelyn Rocks**, 0.6 mile east of Sweetland Island, are in the southern approaches to the passage. All but the easternmost of the rocks are wooded, and the tallest is 30 feet (9.1 m) high. The channel between Sweetland Island and Evelyn Rocks has many **shoals**. **Grenfell Rock** lies 0.4 mile NNW of the easternmost Evelyn Rock. Grenfell Rock is small and has **shoal** water extending 0.2 mile to the south.
- Gourdeau Island, 0.4 mile NW of Swede Island, is 125 feet (38 m) high near its north end. Shoal water extends 300 feet (91 m) off its south point. A shoal submerged 8 feet (2.4 m) lies 0.1 mile NE of the island. The main inside route passes between Gourdeau Island and Swede Island.
- Blaisdell Island, 0.4 mile NNE of Gourdeau Island, has deep water on its east side. The island is fringed by a **shoal ledge** on its north and west sides. Two small **rocks** lie 0.2 mile SW of the island.
- Zeolite Bay and Sturgeon Bay, both shallow, are separated by Zeolite Point. The bays are west and NW of Gourdeau Island. Bourbonnais Island, in the mouth of Sturgeon Bay, has a shoal ledge on its north, west and south sides. Girard Rock lies 0.8 mile west of Gourdeau Island and has a depth of 7 feet (2.1 m), dropping suddenly to deep water. Mood Island lies 0.7 mile WNW of Girard Rock. Hanbury Island lies 1 mile WSW of Mood Island.
- Hanbury Island and **Stanton Island** lie on a shallow bank which is separated from **Jean Pierre Point** by a deep passage 0.2 mile wide. A **shoal spit** extends 0.3 mile SSW from Jean Pierre Point.
- Anchorage can be found west of Hanbury Island in 8 fathoms (14.6 m), clay. This anchorage can be entered from either end. There is deep water close to the mainland shore if approaching from the north; a **shoal** extends off the north end of Hanbury Island.
- 42 **Hughes Island**, 1.2 miles SSW of Stanton Island, is 20 feet (6.1 m) high and surrounded by **shoal** water.
- Perley Island, south of the main inside passage, has deep water close to shore except at the bold south point. Detached **shoals** lie to the NE and east. The island is separated from Sweetland Island to the north by a deep passage 0.1 mile wide.
- Paterson Rocks is a detached shoal 0.2 mile south of Perley Island. Burpee Rock, another detached shoal, lies 0.3 mile west of the island. Irwin Rock, 0.8 mile SW of Perley Island, is small.
- Coates Island, 1 mile west of Perley Island, is 35 feet (10.7 m) high and has **shoal** water to the south and east. **Schaffner Rock**, 0.3 mile north of Coates Island, has a depth of 8 feet (2.4 m).
- Macoun Island, on a shoal ledge 1.7 miles west of Perley Island, is 35 feet (11 m) high. Blair Rock, 0.3 mile

north of Macoun Island, is 7 feet (2.1 m) high and has deep water close to its north side.

- Nest Island, 0.6 mile SSW of Macoun Island, is 16 feet (4.9 m) high. A shoal 0.3 mile to the SW has less than 6 feet (1.8 m). Ayre Shoal, 1.1 miles east of Nest Island, is submerged 6 feet (1.8 m).
- The east side of Perley Island in line with Irwin Rock, bearing 039°, leads 0.2 mile SE of Ayre Shoal. The SW side of Gourdeau Island touching the east side of Coates Island, bearing 357°, leads 0.1 mile east of Ayre Shoal. The summit of the east Pap in line with the north side of Nest Island, bearing 298°, leads 0.2 mile SW of Ayre Shoal.

Chart 2301

- The Paps (48°28′N, 88°31′W), on the mainland 2.6 miles SW of Jean Pierre Point, are two cone-shaped summits 0.2 mile apart. They are the most **conspicuous** features on this part of the shore. A flat-topped summit, 654 feet (199 m) high, 1 mile to the WNW does not show up well from offshore.

 The two **Barclay Islands**, 1.4 miles west of Macoun Island, lie in line ESE of **Bruneau Point**. There is a deep passage between the NW Barclay Island and Bruneau Point
- Island, lie in line ESE of **Bruneau Point**. There is a deep passage between the NW Barclay Island and Bruneau Point. The width of this passage is restricted to 450 feet (137 m) by a 10-foot (3-m) **shoal** close NW of the NW Barclay Island. The preferred route passes close to Bruneau Point.
- A **shoal spit**, with two small islands 4 and 5 feet (1.2 and 1.5 m) high, extends 0.2 mile east of the SE Barclay Island. A 7-foot (2.1-m) **shoal** lies 0.3 mile ESE of the island.
- Shaganash Island is 1 mile south of the Barclay Islands. It is surrounded, with the exception of its SE side, by small islands and **reefs**. **Number 10 Island**, 0.2 mile west of the NW end of Shaganash Island, is 20 feet (6.1 m) high with deep water close to its west side.



- 53 Shaganash light (1127) is on the west end of Number 10 Island.
- Magee Rock lies 0.5 mile NE of Shaganash Island and marks the NE end of **shoal** water extending off the island. The rock is small and has deep water close to its north side.
- Elson Rock, 0.6 mile NW of *Shaganash light* on the NW side of the main inside passage, is submerged less than 6 feet (1.8 m). **Bennett Island**, 0.8 mile north of *Shaganash light*, is obstructed on all but its NW side.
- Anchorage with fair shelter can be found west of **Kemp Shoal**, which lies 0.3 mile NW of Bennett Island.
- Shaganash light astern and the eastern Pap summit ahead bearing 327° leads to this anchorage from the SSE. Magee Rock astern and the western Pap summit trees bearing 306° lead in from the SE. The SE side of Hughes Island in line with the end of Bruneau Point, bearing 029°, leads 0.15 mile NW of Kemp Shoal. There are many dangers in the area.

- Cargill Island is separated from the SE side of Shaganash Island by a deep passage 0.1 mile wide. **Harty Rock**, 0.3 mile SW of Cargill Island, is submerged less than 6 feet (1.8 m).
- The west side of the east Barclay Island in line with *Shaganash light*, bearing 022°, leads0.1 mile west of Harty Rock.
- St. Andrew Island, 0.4 mile SE of Cargill Island, and Tyrwhitt Island, 0.4 mile SE of Shaganash Island, are surrounded by numerous shoals up to 0.5 mile offshore. A narrow reef extends 0.5 mile NNE from a small rock, 2 feet (0.6 m) high, 0.4 mile north of Tyrwhitt Island. A deep channel 0.5 mile wide lies between this reef and Nest Island, 0.8 mile to the ENE. Poynter Rock, 0.7 mile SSW of Cargill Island and quite small, marks the end of foul water south of Cargill Island and Shaganash Island.
- Tunnel Island, 1.4 miles WSW of Shaganash Island, is 30 feet (9.1 m) high. The south side of the island is a steep slope and makes a good mark for picking up the channel.
- 62 **Caution**. A 9-foot (2.7-m) **shoal** lies 0.5 mile ENE of Tunnel Island. This danger is close NW of the channel leading through the main inside passage.
 63 Tunnel Island touching *Shaganash light*, bearing 230°, leads 0.2 mile SE of the shoal off Barclay Islands and
- 0.1 mile NW of Blair Rock.

 64 Caution. It is unsafe to rely on magnetic compass bearings in this area.
- eastbound. The usual route begins from a position 1 mile off Point Porphyry with the light bearing 320°. The first leg leads toward the NW coast of Shaganash Island, with *Point Porphyry light* kept visible. Magnet Point in line with the south side of Tunnel Island, with *Point Porphyry light* just disappearing, marks the first course alteration point. The second leg of the route passes 0.1 mile west of *Shaganash light*.
- The second alteration point is past *Shaganash light*, clear of the shoal area NE of Number 10 Island. The course is gradually altered to starboard on the third leg of the route, until *Shaganash light* touches Tunnel Island, bearing 230° astern. This course leads clear of the shoal water extending ESE of Barclay Islands. A third alteration is then made to pass midway between Gourdeau and Swede Islands.

Approaches to Black Bay

Charts 2301, 2313

The approach to Black Bay, between Magnet Point at the tip of Black Bay Peninsula and **Middlebrun Point** on Sibley Peninsula, is divided into three channels by islands, rocks and shoals. **Magnet Channel** passes between Magnet and Edward Islands. **Montreal Channel** lies between Edward

Island and a group of islands and shoals to the west. This channel is the safest, being wide and nearly free of obstructions and with *Point Porphyry light* as a guide. **Middlebrun Channel**, with Copp Rock near its north end, passes east of Middlebrun Point.

- 68 Caution. Local magnetic anomalies have been recorded in the vicinity of Magnet Island and Point Porphyry. Mariners using magnetic compasses should exercise particular caution at night or in reduced visibility in Magnet Channel, Montreal Channel and Middlebrun Channel.
 69 The entrance to Black Bay is 9 miles north of *Point Porphyry light*, between George Point and Kidd Point.
- Magnet Point $(48^{\circ}25'N, 88^{\circ}34'W)$ is low and difficult to see. It is named after the **magnetic anomalies** of the area. **Magnet Island**, 0.1 mile SW, is joined to the point by a very shallow ledge which surrounds the island. A small **rock**, 10 feet (3 m) high, is near the southern edge of this ledge 0.3 mile south of the island.
- 71 **Porphyry Island** (48°21′N, 88°38′W), 3 miles SW of Magnet Island, is surrounded by a **shoal ledge** which joins its NW side to **Edward Island**. Both islands are high and wooded. **Point Porphyry** is the SW point of the island.
- 72 Point Porphyry light (1128) is on the SW end of the point.
- 73 Small craft with draughts up to 7 feet (2.1 m) can enter the cove on the west side of the island, 0.7 mile NE of *Point Porphyry light*, in calm seas and with local knowledge.
- 74 **Caution**. The channel between Edward and Porphyry Islands is shallow and has many **rocks** but is sometimes used by small craft. There are strong **currents** which frequently change direction in this channel.
- Porphyry Reef lies 0.2 mile SE of Point Porphyry and has depths less than 6 feet (1.8 m). A **shoal spit** extends 0.1 mile SW from Point Porphyry.
- 76 **Caution**. Magnet Channel, which passes east of Edward Island, has local **magnetic anomalies**. Navigating with the aid of a magnetic compass is dangerous, especially when the leading marks are not clearly visible.
- 57 Sybil Island lies 300 feet (91 m) inside the NW edge of the ledge that extends west of Magnet Island. The island is 20 feet (6.1 m) high and makes a good mark for Magnet Channel. A rock 8 feet (2.4 m) high and another rock submerged less than 6 feet (1.8 m) lie close to the edge of the ledge 0.2 mile SW of Sybil Island.
- Lennox Rock, 0.7 mile south of Magnet Island, has a depth of 6 feet (1.8 m) and is the outermost danger south of Magnet Island. A **shoal** with least depths of 14 feet (4.3 m) lies 0.4 mile NW of Lennox Rock. **Sloan Bank**, submerged 28 feet (8.5 m), lies 1.1 miles east of Lennox Rock.

- 79 Shaganash light open to the SE of Tunnel Island by the width of the latter, bearing 047°, will pass 0.2 mile SE of Lennox Rock. The magnetic compass is useless in this area.
- 80 **Dreadnought Island**, 0.8 mile east of *Point Porphyry light* and 0.5 mile ENE of Porphyry Reef, is 36 feet (11 m) high. The central part of the island is wooded.
- Monk Island, 1.4 miles NNE of Dreadnought Island, is 20 feet (6.1 m) high. This island is on a **shoal ledge** which extends out from the NE end of Porphyry Island. A small **rock** 0.3 mile NE of Monk Island is submerged less than 6 feet (1.8 m).
- Small islands and **foul** water extend 0.4 mile off the middle of the SE side of Edward Island, 0.6 mile NE of Monk Island. A **shoal** 0.2 mile east of this foul area has 15 feet (4.6 m) of water. This shoal is only 0.1 mile west of the leading line for entering Magnet Channel.
- The bottom falls away quickly off the north end of the NE point of Edward Island, but depths of 14 feet (4.3 m) extend 0.15 mile to the east.
- The coast is fringed by a **shoal ledge** with several **boulders** between Magnet Point and **Cowie Point**, 2.7 miles to the NNW. **Seagram Rock**, 1.1 miles NNW of Magnet Point, is submerged 4 feet (1.2 m). A **rock** 0.2 mile west of Seagram Rock has a depth of 18 feet (5.5 m).
- Two **rocks**, one submerged less than 6 feet (1.8 m) and the other submerged 18 feet (5.5 m), lie 0.4 mile SSW and 0.3 mile SW of Cowie Point, respectively.
- George Point, 1.7 miles NNW of Cowie Point, is the east entrance point to Black Bay. A depth of 13 feet (4 m) is found 0.3 mile SW of the point, but 0.1 mile beyond this the water is deep.
- 87 **Miles Bay**, 1.5 miles north of Cowie Point and east of George Point, offers **anchorage** with shelter from northerly winds in 21 feet (6.4 m), mud.
- The west side of Cowie Point touching the NE end of Edward Island, bearing 008°, leads into Magnet Channel from the south. This leading line clears the shoals lying off the east side of Edward Island by 0.1 mile and passes 0.2 mile west of the shoal ledge extending from Magnet Island.
- Hardscrabble Island, 0.5 mile west of Porphyry Island, is 50 feet (15 m) high.
- Clark Island, 3 miles west of *Point Porphyry light*, is the southern island of the group which separates Montreal and Middlebrun Channels. Small **rocks** lie close to the NE end of the island. **Carney Rock**, 0.4 mile east of Clark Island, is 12 feet (3.7 m) high. Two small drying **rocks** lie 0.1 mile east and a small drying **rock** lies 0.3 mile NE of Carney Rock. **Gravel Island**, 0.9 mile NE of Clark Island, is on a wide **shoal ledge**. **Cranberry Island** is on a smaller ledge 1 mile to the NNE.
- Montreal Channel has Porphyry, Hardscrabble, and Edward Islands on its east side and Clark, Gravel and

Cranberry Islands on its west side. It has a least width of 1.5 miles and is free from shoals. A mid-channel course may be taken. In poor visibility the land on the Edward Island side of the channel shows up much better than the low islands to the west.

Hardscrabble Island, offers sheltered anchorage for small craft. A mid-channel route is favoured when entering.

Edward Harbour, entered 0.8 mile north of Hardscrabble Island, offers anchorage for small craft in its SE corner, south of a small island. Little Gibraltar Rock, 15 feet (4.6 m) high, is easily identifiable in the entrance to the harbour, close south of the NW entrance point.

Osler Bay, 1 mile north of Edward Harbour, is quite open to the SW.

95 **Grey Island** and **Arno Island**, north of Edward Island, are surrounded by a **shoal ledge**. The SE side of the ledge narrows the channel between Grey and Ariel Islands to a width of 0.1 mile.

96 Anchorage with perfect shelter from southerly winds can be found 0.2 mile east of Ariel Island off the north shore of Edward Island in 19 feet (5.8 m), clay.
97 Middlebrun Channel is entered between Middlebrun Point and Clark Island. Copp Rock,0.3 mile WNW of Cranberry Island, has a depth of 16 feet (4.9 m). A shoal with 19 feet (5.8 m) lies 0.6 mile west of Cranberry Island.

Finlay Bay, 4 miles west of *Point Porphyry light*, is entered between Middlebrun Point and Finlay Point. The bay has a depth of 17 feet (5.2 m) but there is 10 feet (3 m) or less in the entrance. Foster Point lies 1.6 miles NNE of Finlay Point.

George Point. **Squaw Bay**, west of Kidd Point, is shallow and has **rocks** in its centre. A **wharf** on the SW shore of the bay is reported to be in disrepair (1980). Good **anchorage** with shelter from westerly winds can be found off the entrance to Squaw Bay. **Squaw Island**, 1.5 miles NE of Kidd Point, is joined to the mainland by **shoal** water.

The usual approach to Middlebrun Channel from the west stays 0.3 mile clear of Sand Islands and leads towards the gap between Arno and Grey Islands, bearing 040°. This gap is kept well open; a course with the islands touching leads over Copp Rock. Larger vessels alter course to the north when they reach a position east of the north side of Finlay Point. A course of 012° with Foster Point ahead for a distance of 0.7 mile or until the north side of Cranberry Island bears 099° avoids the 19-foot (5.8-m) shoal.

Black Bay

Chart 2313

Black Bay (48°40′N, 88°25′W), entered between George and Kidd Points, is 23 miles long and 9.5 miles wide near its north end. The east coast is steep and 150 to 200 feet (46 to 61 m) high for14 miles. The coast is low farther north, fronted by sand beaches with swampy land behind. A hill9 miles NE of Copper Point is 446 feet (136 m) high and prominent.

The north and west sides of the bay are low but a hill on the west coast 14.5 miles ENE of Kidd Point is 250 feet (76 m) high and **prominent**. The shores are fronted by a shallow ledge. There is a deep-water passage up the middle of the bay, extending for 14 miles to Green Island. Small islands and **shoals** obstruct the head of the bay beyond Green Island.

The east side of Black Bay from George Point to **Copper Point** (48°32′N, 88°33′W) is fringed by a shallow ledge 0.5 mile wide. **Louise Bay**, close east of Copper Point, is a small cove formerly used to assemble timber for shipping. Vessels with draughts up to 13 feet (4 m) can enter. The entrance is narrowed by a 9-foot (2.7-m) **shoal** 0.3 mile ENE of the tip of Copper Point. There are **cribs** at the south end of this cove and there are many deadheads stuck in the sand bottom.

of 9 to 10 feet (2.7 to 3 m) begins 2.3 miles NE of Copper Point and continues for a distance of 2.7 miles. The reef runs parallel to the shore, 0.6 mile off.

George Point in line with Copper Point, bearing 206°, leads well west of the above-mentioned reef.

106 **Pearl River** enters the west side of Black Bay 8.2 miles NNE of Kidd Point. **Cribs** at the mouth of the river were used for collecting logs floated down Pearl River.

Bent Island (48°37′N, 88°32′W) is the SE end of a gravel and boulder bar that extends SE from the west shore. Nuttall Island, 2.7 miles NNE of Bent Island, is joined to the shore by a gravel and boulder bar.

108 **Green Island**, 2 miles NNE of Nuttall Island, is 67 feet (20 m) high.

109 **Enterprise Bay** is a slight indentation in the face of a headland 1 mile NW of Green Island. A hill 250 feet (76 m) high stands just north of this bay, forming the most **prominent** feature on the west side of Black Bay. **McEachan Island**, 52 feet (16 m) high, is separated by **shoal** water from the point on the south side of Enterprise Bay.

Historical note. — The area off Enterprise Bay was once an **anchorage** for barges used in the pulpwood trade in Black Bay.

Granite Island, 2 miles NE of Green Island, is 115 feet (35 m) high. Two rocks 8 and 9 feet (2.4 and 2.7 m)

high lie 0.2 and 0.4 mile east of Granite Island. Ships with draughts up to 18 feet (5.5 m) can pass west of Granite Island but except for small tugs, vessels seldom proceed farther north.

- Ham (Mary Ellen) Point (48°47′N, 88°20′W), low, is the only point on the NE side of Black Bay. **Scimming Island** lies 1.5 miles SW and **Delaney Island** lies 1.7 miles NW of Ham Point. **Old John Rock**, 1 mile east of Delaney Island, has a depth of less than 6 feet (1.8 m).
- of Granite Island, is a **boulder shoal** submerged less than 6 feet (1.8 m). It is the most dangerous shoal in Black Bay.
- Ham Point touching the SE side of Scimming Island, bearing 035°, leads close NW of Foxhound Rock.
- 115 **Dorion Landing** is a community on the west side of the bay 5 miles NW of Granite Island. A private **wharf** at Dorion Landing is in ruins (1999). The township of **Dorion**, 3 km inland, has a post office. The land rises to a small hill 120 feet (37 m) high 0.5 mile north of the landing.
- 116 **Cold Water Creek**, 1.2 miles NNE of Dorion Landing, is shallow and filled with deadheads. The mouth of **Wolf River** is 1.5 miles NE of Cold Water Creek.
- Hurkett Cove, at the NNW end of Black Bay, is entered through a narrow unmarked dredged channel with depths of 7 feet (2.1 m) (1980). The community of **Hurkett** is close north of the cove. The main railway lines pass through the community and the *Trans-Canada Highway* is a short distance to the north.
- The Public **wharf** at Hurkett Cove is close inside the north entrance point of the cove. The structure extends 213 feet (65 m) from shore and the outer usable part, 59 feet (18 m) long, is of wooden construction. There is a depth of 7 feet (2.1 m) (1999) at the outer end and 3 to 7 feet (0.9 to 2.1 m) along the east and west faces. This wharf is used by commercial fisheries.
- 119 Nuttall's Air Service operates floatplanes from a facility west of the Public wharf.
- Black Sturgeon River enters Black Bay 2 miles NW of Delaney Island. Piles are positioned in a straight line across the bar at the entrance to the river. Logs were once rafted in the mouth of this river.

Approaches to Thunder Bay

Chart 2301, 2302

Bateau Rock $(48^{\circ}16'N, 88^{\circ}06'W)$ is a dangerous dry rock, surrounded by shoals, 13 miles ENE of Isle Royale. The areas surrounding Bateau Rock and Gull Islands, 6 miles to the west, should be avoided because of off-lying shoals.

Isle Royale

ENCs US4MN22M, US5MI78M Charts 14968, 14976

[from U.S. Coast Pilot 6, Chapter 13, partial]

- 122 ENCs US4MN22M, US5MI78M Charts 14968, 14976.—Isle Royale is 44 [38] miles long NE and SW and has a maximum width near its SW end of 8.5 [7.4] miles. Mount Desor, 794 feet [242 m] above the lake and the highest point on the island, is 12.5 [10.9] miles from the SW end. The shores of the island have numerous indentations and many detached islets and reefs, almost all with a NE and SW trend. Good lees can be found in many bays and channels.
- 123 **Local magnetic disturbance.**—Magnetic disturbances have been observed around Isle Royale.
- 124 Isle Royale and its surrounding islands form Isle Royale National Park. The park is retained as much as possible in its natural state. There are no roads, only trails for hikers.
- 125 Recreational docks operated by concessions for the National Park Service at Rock Harbor, and at Windigo Ranger Station at Washington Harbor, offer groceries, gasoline, and water for the convenience of visitors. Small docks, generally in good repair and in sheltered areas, are maintained at the many campsites around the island. Most of them have from 5 to 10 feet [1.5 to 3 m] at their outer ends. Lights are operated on the docks at Windigo, Rock Harbor, and the Park Service Headquarters dock on Mott Island on the SW side of Rock Harbor. Complete details regarding the island and its use are available from the Superintendent, Isle Royale National Park, 87 N. Ripley Street, Houghton, MI 49931.
- 126 Caution.—Designated aircraft landing areas are in Washington Harbor, Rock Harbor, and Tobin Harbor. (See 36 CFR 2.2 and 7.38, chapter 2 [of Coast Pilot 6], for limits and regulations.)
- Royale, forms the south entrance point to Duncan Bay. **Blake Point Light** (48°11'28"N., 88°25'20W.), 40 feet [12.2 m] above the water, is shown from a skeleton tower and a red and white diamond-shaped daymark on the point. An 11-foot [3.4-m] shoal is 0.3 [0.26] mile east of the light. **Five Foot Reef**, 0.9 [0.8] mile east of the light, has a least depth of 4 feet [1.2 m] and is marked on the south side by a buoy. A 13-foot [4-m] shoal is 1.2 [1] miles east of the light.
- Passage Island Light (48°13'25"N., 88°21'56"W.), 78 feet [23.8 m] above the water, is shown from an octagonal tower on the southwest end of Passage Island, MI, 3.5 [3] miles northeast of Blake Point. A mariner radio activated sound signal and racon are at the light. The sound signal is initiated by keying the microphone five times on VHF-FM channel 83A.

- 129 **Gull Islands** are 3.5 [3] miles NE of Passage Island. A shoal covered 2 feet [0.6 m] is 0.5 [0.4] mile S of the islands, and a group of detached rocky spots, covered 7 to 12 feet [2.1 to 3.7 m], is 0.7 to 2.5 [0.6 to 2.2] miles NW of the islands.
- 130 **Todd Harbor**, about midlength of the N shore of the island, is about 5 [4.3] miles long and indents the shore 0.75 [0.65] mile. The harbor affords good protection from all but N winds. Care must be taken to avoid the many detached shoals and rocks in the harbor.
- 131 From Todd Harbor to McCargoe Cove, the shore should be given a berth of 1 [0.9] mile. Hawk Island parallels the shore in this stretch. An islet and rocks awash are 0.8 [0.7] mile SW of Hawk Island. A 3-foot [0.9-m] shoal is 0.15 [0.13] mile N and rocks awash are 0.75 [0.65] mile NNE of the island.
- McCargoe Cove, about 4.5 [3.9] miles NE of Todd Harbor, is a narrow inlet that extends over 2 [1.7] miles SSW into the shore of Isle Royale. A rocky ledge extends NE from the W side of the entrance and is marked at the outer end by a private buoy. The cove is entered between this and another private buoy close NNW. Coming around the ledge, vessels must turn through 090° on a radius of about 200 feet[61 m] to keep in depths of 18 feet [5.5 m] or more. The channel into the cove has a least depth of 15 feet[4.6 m], but inside depths are 30 to 40 feet [9.1 to 12.2 m]. Small docks are on **Birch Island** on the E side of the cove entrance and near the head of the cove.
- The NE end of Isle Royale, quite rugged and broken, 133 consists of many peninsulas, islands, and ridges separated by narrow channels and bays of deep water, all with a NE trend. The area is obstructed by numerous shoals and reefs which render navigation dangerous. Amygdaloid Island, Canoe Rocks, and the line of islands and reefs between them form the N limit of this area from McCargoe Cove NE for 10 [8.7] miles. Amygdaloid Ranger Station is on the SW end of Amygdaloid Island. Amygdaloid Channel parallels the S side of Amygdaloid Island and is separated from **Robinson Bay** by a narrow peninsula, Belle Island, Green Island, and a series of small islands and reefs. A small-craft dock is on the S side near the E end of Belle Isle. Hill Point, the SE entrance point to Robinson Bay, separates it from Five Finger Bay. A peninsula that terminates in **Locke Point** separates the S side of Five Finger Bay from Duncan Bay. A reef that extends 0.3 [0.26] mile NE from Locke Point is marked at the outer end by a buoy.
- Duncan Bay, entered at the NE end of Isle Royale between Locke Point and Blake Point, extends about 4.5 [3.9] miles SW. A point about 1 [0.9] mile above the entrance divides the bay. The main body of the bay leads S of the point, through a narrow passage to a large bay. A rock awash is in midchannel of the narrowest part of the passage S of the point. The channel, S of the rock, has depths less than 12 feet

- [3.7 m]. A 17-foot [5.2-m] shoal is near midchannel S of the point that divides the bay. A small dock is on the S side of the narrow passage.
- 135 **Tobin Harbor** parallels Duncan Bay on the S side of Blake Point. **Scoville Point** is on the NE end of the peninsula that encloses the S side of the harbor. The harbor has good holding ground with protection from all winds, but is available only to small craft because of the narrow entrance. A dock is on the N side of the harbor about 1.1 [1] miles SW of Scoville Point.
- 136 **Rock Harbor**, S of Tobin Harbor, is about 13 [11.3] miles long NE and SW. The outer 9.5 [8.3] miles of the harbor is enclosed on the S side by a chain of islands and shoals. The harbor has good holding ground with protection from all winds. The fully enclosed W 3.5 [3] miles of the harbor is obstructed near its midlength by shoals through which an 11-foot [3.4-m] channel is marked by buoys.
- North Government Island and South Government Island. Another wide, deep passage enters the harbor from S opposite Scoville Point. Middle Islands Passage enters the harbor from S at the inner end of the island chain. The channel has an available depth of 26 feet [7.9 m] and is marked by a lighted bell buoy and two unlighted buoys. A 14-foot [4.3 m] shoal was reported in the entrance to Middle Island Passage at about 48°05'22"N., 88°34'20"W.; mariners should transit the area with caution. Caribou Island is on the E side of the passage.
- Rock Harbor Lodge is in a bight on the N side of Rock Harbor, 2 [1.7] miles SW of Scoville Point. A 12-foot [3.7-m] spot off the E entrance point to the bight is marked by a buoy. A wharf marked by a private light on the N side of the bight provides gasoline, diesel fuel, water, sewage pump-out, and electricity. Transient berths are available at several piers in the bight.
- 139 The National Park Headquarters is in a bight on the NW side of Mott Island, 1.6 [1.4] miles NE of Middle Islands Passage. The wharf at the headquarters has depths of 20 feet [6.1 m] at the outer end, decreasing to 13 feet [4 m] at its midlength, and with the inner end available for small boats. Gasoline, sewage pump-out facilities, and a hoist that can handle 60-foot [18.3-m] craft for emergency repairs are available.
- 140 **Ferries**.—A ferry service operates between Copper Harbor on the Keweenaw Peninsula and Rock Harbor in the summer. The schedule is available from Superintendent, Isle Royale National Park, 87 N. Ripley Street, Houghton, MI 49931.
- 141 From Middle Islands Passage, the shore of Isle Royale extends S for 2 [1.7] miles and thence SW for 23 [20] miles to the head of Siskiwit Bay. This bay parallels the shore in the SW 12 [10.4] miles of this reach and is enclosed

on the S by a chain of islands and reefs. From Middle Islands Passage to Chippewa Harbor, shoals extend no more than 0.2 [0.17] mile from shore.

- 142 **Conglomerate Bay**, 0.8 [0.7] mile S of Middle Islands Passage, has deep water and good protection from all but E winds.
- 143 **Chippewa Harbor**, 5.4 [4.7] miles SW of Middle Islands Passage, extends 2 [1.7] miles W and SW into the shoreline of Isle Royale. The harbor is divided into deepwater areas by two narrows. Depths are about 14 feet [4.3 m] through the first narrows and about 10 feet [3 m] through the second. A dock is on the N side of the harbor just inside the first narrows.
- 144 From Chippewa Harbor, the shore is free of outlying obstructions for about 6 [5.2] miles to **Schooner Island** where shoals and submerged rocks extend 0.4 [0.35] mile from shore.
- Malone Bay, just W of Schooner Island, is an indentation 3.5 [3] miles wide, open to S except for protection behind Hat Island, Ross Island, Malone Island, and Wright Island. Shoals around these and other small islands, as well as numerous detached shoals, render navigation of Malone Bay hazardous.
- A channel with a depth of about 18 feet [5.5 m] extends into Malone Bay between Malone Island and Wright Island. The channel is marked by buoys that mark dangerous shoals on either side of the channel. The bay has protection from all winds in depths of 36 to 48 feet [11 to 14.6 m], mud and clay bottom. Malone Bay Ranger Station is on the NE side of the bay.
- 147 **Hopkins Harbor** is a sheltered inlet in the W side of Wright Island. A wharf on the S side of the inlet has depths of 15 feet [4.6 m] alongside. Caution is advised when entering the inlet, because submerged boulders extend from the N side of the entrance.
- 148 **Siskiwit Bay**, 12 [10.4] miles long and 1.5 to 3 [1.3] to 2.6] miles wide, is the largest indentation on the island. The bay has protection from all but NE to E winds. Good holding ground is 1.5 [1.3] miles S of Wright Island. A dock on the S side near the head of the bay has a depth of 6 feet [1.8 m] at the outer end. The bay is enclosed on the S side by a peninsula that terminates in **Point Houghton** (47°54'06"N., 88°54'00"W.) and by a double line of islets and reefs that extends 8 [7] miles NE from the point, parallel to the S shore of Isle Royale. Houghton Point Passage, the only passage through the chain, is 0.5 [0.4] mile E of Point Houghton. The passage, marked by buoys, has a depth of about 17 feet [5.2 m]. In 2005, depths of 12 feet [3.7 m] were reported in the passage. Harlem Reef, with a least depth of 2 feet [0.6 m], is on the S side of the islet chain, 2.8 [2.4] miles E of Point Houghton. A buoy marks the S side of the reef.
- 149 *Isle Royale Light* (47°56′53″N., 88°45′40″W.), 72 feet [21.9 m] above the water, is shown from a white oct-

- agonal tower with an attached dwelling on **Menagerie Island**, near the outer end of the islet chain on the S side of Siskiwit Bay. **Glenlyon Shoal**, with a least depth of 4 feet [1.2 m], is 0.7 [0.6] mile NE of the light, and an 18-foot [5.5-m] spot is 1.3 [1.1] miles NE of the light.
- extends about 13 [11.3] miles SW to **The Head**, the southernmost point of the island. Numerous ledges and rocky spots obstruct this stretch, and it should be given a berth of at least 1 [0.9] mile. **Fishermans Home**, a small cove 0.9 [0.8] mile SW of Point Houghton, has a commercial fishing operation with two docks. A narrow channel with a depth of 5 feet [1.5 m] leads along the N side of the entrance into the cove. The entrance is deceptive and must be navigated with caution.
- 151 From The Head, the shore extends NW for 4 [3.5] miles to Cumberland Point on the S side of Grace Harbor.
- Rock of Ages Light (47°51′59″N., 89°18′53″W.), 130 feet [39.6 m] above the water, is shown from a white conical tower on a small islet 3.8 [3.3] miles W of Cumberland Point, the southwesternmost point of Isle Royale.
- A reef extends 0.4 [0.35] mile SW and 0.1 [0.09] mile NE from Rock of Ages. Fisherman Reef, 5.5 [4.8] miles SW of Rock of Ages Light, has a least depth of 23 feet [7 m]. Five shoal spots with depths of 7 to 16 feet [2.1 to 4.9 m] are from 0.7 to 1.4 [0.6 to 1.2] miles NE of the light. Several shoals with depths of 3 to 14 feet [0.9 to 4.3 m] are within 1.2 [1] miles S and SW of the light. The southernmost spot, covered 12 feet [3.7 m], is marked on the W side by a buoy. An 11-foot [3.4-m] spot is 0.3 [0.26] mile SE of the light.
- **Grace Harbor** and **Washington Harbor**, at the SW end of Isle Royale, have good holding ground and provide protection from all winds except SW winds in Grace Harbor. Grace Harbor is enclosed on the S by Cumberland Point and on the N by a line of islands, of which Washington Island is the largest and **Grace Island** the easternmost. The islands separate Grace Harbor from the outer part of Washington Harbor. A rock, covered 2 feet [0.6 m] and marked by a buoy, is on the outer edge of the shoals off Cumberland Point. Several shoals and small islands extend W from Washington Island. The outermost are a 2-foot [0.6-m] spot 0.7 [0.6] mile SW and an 18-foot [5.5-m] spot 1.1 [1] miles WSW. A narrow 20-foot [6.1-m] channel marked by buoys leads between the E end of Washington Island and **Booth Island** N to Washington Harbor. The N side of the outer part of Washington Harbor is enclosed by Johns Island and Thompson Island. Shoal spots of 3 to 11 feet [0.9 to 3.4 m] extend 0.5 [0.4] mile SW from Johns Island, the westernmost, and a detached 13-foot [4-m] shoal is 0.2 [0.17] mile SE of the island. The entrance to Washington Harbor is 0.3 [0.26] mile wide between Washington Island and the shoals SW of Johns Island. A narrow deep channel leads between Thompson Island and Isle Royale into the harbor. A

private daybeacon marks the NE side of Thompson Island, and a private buoy marks a sunken wreck on the E side of the channel. A small islet and a 3-foot [0.9-m] shoal are 0.2 [0.17] mile N of Grace Island.

- 155 The inner part of Washington Harbor extends 3.3 [2.7] miles into the shoreline of Isle Royale. Beaver Island is near the E end of the harbor and may be passed by small craft on either side. A rock awash is off the N shore of the harbor, 0.25 [0.22] mile W of the SW end of Beaver Island. A wharf is at Windigo Ranger Station at the head of the harbor. Gasoline, diesel fuel, water, and sewage pump-out facilities are available. A small store is nearby.
- 156 **Ferries.**—A ferry service operates between Grand Portage and Windigo in Washington Harbor in the summer. The schedule is available from Superintendent, Isle Royale National Park, 87 N. Ripley Street, Houghton, MI 49931.
- 157 From Washington Harbor, the shore of Isle Royale trends N for 1.2 [1] miles to the NW corner of the island. A small island and a detached 7-foot [2.1-m] shoal are 0.25 [0.22] mile offshore about 0.6 [0.5] mile N of Thompson Island.
- of the NW corner of the island. From the cove NE for about 19 [16.5] miles to Todd Harbor, the shore is bold, clear, and deep-to except for several small detached shoals. Finlander Reef, comprising 6-foot [1.8-m] and 7-foot [2.1-m] spots, is 0.25 [0.22] mile from shore 6.3 [5.5] miles NE of McGinty Cove. A 3-foot [0.9-m] spot is close to shore 5.3 [4.6] miles NE of Finlander Reef. Gull Rocks, marked by a private marker, are 0.5 [0.4] mile from shore about 6 [5.2] miles SW of Todd Harbor. A 3-foot [0.9-m] and a 14-foot [4.3-m] spot are close inshore adjacent to Gull Rocks.

Passage Island to Port of Thunder Bay

Charts 2301, 2302

159 Upbound and downbound sailing courses recommended by the *Canadian Shipowners Association* and the *Lake Carriers Association* to provide traffic separation are shown on the charts. The courses for vessels approaching or leaving the Port of Thunder Bay pass between Blake Point and Passage Island.

Charts 2301, 2326


Passage Island to Thunder Cape

- 160 (The features and dangers around Porphyry and Edward Islands are described earlier in this chapter under "Approaches to Black Bay".)
- The three **Sand Islands** (48°20′N, 88°46′W), 4.8 miles west of Point Porphyry, are surrounded by a shallow ledge. **Skinaway Island** is the NE island of the group.

The west island is 11 feet (3.4 m) high. A **shoal spit** extends 0.3 mile to the SW.

- A chain of islands and **shoals** extends 5 miles SW from Sand Islands to Trowbridge Island. It is advisable to keep well south of these dangers in reduced visibility or at night.
- Silver Islet, 1.5 miles WSW of Sand Islands and 0.6 mile from the mainland, is 1 m high. A **shoal spit** extends to the SW. A **rock** 6 m high lies 0.2 mile ENE of the islet, and a **shoal spit** extends 0.1 mile farther ENE.
- 164 **Historical note**. A silver mine operated on Silver Islet between 1868 and 1884. The now-flooded mine shafts are a danger to trespassers.
- Maloney Shoal, 0.9 mile east of Silver Islet, has a depth of 5.1 m.
- Shangoina Island, 0.7 mile SW of Silver Islet, is 107 feet (33 m) high. Two detached **rocks** lie near the NE end of the island.
- 167 **Pyritic Island**, 0.2 mile NW of Shangoina Island, is surrounded by a **shoal ledge**.
- Ship Island lies 0.4 mile west of Shangoina Island. A shoal spit extends 0.2 mile SW of Ship Island and a small rock 1.1 m high lies 0.1 mile to the NE.
- Majestic Rock, 0.6 mile WSW of Shangoina Island, is 4 m high. Marvin Island, 0.2 mile farther SW, is surrounded by deep water except at its NE point.
- 170 **Trowbridge Island** (48°18′N, 88°52′W), 0.4 mile WSW of Marvin Island, is 93 feet (28 m) high. The south side of the island has deep water close in, but the other shores are fringed by a **shoal ledge**. A **shoal** with a depth of 1.7 m lies midway between Trowbridge and Marvin Islands.
- ****
- 171 Trowbridge Island light (1129) is near the summit of the island.
- There are four bays and one point along the mainland between Sand Islands and Thunder Cape.
- 173 **Middlebrun Bay** (48°20′N, 88°46′W), entered 0.5 mile north of Sand Islands, is shallow. **Middlebrun Island**, off the east point of the bay, is 34 feet (11 m) high and joined to the mainland shore by **shoal** water.
- A **shoal** submerged 5.2 m lies 0.3 mile north of Skinaway Island, south of Middlebrun Bay. The end of Thunder Cape touching the mainland shore NW of Sand Islands, bearing 252½°, leads south of this shoal.
- 175 **Sibley Cove** lies 1.5 miles WSW of Middlebrun Bay and has many cottages lining its shores. The beach around the cove is sand and gravel.
- Burnt Island, on the west side of Sibley Cove, is 40 feet (12 m) high and gives some shelter. More protection is given by a shallow spit extending 0.3 mile ENE from the island. The spit ends in two small **rocks**, 4 and 6 feet (1.2 and 1.8 m) high, with deep water on their NE and SE sides.

SILVER ISLET (1998)

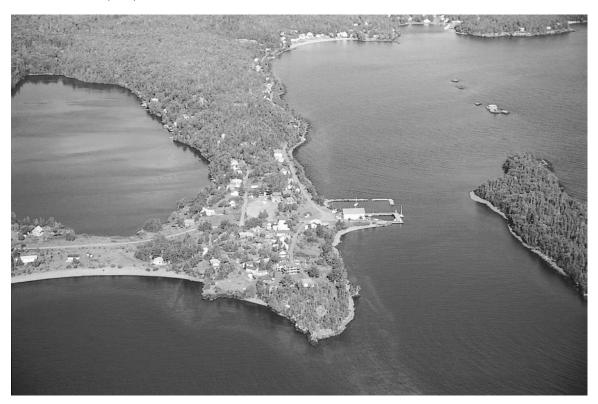

177 **Cross Rocks** are half way along the abovementioned spit. The largest **rock** is 5 m high. A **shoal** with depths of 1.5 m lies 0.15 mile SW of Burnt Island.

A **shoal ledge** extends 0.15 mile south and SW from **Church Point**, on the mainland close NW of Burnt Island.

179 The community of **Silver Islet** is on the mainland north of Burnt Island. Gasoline and supplies can be obtained in the community, and it is connected by road to the city of Thunder Bay.

The Silver Islet Public **wharf**, 0.2 mile east of Church Point, is U-shaped and has a south face 132 feet (40 m) long with a depth of 10 feet (3 m) and an east face with a depth of 8 feet (2.4 m) at its north end (1999). The west face is unsheltered and has depths of 10 feet (3 m) at the south end to dry near the boulder riprap at the shore end. There is a mooring basin between the wharf and an L-shaped boulder **breakwater** to the east. A small-craft launching **ramp** near the wharf is in disrepair. Wharf is in disrepair (2017).

181 A considerable sea is felt at the wharf in strong SW winds.

182 **Caution**. — Several **shoal** areas have been reported to lie 30 feet (9.1 m) off the east face of the wharf.

There are two **daymark beacons** (*not shown on Chart 2326*) 132 feet (40 m) apart on the Public wharf. These

beacons in line bearing 055° lead between the shoal ledge off Church Point and the 4-foot (1.2-m) shoal SW of Burnt Island.

The approach to the wharf from the east passes 0.1 mile ENE of the two small rocks on the shoal spit extending ENE of Burnt Island, then passes north of the other rocks of this group.

Anchorage with shelter from SW winds can be found near the NE end of Burnt Island.

186 **Perry Bay** lies west of Church Point with **Anorthite Islet** off its west shore. **Shoals** and **rocks** extend 0.15 mile offshore between Perry Bay and Tee Harbour, 1.5 miles to the west.

Tee Harbour (48°19′N, 88°53′W), on the east side of a T-shaped point, offers anchorage for small craft, sand and mud bottom. It is sheltered from all except east and SE winds. There is a shoal patch with a rock, 2 feet (0.6 m) high, near the middle of the harbour. The usual approach stays 0.1 mile clear east of the point when approaching Tee Harbour. The bay on the west side of the T-shaped point offers sheltered anchorage from all except west and SW winds, sand and mud bottom. The preferred approach leads 0.2 mile clear off the west point to enter the bay.

188 **Thunder Cape** (48°18′N, 88°56′W) is quite low near its SW end and rises gradually for 1 mile. It then rises steeply to a **conspicuous** hill named **The Sleeping Giant**.

The hill is 1,200 feet (366 m) high near the north end. There is a perpendicular cliff 600 feet (183 m) high on the SE side near the south end of The Sleeping Giant.



189 Thunder Cape light (1131) is on the south tip of the cape.

Thunder Bay — East Entrance

190 **Thunder Bay** is a relatively deep body of water mostly surrounded by bold shorelines, rising in places to heights of 500 to 1,200 feet (152 to 366 m). The city of Thunder Bay is on the low-lying west shore. There are few islands and shoals in the bay.

The bay is entered between Thunder Cape on the east side and Flatland Island 12.5 miles to the WSW. The entrance is divided into two passages by Pie Island.

The main entrance is between Thunder Cape and Pie Island. The west entrance between Pie Island and Flatland Island can be used in clear weather and is described later in this chapter.

Hare Island, 1.5 miles NW of *Thunder Cape light*, is 20 feet (6.1 m) high and surrounded by **Hare Island Reef**. The SW edge of the shoal area is marked by *Hare Island light buoy A2 (1132)*.

Pie Island (48°15′N, 89°05′W) is 860 feet (262 m) high at **Le Pâté** near its west end. **Turtle Head** is its east end. 195 (Pie Island is described more fully later in this chapter under "Victoria Island to Port of Thunder Bay".)

196 Caution. — Large magnetic disturbances have been reported near Thunder Cape, Pie Island and Welcome Islands, 6 miles to the NW. Mariners using magnetic compasses should exercise particular caution at night or in reduced visibility.

197 **Angus Islands**, 1.1 miles SE of Turtle Head, consist of a string of small islands and **shoals**. The largest island of the group is 48 feet (14.6 m) high.



198 Angus Island light (1130) is near the north end of the largest island.

199 A small **rock** 12 feet (3.7 m) high lies 0.1 mile NE of the largest Angus Island, and a **rock** awash lies 0.1 mile farther east.

Hamilton Islands lies 1 mile SW of Angus Island light. Cone Island is 0.4 mile south of Hamilton Islands. Craig Rock, 1 mile to the WNW, has a depth of 0.1 m. A rock 1.5 miles WSW of Cone Island has a depth of less than 1.2 m. Baker Rock, 0.7 mile farther SW, is submerged 0.9 m. Lord Stanley Rock, 0.8 mile farther SW, has a depth of 1.4 m.

202 (Welcome Islands, 6 miles north of Pie Island, are described later in this chapter under "Approaches to Port of Thunder Bay".)

Pigeon Bay to Port of Thunder Bay

Chart 2326

Pigeon Bay (48°01'N, 89°32'W) is bounded on its south side by Pigeon Point, Minnesota. Finger Point, with deep water on its north side, divides Pigeon Bay into two arms. A shoal ledge extends 0.15 mile off the north shore of the bay with Owen Island near its outer edge. Marin Island lies close east of Finger Point. A small rock lies close east of Marin Island.

204 **Caution**. — Large magnetic disturbances have been reported near Pigeon Point. Mariners using magnetic compasses should exercise particular caution at night or in reduced visibility.

Pigeon Bay is bordered by high hills offering protection from all except east winds but the holding ground is poor in both the north and south arms of the bay. The nearest good **anchorage** is in Little Trout Bay, 5 miles to the NE.

The **International Boundary** between Canada and the United States passes through the south arm of Pigeon Bay and through **Pigeon River**.

The two **Boundary Islands** lie near the middle of the south arm of Pigeon Bay. They are on a narrow **reef** that extends 0.5 mile east and west. **Acadia Rock**, 0.8 mile WSW of Boundary Islands, has 2 m of water. **Laura Grace Rock**, 0.3 mile farther WSW, is submerged 2.4 m.

Pine Bay, 1.5 miles north of Pigeon Point, offers sheltered anchorage with good holding ground for small craft but is shallow and difficult to enter. Pine Bay is entered between the east end of Naomi Island and a rock 0.1 m deep 0.1 mile to the north. Pine River is on the north side of the bay.

Big Trout Bay, 2 miles ENE of Pine Bay, is deep close to shore on all sides. Anchorage in 27.4 m can be found near the head of the bay with shelter from all except easterly winds.

Pinnacle Rock, 25 feet (7.6 m) high, and the three Cloud Islands lie 0.3 mile offshore in the entrance to Big Trout Bay. The two southern islands are separated from the north island by a deep-water passage. A rock 0.15 mile SW of the SW island has a depth of 0.7 m. A shoal 0.8 mile WSW of Cloud Islands has a least depth of 3.5 m.

Anchorage with shelter from all winds can be found in Little Trout Bay or in Cloud Bay, which opens off the north side of Little Trout Bay. Little Trout Bay has no offshore dangers and offers anchorage in 9.1 to 12.8 m, stiff mud. Cloud Bay offers anchorage in the middle of the bay in 5.5 to 9.1 m, mud. Both bays are entered north of McKellar Point. There are small-craft launching ramps

at the *Little Trout Bay Conservation Area*, on the north side of Little Trout Bay.

212 A decayed and overgrown **wharf** lies parallel to the stream inside the mouth of **Cloud River**, on the NW side of Cloud Bay. The wharf is 127 feet (39 m) long with depths of 5 feet (1.5 m) (1999). There are wire-rope rings along the wharf for mooring. The **ruins** of a launching ramp are close south of the wharf. A gravel track connects the wharf to the *International Highway*, which runs from the city of Thunder Bay to Duluth.

Off-lying islands and shoals

- 213 **Iroquois Rock** (48°05′N, 89°22′W), 1.3 miles ENE of McKellar Point, has a depth of 1.6 m; it is marked by a **buoy**.
- A chain of islands and **shoals** extends from Iroquois Rock to Angus Islands, 17.5 miles to the NE. Two marked passages, one west of Victoria Island and the other through Spar Channel, lead through this chain of islands into the more sheltered west entrance to the Port of Thunder Bay. This route is used by small craft but is suitable for use by larger vessels only in clear weather.
- Storelines with mostly deep water fringing the coast. The island is 284 feet (87 m) high near the west entrance point to **Victoria Cove. Rolland Rock** lies 0.1 mile SE of this point, with **rocks** submerged less than 0.6 m lying 0.2 mile NE and 0.1 mile south of Rolland Rock. Another **shoal rock**, 1 m deep, lies in the mouth of the cove 0.2 mile off its east entrance point. **Anchorage** in Victoria Cove is reported to be difficult because of deep water and poor holding ground. **Albert Islands** lie off the south shore of Victoria Island. A small-craft passage leads between the Albert Islands and Victoria Island.

of the island. The light is visible from 022° through east and south to 241°.

- A rock 0.1 mile WSW of the light has a depth of 0.8 m; it is marked by a **buoy**.
- The Sugarloaf, on the west end of Spar Island, touching Victoria Island, bearing 066°, just clears the north side of Iroquois Rock. The NW end of Spar Island in line with the NW end of Victoria Island, bearing 059°, leads close south of Iroquois Rock.
- Tiger Island is separated from the SW point of Victoria Island by a narrow channel with a least depth of 8 feet (2.4 m). Tiger Rock, close west of Tiger Island, is 14 feet (4.3 m) high and has deep water all around.
- 220 **Cosgrave Bay**, entered between *Victoria Island light* and Tiger Island, is deep and open to the SW. **Anchorage** for small craft can be found near the head of

the bay in depths of 15 to 25 feet (4.6 to 7.6 m), good holding ground.

Devil Island lies 0.1 mile NE of Victoria Island. The islands are separated by a channel with a least depth of 5 feet (1.5 m). A rock named **Foote Island** lies in the centre of the channel.

Jarvis Island, actually two islands 0.1 mile NE of Devil Island, has deep water all around. Jarvis Rock is separated from the NE end of the eastern island. The narrow gap is not navigable.



Jarvis Rock light (1160) is on Jarvis Rock.

- Spar Channel, between Jarvis Rock and Bradshaw Island to the east, is 0.15 mile wide. A shoal spit extends SSW from Bradshaw Island into the channel. Spar Channel is the passage generally used from the Port of Thunder Bay to Washington Harbor on Isle Royale. There is deeper water from mid-channel to the west side through Spar Channel.
- Spar Island, close NE of Bradshaw Island, is 281 feet (86 m) high at its bold north point. The Sugarloaf is a bluff 225 feet (69 m) high at the SW end of Spar Island. Depths of 128 to 137 m are found close to shore along the south and SE coasts of the island. Spar Reef, 0.1 mile offshore on the west side of the island, is awash.
- Anchorage for small craft may be found in the cove on the NW side of Spar Island in depths of 1.8 to 4.6 m.
- A chain of small islands and **reefs** extends from the NE end of Spar Island 1.8 miles NE to Thompson Island. The named islands and reefs in this chain are: **Swan Rock**, **Arabian Rock**, **Harty Island**, **Robertson Islands**, **Moonshine Island**, **Prefontaine Island**, **Eva Islands**, **Slipper Island** and **Cohen Rock**. There are many other reefs.
- Thompson Island, 3.5 miles long, rises steeply from the lake bottom to 276 feet (84 m) high in its SW part. Anderson Island is separated from the NE end of Thompson Island by a deep passage 300 feet (91 m) wide.
- A string of islands and reefs, including **Magee Island** and **Hawken Island**, lie between Anderson Island and **South McKellar (McKellar) Island**, 0.5 mile to the NE.
- 230 (The off-lying reefs and islands south of Pie Island are described earlier in this chapter under "Thunder Bay East Entrance".)

Victoria Island to Port of Thunder Bay

Caldwell Point (48°06′N, 89°21′W), 1 mile NE of *Victoria Island light*, is a low gravel point covered with grass. Caldwell Shoal, 0.2 mile SSW of the point, has a depth of 1.7 m and is marked by a **buoy**.

Crystal Bay is close west of Caldwell Point. Caldwell Island and Sucker Island, in the entrance to Crystal Bay, offer little protection from the south.

The coast is bold between Caldwell Point and **Jarvis Point**, 1.3 miles to the NE.

Jarvis Bay, north of Jarvis Point, is free from obstructions but is open to the east. Jarvis River enters the west end of the bay. Prince Bay, on the north side of Jarvis Bay, is shallow. Beaver Island lies in the entrance to Prince Bay.

Mink Point $(48^{\circ}08'N, 89^{\circ}18'W)$, 1.9 miles NNE of

Jarvis Point, rises to a height of 480 feet (146 m) 0.4 mile west from the end of the point.



236 *Mink Point light (1159)* is at the east tip of the point.

Mink Island is separated from Mink Point by a passage 0.3 mile wide. The deepest water is found near the point. The island is 1.4 miles long and is divided in two by a passage 100 feet (30 m) wide and 3 feet (0.9 m) deep (1980), 0.5 mile NE of the SW end of the island. The north part of the island is 266 feet (81 m) high. A rock 0.3 mile NE of Mink Island is awash.

Sister Islands, 0.7 mile NE of Mink Island, are separated by shallow water. A **rock** submerged less than 6 feet (1.8 m) lies close to the NE. **Sly Rock**, 0.3 mile NE of Sister Islands, has a depth of 0.3 m.

239 **Mink Bay** lies north of Mink Point. **Nisbet Island** is in the NW corner of the bay and **Muskrat Island** is in the south part.

Sturgeon Point, 2.3 miles NNE of Mink Point, is 505 feet (154 m) high and bold. **Sturgeon Island** is 0.1 mile NE of the point and is small.

Small craft can find **anchorage** with good protection from all winds in **Sturgeon Bay**, mud. The entrance to the bay is 0.1 mile wide and has depths of 7 feet (2.1 m) (1980). Larger vessels can anchor off the entrance to Sturgeon Bay in 9.1 to 11 m.

Zealand Spit, has a depth of 1.2 m and extends 0.3 mile offshore on the north side of the entrance to Sturgeon Bay.

A **shoal spit** with several **rocks**, two of them being 9 and 2 feet (2.7 and 0.6 m) high, extends 0.5 mile ENE of the SE point of **Flatland Island**. **Campbell Island** lies on the end of this spit.

Alexander Reef, 0.4 mile SE of Flatland Island, is marked by a **buov**.

Pie Island is 860 feet (262 m) high at **Le Pâté** near its west end. An old light-structure, almost obscured by trees (1980), is on the west point 0.2 mile north of the present light.

246 Pie Island light (1158) is on the west end of the island.

Steamboat Island, 1.3 miles SSW of *Pie Island light*, is 16 feet (4.9 m) high. A rock, (not shown on Chart

2326) submerged 5 feet (1.5 m), is close SW of the island. **Deadman Island**, 0.3 mile WSW of Steamboat Island, is 11 feet (3.4 m) high. It is surrounded by a **shoal ledge** on all but its north side.

248 **Dawson Bay** is on the south side of Pie Island between **Keefer Point** and **Greenstone Point**. **Anchorage** in 11 m, sand, can be found near the head of the bay. **Anchorage** can be found 0.7 mile off the north shore of Pie Island, with fair shelter from south winds in 9.1 to 11 m, clay.

249 **Caution**. — Large magnetic disturbances have been reported near Pie Island and Welcome Islands, 6 miles to the north. Mariners using magnetic compasses should exercise particular caution at night or in reduced visibility.

The main passage, east of Flatland Island between Campbell and Deadman Islands, is 0.8 mile wide.

Flatland Reef extends 1 mile NNE of Flatland Island and has a depth of 1.3 m.

The south shoulder of The Sleeping Giant touching Pie Island, bearing 071°, leads north of Flatland Reef.

Flatland Harbour, west of Flatland Island, is protected on its south side by Singleton Island. The entrance between Wiley Point and Singleton Island is shallow but possible for small craft. There are shoals on both sides of the passage between Singleton Island and Flatland Island. Rowan Reef, 0.2 mile north of the east end of Singleton Island, makes this passage even more difficult to navigate. The best entrance to Flatland Harbour is from the north between Russell Point and Birch Island.

Anchorage with good shelter can be found in Flatland Harbour south of Birch Island in 7.3 m, mud. Two wharves on the mainland shore on the NW side of Flatland Harbour are in ruins and mostly submerged. Five wrecked barges protrude above the water around the north wharf and there are three sunken barges near the south wharf (1980).

Charts 2301, 2326

Grand Point lies 0.7 mile NE of McNab Point. Grand Reef, 0.3 mile east of Grand Point, has a depth of 0.9 m and is marked by a buoy.

Chart 2301

Approaches to Port of Thunder Bay

Welcome Islands (48°22'N, 89°08'W) lie in the approach to the Port of Thunder Bay. A **shoal spit** extends 0.7 mile south of the west island. Two small islands lie midway along this spit and **Welcome Shoal** is near the south end.



259 Welcome Island light (1133) is near the north end of the east island.

Schwitzer Shoal, 3 miles ENE of Welcome Island *light*, has a depth of 5.4 m.

Sailing courses recommended by the *Canadian Shipowners Association* and the *Lake Carriers Association* for approaching and leaving the Port of Thunder Bay are shown on the charts. Vessels bound for the north part of the harbour or the Kaministiquia River pass north of Welcome Islands, those bound for the Mission River entrance pass south of Welcome Islands.

The route (described in the previous section) leading south from the Port of Thunder Bay and through the channel west of Pie Island is used by small craft. It is a shorter and more sheltered passage for craft bound for Duluth but is suitable only in clear weather.

Thunder Bay Airport is SW of Thunder Bay. An aeronautical rotating **light** here may be obscured from the lake by city lights. An aeromarine **radiobeacon** (48°20′48″N, 89°26′01″W) broadcasts on 332 kHz, identification Morse "QT" (——•——).

The following features are prominent **landmarks**.

South of Kaministiquia River, **Mount McKay** (48°21′N, 89°17′W) has radio and microwave **towers** near its summit. These towers have air obstruction **lights**.

All the **grain elevators** in the north part of the harbour are prominent.

A microwave **tower** 2.5 miles north of **Melancon Point** $(48^{\circ}29'N, 89^{\circ}06'W)$ is 1,704 feet (519 m) high and has air obstruction **lights**.

Charts 2314, 2326

Sugarloaf Hill, 0.5 mile NE of Melancon Point, is a prominent hill 254 feet (77 m) high.

There are several **shoals** west of Welcome Islands in the approaches to Kaministiquia, McKellar and Mission Rivers. These are best seen on the chart. Some are marked by **buoys**. The named shoals in this group are **Burke Shoal**, south of Mission River entrance; **Mutton Shoal**, south of McKellar River entrance; and **Old Dumping Ground Shoal**, north of McKellar River entrance.

Port of Thunder Bay

The harbour at Thunder Bay is defined by the *Canada Marine Act* as the *Port of Thunder Bay*; its limits are shown on the chart. The harbour is administered by the *Thunder Bay Port Authority*.

Vessels manoeuvring or otherwise under way in the Port of Thunder Bay, and also while berthed alongside or at anchor, are subject to the *Thunder Bay Port Authority* Standard Operating Procedures. A copy can be obtained from the *Thunder Bay Port Authority*, P.O. Box 2266, Thunder Bay, Ontario P7B 5E8.

Thunder Bay must contact the Sarnia Marine Communications and Traffic Services (MCTS) Centre, call sign VBE, when abeam of Welcome Islands and also when shifting berths in the harbour or departing. This MCTS Centre provides a complete information service to mariners (Consult Radio Aids to Marine Navigation (Atlantic, St. Lawrence, Great Lakes, Lake Winnipeg and Eastern Arctic) for more information).

A marine emergency plan is in effect for the Port of Thunder Bay. Details are available from the harbour master.

There are specific regulations for the carriage and handling of explosives and dangerous goods, as well as rules to be observed in the prevention of fire. In the event of fire occurring at a dock or on board a vessel, other than a vessel that is under way, the vessel shall give *five blasts of from four to six seconds duration* with its whistle or siren as an alarm to indicate the fire. This signal shall be repeated at intervals and shall be used in addition to, but not instead of, other means of reporting a fire.

276 Caution. — Thunder Bay Port Authority advises mariners to exercise caution in the use of bow thrusters when entering, leaving, or when alongside any elevator slip or dock in the Port of Thunder Bay. Such thrusters cause water turbulence that can damage sheet piling. The churning action can also reduce berms at the toe of sheet piling and cause fill to be washed from between piles. It also shifts lake bottom material in the slips resulting in high spots that can be the subject of vessel complaints. Masters are requested not to use bow thrusters in the elevator slips except in an emergency. Certain berths prohibit the use of bow thrusters entirely.

Navigation opens about April 1 and icebreakers enable navigation to late December or early January. The average maximum thickness of winter shore-fast **ice** at Thunder Bay is 74 cm, with a record thickness of 100 cm (1963).

Large vessels generally employ tugs in the rivers, and in the main north section of the harbour when wind conditions make it advisable.

There are **anchorage areas** within the limits of the harbour, outside the breakwalls. They are indicated on the chart. Vessels are instructed to anchor well clear of approaches to the harbour entrances. The holding ground is reported to be good.

A submerged water intake **pipeline** extends 0.4 mile in an ESE direction from Bare Point. Another water intake **pipeline** extends 0.4 mile in a SE direction from a position on shore 1.3 miles NNE of Bare Point.

A **submarine cable** crosses from the McKellar River entrance to *Welcome Island light*.

PORT OF THUNDER BAY (1998)



282 (General information on the city and harbour facilities is given later in this chapter.)

The buildings of *Provincial Paper Inc.* are on **Bare Point** $(48^{\circ}27'N, 89^{\circ}10'W)$. The most prominent building on the property is a silver-coloured **water tower**.

The buildings of *Thunder Bay Packaging Inc.*, 1.1 miles NNE of Bare Point, are **conspicuous**. The mill has a wharf but this is seldom used. There was only one vessel in 1998.

285 **Caution**. — The bottom of the inshore area west of the mill is **foul** with sunken logs and other **obstructions**.

The northern part of the Port of Thunder Bay extends from Bare Point to the north side of the mouth of Kaministiquia River (described in the next section). This area is protected by rubble-mound breakwaters. There are three entrances through these breakwaters: North Entrance, 0.8 mile SW of Bare Point; Main Entrance, 1.9 miles SW of Bare Point; and South Entrance, 3.1 miles SSW of Bare Point.

287 Thunder Bay North Entrance North light (1157) is at the SW end of the north breakwater. Thunder Bay North Entrance South light (1156) is on a

building near the NE end of the south breakwater; the light-structure is **floodlit**.

Thunder Bay Main light (1152) is on a building at the SW end of the breakwater on the north side of the Main Entrance; the light-structure is **floodlit**. There is a user-activated **foghorn** at the light.


289 Thunder Bay Central Entrance South light (1151) is on the breakwater at the south side of the main entrance.

The South Entrance is marked by two lights: *Thunder Bay South Entrance North light (1150)* and *Thunder Bay South Entrance South light (1150.3)*. The latter light is on a small building; the structure is **floodlit**.

Buoys and light buoys in the area are best seen on the chart.

292 **Caution**. — Small craft in the section of the harbour north of *Thunder Bay Main light* should be particularly alert for float-equipped aircraft landing and taking off, generally in NE and SW directions. Seaplane operating areas are marked on the chart.

293 **Caution**. — A line of pilings extends offshore from the abandoned *Pool 2* facility, 0.3 mile east of McVicar Creek. The piles are marked by a private buoy. These piles are submerged at higher water levels and are especially dangerous at night.



Real-time water level information for the Port of Thunder Bay is available from the *Canadian Hydrographic Service Automated Water Level Gauge*, telephone number (807) 344-3141. (*More information on water levels is given in Sailing Directions booklet CEN 300 — General information, Great Lakes.*)

A submarine power cable is laid from the *North Entrance South light* close to and parallel with the west face of the breakwater to the *Main Entrance North light* and thence NW to the mainland 0.1 mile east of McVicar Creek, at the north side of the *Department of National Defence* property. Another submarine power cable runs from the *South Entrance South light* close to and parallel with the west face of the breakwater to its south end and thence WSW to the mainland.

The major **facilities** in the Port of Thunder Bay are listed on the chart.

298 Caution. — There is a concrete and steel cylindrical **knuckle** at the SE corner of the wharf at *The United Grain Growers Elevator* "A". The structure projects beyond the face of the wharf and makes berthing difficult. East winds can make berthing hazardous.

299 **Current River**, with its mouth 0.8 mile WSW of Bare Point, and **McVicar Creek**, 1.4 miles farther SW, are swift flowing and unnavigable.

300 A Public **wharf** and launching **ramp** on the north shore at the mouth of Current River are operated by a wharfinger. A private **unlit range**, in line bearing 003°, leads to this wharf.

the Current River wharf is very narrow and surrounded by **rocky shoals**. Considerable **current** flows across the channel and makes steering on the line of the range difficult.

302 An L-shaped boulder **breakwater** south of the mouth of McVicar Creek is 2 m high. This structure is for wildlife habitat protection.

The **piers** and **dolphins** 0.7 mile SSW of McVicar Creek are used by a commercial towing operation.

The mouths of **McIntyre River** and **Neebing River** have been filled in as part of the Neebing-McIntyre floodway system. A single outlet for the two rivers was constructed 0.3 mile north of the mouth of Kaministiquia River. Power-driven vessels are prohibited on the floodway system.

Southern part of Port of Thunder Bay

The southern part of the Port of Thunder Bay includes Kaministiquia River and McKellar and Mission Rivers. The area between McKellar River and Mission River is known as **Mission Marshes**.

Turning Basin, 5 miles from the entrance. The area 2 miles from the entrance, at the junction with Mission River, is known as **Kam Turning Basin**. The river entrance is known locally as **Kam Entrance**.

307 **Caution**. — This area is subject to silting; Westfort Turning Basin and Mission River are especially affected.

308 **Caution**. — The **current** in the navigable section of the Kaministiquia River is controlled by a hydro-electric dam farther upstream. The current is variable and at times it reverses.

309 Kaministiquia River Entrance light (1144) is on a small building on the south end of the offshore breakwater close north of the river entrance. The structure is **floodlit**.

310 Kaministiquia River Entrance Inner light (1144.3) is on the north side of the river on an old elevator wharf.

311 Kaministiquia River Entrance South light (1144.4) is on the north end of Wharf No. 25. This light is privately maintained

312 *Kaministiquia River light (1145)* is on the south bank of the river 2.5 miles from the river entrance.

313 Kaministiquia River Water Mains Crossing North light (1146), on the north bank of the river0.1 mile farther NW, is visible from 285° through north and east to 105°.

314 Kaministiquia River Water Mains Crossing South light (1147) is on the south bank of the river 0.1 mile SW of the north light.

There is a road **bridge** across the river 0.4 mile from the entrance. The clearance south of the centre abutment is 8.4 m; north of the abutment, the clearance is 5.3 m.

Jacknife Bridge, a bascule **bridge** 1.9 miles from the river entrance, connects the west end of **Mission Island** to the mainland. The channel through the bridge is marked on each side by white **lights**. The clearance under the bridge when closed is 3.5 m. **Lights** on the bridge show green when the bridge is open and red when closed. The signal for opening the bridge is *two long and two short blasts*. A flashing red light signifies that the bridge is being closed to road traffic.

316 **Radio calls.** — Vessels requiring opening of *Jacknife Bridge* must contact *Sarnia MCTS Centre*, call sign *VBE*, at least two hours in advance and then contact the bridge personnel directly, call sign *Jacknife Bridge*, at least 30 minutes before arrival at the bridge. *Jacknife Bridge* guards VHF Channel 16 and works on Channel 14.

KAMINISTIQUIA RIVER (1998)



317 The Canadian National Railway Swing Bridge 3.8 miles from the river entrance, known locally as James Street Swing Bridge, has a channel width of 30 m. The dredged channel through the bridge passes south of the central abutment and is marked on each side by white **lights**. The clearance under the bridge when closed is 8.6 m. **Lights** on the bridge show green when the bridge is open and red when closed. The signal for opening the bridge is two long and two short blasts. If a railway train is approaching and the bridge cannot be opened to a vessel, the Sarnia MCTS Centre is notified and the **red light** flashes five times as a warning signal.

318 **Radio call.** — Vessels requiring opening of the *Canadian National Railway Swing Bridge* must contact *Sarnia MCTS Centre*, call sign *VBE*, at least two hours in advance.

319 **Caution**. — Both **bridges** normally close in the second half of December for maintenance. Vessels that need a late-season passage through either bridge should contact the Harbourmaster.

An **overhead power cable** that crosses the Kaministiquia River 0.4 mile from the entrance has a clearance of 41 m. The supporting **towers** have white strobe **lights**. An **overhead power cable** that crosses the river 0.2 mile SW of Kam Turning Basin has a clearance of 41 m. An **overhead**

power cable that crosses Kaministiquia River 0.1 mile west of the swing bridge has a clearance of 49 m.

A submarine power cable crosses the Kaministiquia River 0.6 mile downstream of the *Jacknife Bridge*, just downstream of *Heritage Waterfront Park*. Submarine cables also cross the river on both sides of the *Jacknife Bridge*.

Two **water mains** cross the river at the turn 0.7 mile SW of the *Jacknife Bridge*. They are marked on the north and south shores by **lights**.

Power and telephone **submarine cables** and **water mains** cross the river on both sides of the railway swing bridge and a **submerged gas pipeline** crosses the river close west of this bridge.

The Thunder Bay Port Authority Standard Operating Procedures prescribe that no vessel shall turn under its own power in the immediate vicinity of any bridge crossing Kaministiquia River. No vessel exceeding 200 gross tons shall turn in Kaministiquia River except at Westfort Turning Basin or at Kam Turning Basin. Permission is required from the harbour master for turning in other locations on the river.

The major **facilities** in the Port of Thunder Bay are listed on the chart. Other wharves and features along the north side of the Kaministiquia River are listed below.



The **wharf** on the north side at the entrance to the river is 189 m long; it is in poor condition (1999).

- There are several derelict **berths** west of the entrance, extending a distance of 1.2 miles. These berths are in ruins and have no facilities (1999).
- A **wharf** and shed 0.3 mile SSW of *Jacknife Bridge* are in poor condition (1999).
- The **wharf** 0.4 mile SSW of *Jacknife Bridge* is 283 m long; it is used for lay-up of ships.
- McKellar River is 1.3 miles long and separates McKellar Island from Mission Island. Due to silting, the *Thunder Bay Port Authority* considers McKellar River to be suitable only for small craft.
- 331 **Caution**. The **current** in the McKellar River is controlled by a hydroelectric dam on the Kaministiquia River. The current varies and its direction frequently reverses.
- 332 **Caution**. The entrance channel and river are subject to silting. There is significant silting and shoaling near the mouth of the river.
- A bascule **bridge** at the west end of McKellar River connects McKellar Island to Mission Island. The channel through the bridge is marked on each side by white **lights**. The clearance under the bridge when closed is 4.1 m. **Lights** on the bridge show green when the bridge is open and red when closed. This bridge is manned on 24 hours notice.
- Radio call. Vessels requiring opening of this bridge must contact *Sarnia MCTS Centre*, call sign *VBE*, at least 24 hours in advance.
- 335 **Caution**. This bridge has not been opened in several years (1999).
- An **overhead power cable** with a clearance of 42 m crosses McKellar River 0.65 mile east of the bascule bridge.

 A **submerged pipeline** crosses the river 0.67 mile east of the bascule bridge. Two **submarine power cables** cross the river near the bascule bridge, and a third **submerged power cable** runs parallel to the south bank and along the south side of the entrance channel.
- Mission River (48°21′N, 89°12′W) can be used as an access channel to Kaministiquia River. The river is 1.7 miles long and the entrance channel to the river is 1.2 miles long. The entrance is known as Mission River Entrance. A breakwater 0.7 mile long protects the south side of the entrance channel. Mission River Turning Basin is inside the mouth of the river.
- 339 **Caution**. The entrance channel and river are subject to silting.
- River is controlled by a hydro-electric dam on Kaministiquia River. The current varies and its direction frequently reverses.
- 341 **Caution**. Reverse currents and siltation can make **berthing** at the *Petro-Canada* wharf hazardous.

- No vessel exceeding 200 gross tons shall turn in Mission River except at Mission River Turning Basin or at Kam Turning Basin.
- 343 *Mission Channel Entrance light (1136)* is on top of a small white building at the east corner of the breakwater; the structure is **floodlit**.
- 344 *Mission River Entrance Breakwater light (1138)* is on the north corner of the breakwater.
- There are two privately maintained **lights**, with elevations of 9 feet (2.7 m), one on the east side and one on the west side of the *Ontario Hydro Thunder Bay Generating Station* wharf.
- Mission Channel range lights (1139, 1140) are on the west side of the mouth of Mission River. The lights in line lead through the dredged entrance channel.
- 347 **Caution**. East or NE winds create a confused sea near the breakwater. Small craft should use the Kaministiquia River entrance at such times.
- An **overhead power cable** with a clearance of 44 m and a telephone **submarine cable** cross the Mission River 0.7 mile WNW of the inner end of the breakwater. Two **submerged water mains** and a telephone **submarine cable** cross the river 0.25 mile farther NW. There are lighted warning signs near the crossings.

Facilities in Thunder Bay

- Prior to 1970 this urban area was two cities: the city of **Port Arthur** was the northern part and the city of **Fort William** the southern part. The two cities amalgamated and the **City of Thunder Bay** was incorporated in 1970. The population in 1996 was 113,662.
- In 1999 there were nine grain elevators operating in the city. One more was being refurbished. Other industries include newsprint paper mills, shipbuilding, marine and general engineering shops, a foundry, sawmills and woodworking factories, bus and aircraft factories, a brewery, and brick and clay works.
- 351 A Canadian Coast Guard search and rescue lifeboat is based at Thunder Bay from the end of April to the beginning of December each year, though these dates are subject to change (see information on search and rescue in Sailing Directions booklet CEN 300 General Information, Great Lakes).
- 352 There is a medical evacuation helicopter operated by the *Ontario Ministry of Health* at *Thunder Bay Airport*.
- Thunder Bay is a **Customs** vessel reporting station for pleasure craft and a vessel clearing station for commercial vessels.
- Towing services are available.



Many of the berths in the Port of Thunder Bay have a variety of cargo-handling gear and storage

MISSION RIVER (1998)



facilities. Floating and mobile land cranes with capacities of 9 to 126 tonnes are available from *Thunder Bay Improvements*.

There are scheduled freight, express and intermodal rail services. *Thunder Bay Airport* is operated by the *Thunder Bay Airport Authority*. *Air Canada*, *Bearskin Airlines* and *Messabi Airlines* operate scheduled air services. *Messabi Airlines* is a feeder for *Northwest Airlines*. Scheduled bus

Firms in Thunder Bay offer a full range of ship repairs, with land and water transportation.

services connect Thunder Bay to other major cities.

The *PASCOL Engineering* fitting-out berth is 0.5 mile west of Bare Point. It has several mobile cranes with lifting capacities of 9 to 72 tonnes.

359 Thunder Bay Marine Services has divers for underwater inspection and repair. The company offers land and water transportation and lighterage services.

360 Servicing and spare parts for most pleasure craft are available from firms in the city.

PASCOL Engineering dry dock, close west of the fitting-out berth, is 228 m long with a floor width of 23.8 m and a depth over the sill of 4.9 m. A channel to the dry dock has depths of 5.5 m; a channel to the fitting-out berth has depths of 6.4 m.

Vessel inspection and surveying services are available. Navigation electronics repair and compass adjusting are carried out. Garbage is removed either by truck or barge. Oily waste is removed either by tank truck or in barrels. There is no barging of oily waste.

Fumigation services are available; inspection is by the Canadian Food Inspection Agency.

Oil companies supply bunker fuel by tanker truck. Fresh water is available from shore connections at *Keefer Terminal*. There is no barging of fuels or water in the harbour. Fresh provisions and all kinds of marine supplies are available in the city.

365 Prince Arthur's Landing Marina is a municipal facility. There is a restaurant nearby. Vessels 20 m in length can be accommodated; larger vessels are requested to contact Prince Arthur's Landing Marina 48 hours in advance to make arrangements.

366 *McKellar Marine Centre*, on the south side of McKellar River 1 mile inside the entrance, is a small-craft repair facility offering hull repairs and hoist or crane haul out.
367 *Thunder Bay Yacht Club*, on the north side of Mission River 0.6 mile from the entrance, has no public facilities.

There is a **breakwater** and boardwalk at **Chippewa Park** on the north side of **Whiskyjack Point** (48°20′N, 89°12′W).

369 Caution. — The outer tip of the 236-m long dog-leg breakwater-boardwalk structure has depths of less than 1.2 m. There are no mooring cleats and the lagoon to the west is very shallow. The east side of the shore end of the breakwater-boardwalk is lined with **boulders**; the west side of the shore end is dry.

Retaining walls close north of Chippewa Park enclose a hazardous-waste reclamation area.

North and east shores of Thunder Bay

Charts 2301, 2326

There is deep water close south of **Wild Goose Point** (48°29′N, 89°04′W) and a shallow bay to the NE. **Papoose Islands** lie 0.9 mile east of Wild Goose Point. The larger SE island is 10 feet (3 m) high.

Mary Harbour, 2.5 miles ENE of Wild Goose Point, offers good anchorage in 7.7 m, clay. Mary Island is 25 feet (7.6 m) high and gives protection from SE winds. Silver Harbour is on the mainland shore inside the NE part of Mary Island. Silver Harbour Conservation Area has a small harbour with three wharves and a launching ramp, protected by a lightly-wooded breakwater.

Lefebvre Island and Bacon Island lie in the entrance to Mackenzie Bay, 1.4 miles ENE of Mary Island. Mackenzie River, which is unnavigable, enters the head of the bay over a shallow ledge. A railway bridge with an overhead clearance of 12 feet (3.7 m) crosses the mouth of the river. Conmee Point is the bold eastern entrance point to Mackenzie Bay.

Asubmarine power cable crosses from the south side of Bacon Island in a NE direction to the NW side of Conmee Point.

Buck Islands lies 0.4 mile east of Conmee Point. There is a rock dry 0.4 m close west of the island and a shoal spit, with a small islet and a rock dry 0.7 m, extends 0.3 mile ENE.

Amethyst Bay, east of Conmee Point, is an open bight with several islands and **shoals**. Cliffs form the coast north of Conmee Point and a high ridge parallels the shore, passing close to the head of the bay. The two **Kent Islands** lie in the NE part of Amethyst Bay. Kent Island is 11 feet (3.4 m) high. **Palette Island** is 0.2 mile to the north.

A **submarine power cable** crosses from the NE end of Palette Island to the mainland.

Amethyst Bay. It is protected to the south by Lambert Island, which is connected to Perry Point by a bridge (not shown on Chart 2326) with an overhead clearance of 7 feet (2.1 m). The entrance to the harbour is between Lambert Island and the Kent Islands. The harbour is 4.2 m deep and has 3.6 m of water in the entrance. This harbour offers small vessels perfect sheltered anchorage from all winds, but local knowledge is required.

379 A Public **wharf** at the head of the harbour is 267 feet (81 m) long and 12 feet (3.7 m) wide, with depths alongside of 5 feet (1.5 m). This wharf is leased to *Amethyst Harbour Campers Association*.

Caribou Island $(48^{\circ}31'N, 88^{\circ}51'W)$ is bold at its west end. **Temple Rock**, 0.4 mile west of the island, has a depth of 0.5 m and is marked by a **buoy**.

Anchorage with fair protection can be found off the north side of the east part of Caribou Island in 8.1 m, clay.

Point, 2 miles north of the east end of Caribou Island.

Honeymoon Island is 0.4 mile WSW of Knobel Point.

Chipman Rock, 0.4 mile farther SW, has a depth of 2.2 m.

The head of the bay east of Knobel Point is comparatively low and fronted by a **shoal ledge** 0.2 mile wide. **Anchorage** can be found 0.5 mile offshore near the head of the bay in 12.6 m, mud.

The east shore of Thunder Bay is bold with unobstructed shorelines.

Anchorages along the east shore with shelter from east winds can be found off Clavet Bay SSE of Clavet Point in 11 m, sand, and in Hoorigan Bay behind Hoorigan Point in 11 m, clay.

There is reported to be a **daymark** with black and white horizontal bands on the islet close off Hoorigan Point.

Sawyer Bay, NE of The Sleeping Giant, is fringed by a shallow ledge 0.1 mile wide; the land at the head of the bay is low. **Anchorage** with protection from south and east winds can be found in the bay in 5.2 m, clay.

Sail Plan

Adapted from Transport Canada Publication TP 511E.

Fill out a sail plan for every boating trip you take and file it with a responsible person. Upon arrival at your destination, be sure to close (or deactivate) the sail plan. Forgetting to do so can result in an unwarranted search for you.

Sail Plan	
Owner Information	
Name:	
Address:	
Telephone Number:	Emergency Contact Number:
Boat Information	
Boat Name:	Licence or
	Registration Number:
	Length:Type:
	Cabin:
Engine Type:	Distinguishing Features:
Communications	
Radio Channels Monitored:	HF: VHF: MF:
	lumber:
Satellite or Cellular Telephone Number: Safety Equipment on Board	
Satellite or Cellular Telephone Number: Safety Equipment on Board	
Safety Equipment on Board Lifejackets and PFD's (include number): _ Liferafts (include type and colour):	Dinghy or Small Boat (include colour):
Satellite or Cellular Telephone Number: Safety Equipment on Board Lifejackets and PFD's (include number): Liferafts (include type and colour): Flares (include number and type):	
Safety Equipment on Board Lifejackets and PFD's (include number): Liferafts (include type and colour): Flares (include number and type):	Dinghy or Small Boat (include colour):
Safety Equipment on Board Lifejackets and PFD's (include number): _ Liferafts (include type and colour): Flares (include number and type): Other Safety Equipment: Trip Details — Update These Details	Dinghy or Small Boat (include colour): ails Every Trip
Safety Equipment on Board Lifejackets and PFD's (include number): Liferafts (include type and colour): Flares (include number and type): Other Safety Equipment: Trip Details — Update These Details Date of Departure:	Dinghy or Small Boat (include colour): ails Every Trip Time of Departure:
Safety Equipment on Board Lifejackets and PFD's (include number): Liferafts (include type and colour): Flares (include number and type): Other Safety Equipment: Trip Details — Update These Details Date of Departure:	Dinghy or Small Boat (include colour): ails Every Trip _ Time of Departure: Heading To:
Safety Equipment on Board Lifejackets and PFD's (include number): _ Liferafts (include type and colour): Flares (include number and type): Other Safety Equipment: Trip Details — Update These Details of Departure: Leaving From: Proposed Route:	Dinghy or Small Boat (include colour): ails Every Trip Time of Departure: Heading To:

The responsible person should contact the nearest Joint Rescue Coordination Centre (JRCC) or Maritime Rescue Sub-Centre (MRSC) if the vessel becomes overdue.

Act smart and call early in case of emergency. The sooner you call, the sooner help will arrive.

JRCC Victoria (British Columbia and Yukon) 1-800-567-5111

+1-250-413-8933 (Satellite, Local or out of area)

727 (Cellular)

+1-250-413-8932 (fax)

jrccvictoria@sarnet.dnd.ca (Email)

JRCC Trenton (Great Lakes and Arctic) 1-800-267-7270

+1-613-965-3870 (Satellite, Local or Out of Area)

+1-613-965-7279 (fax)

jrcctrenton@sarnet.dnd.ca (Email)

MRSC Québec (Quebec Region) 1-800-463-4393

+1-418-648-3599 (Satellite, Local or out of area)

+1-418-648-3614 (fax)

mrscqbc@dfo-mpo.gc.ca (Email)

JRCC Halifax (Maritimes Region) 1-800-565-1582

+1-902-427-8200 (Satellite, Local or out of area)

+1-902-427-2114 (fax)

<u>ircchalifax@sarnet.dnd.ca</u> (Email)

MRSC St. John's (Newfoundland and Labrador Region) 1-800-563-2444

+1-709-772-5151 (Satellite, Local or out of area)

+1-709-772-2224 (fax)

mrscsj@sarnet.dnd.ca (Email)

MCTS Sail Plan Service

Marine Communications and Traffic Services Centres provide a sail plan processing and alerting service. Mariners are encouraged to file Sail Plans with a responsible person. In circumstances where this is not possible, Sail Plans may be filed with any MCTS Centre by telephone or marine radio only. Should a vessel on a Sail Plan fail to arrive at its destination as expected, procedures will be initiated which may escalate to a full search and rescue effort. Participation in this program is voluntary. See Canadian Radio Aids to Marine Navigation.

Table of marine facilities *



Groceries, ice, snack bar HoistIcranelmarine railway Telephone Name and location

CHAPTER 1

519-332-6779	8	350		EW	GD	SR		1.3t				TS	ı					Р		
519-336-5576	8	53	4	EW		S		4.4t				TS						Р	68	
519-786-4700																		PC		
519-786-6841	4	60		w	G	R						т	IS		В			Р	68	
519-243-3636	6	54	8	EW	G	SR	М	17.5t		В		TSL	IS	RD	В			Р	68	
519-243-3900	4	2					МН	9t												
519-243-2701	5	30	6	EW		R	МН					TS	1		M			Р	68	
519-243-2322	5	52	8	EW		SR	МН	14t				TS			М				68	
519-243-3433	4	60	5	EW	G	SR				В		TS	IS					Р		
519-243-2354	5-9	96	5	EW	G	R						TS	ı					Р	68	
519-238-2000	7	70	54	EW	GD	SR						TSL	-1					Р	68	
519-238-2421	4	44		EW								TS	1					Р	68	
519-238-2887							МН	9t							М					
519-238-2391	6	12	12	EW			МН	45t							М				68	
519-238-2508																				
519-565-2149	8	250	75	EW	GD	SR						TSL	GIS	R				Р	68	
519-565-2411							МН	18t							М					
519-565-2110	7-8	100	15	EW		R	М			ВМ		TS	ı		М			Р	68	
519-565-2233	8	65	10	EW	GD	SR	МН	9t				TSL	1		М			PC	68	
519-524-4409	8	124	30	EW		R	МН	13t				TSL	GI		вт		•	Р	68	
519-524-4409	10	160	50	EW	GD	SR	МН	22t				TSL	GI					PC	68	
519-524-8813	8	28	8	EW		SR						TS	IS	RD	В			Р	14	
519-524-5361							М													
519-396-4336	7	154	30	EW	GD	SR				М		TS	1		М			Р	68	
519-832-6535	8-12	234	30	EW	GD	SR					٠	TS	GI	R				Р	68	
519-389-4232							МН								м					
	519-336-5576 519-786-4700 519-786-6841 519-243-3636 519-243-3900 519-243-2701 519-243-2322 519-243-3433 519-243-2354 519-238-2000 519-238-2421 519-238-2887 519-238-2508 519-565-2110 519-565-2110 519-565-2233 519-524-4409 519-524-4409 519-524-8813 519-524-5361 519-396-4336 519-832-6535	519-336-5576 8 519-786-4700 4 519-786-6841 4 519-243-3636 6 519-243-3900 4 519-243-2701 5 519-243-2322 5 519-243-3433 4 519-243-2354 5-9 519-238-2000 7 519-238-2421 4 519-238-2887 5 519-238-2508 5 519-565-2149 8 519-565-2411 7-8 519-565-2213 8 519-565-2233 8 519-524-4409 10 519-524-8813 8 519-524-5361 5 519-396-4336 7 519-832-6535 8-12	519-336-5576 8 53 519-786-4700 4 60 519-786-6841 4 60 519-243-3636 6 54 519-243-3900 4 2 519-243-2701 5 30 519-243-2322 5 52 519-243-3433 4 60 519-243-2354 5-9 96 519-238-2000 7 70 519-238-2421 4 44 519-238-2887 5 12 519-238-2508 8 250 519-565-2149 8 250 519-565-2411 7-8 100 519-565-2411 7-8 100 519-565-2233 8 65 519-524-4409 8 124 519-524-8813 8 28 519-524-5361 10 160 519-396-4336 7 154 519-832-6535 8-12 234	519-336-5576 8 53 4 519-786-4700 4 60 519-786-6841 4 60 519-243-3636 6 54 8 519-243-3900 4 2 519-243-2701 5 30 6 519-243-2322 5 52 8 519-243-3433 4 60 5 519-243-2354 5-9 96 5 519-238-2300 7 70 54 519-238-2421 4 44	519-336-5576 8 53 4 EW 519-786-4700 W W 519-786-6841 4 60 W 519-243-3636 6 54 8 EW 519-243-3900 4 2 C 519-243-2701 5 30 6 EW 519-243-2322 5 52 8 EW 519-243-3433 4 60 5 EW 519-243-2354 5-9 96 5 EW 519-238-2421 4 44 EW 519-238-2887 T T TO 54 EW 519-238-2391 6 12 12 EW 519-238-2508 T EW T 519-565-2149 8 250 75 EW 519-565-2411 T 10 15 EW 519-565-2233 8 65 10 EW 519-524-4409 8 124 30 EW 519-524-8813 8 28 8 EW 519-396-4	519-336-5576 8 53 4 EW 519-786-4700 W G W G 519-786-6841 4 60 W G 519-243-3636 6 54 8 EW G 519-243-3900 4 2 W G 519-243-2701 5 30 6 EW G 519-243-2322 5 52 8 EW G 519-243-3433 4 60 5 EW G 519-243-2354 5-9 96 5 EW G 519-238-2421 4 44 EW GD 519-238-2887 - - - - - 519-238-2508 - - - - - 519-565-2149 8 250 75 EW GD 519-565-2411 - - - - - 519-565-2233 8 65 10 EW GD 519-524-8813 8 28 8 EW	519-336-5576 8 53 4 EW S 519-786-4700 W G R 519-786-6841 4 60 W G R 519-243-3636 6 54 8 EW G SR 519-243-3900 4 2 W G SR 519-243-2701 5 30 6 EW G SR 519-243-2322 5 52 8 EW G SR 519-243-3433 4 60 5 EW G SR 519-238-2344 5-9 96 5 EW GD SR 519-238-2421 4 44 EW GD SR 519-238-2391 6 12 12 EW G 519-365-2149 8 250 75 EW GD SR 519-565-2410 7-8 100 15 EW G SR 519-565-2233 </td <td>519-336-5576 8 53 4 EW S S 519-786-4700 U W G R 519-786-6841 4 60 W G R 519-243-3636 6 54 8 EW G SR M 519-243-3900 4 2 W G SR MH 519-243-2322 5 52 8 EW G SR MH 519-243-3433 4 60 5 EW G SR MH 519-243-2354 5-9 96 5 EW GD SR MH 519-238-2421 4 44 EW GD SR MH 519-238-2887 - - - - MH 519-238-2508 - - - - MH 519-565-2149 8 250 75 EW GD SR 519-565-2411 - - - - - - - - - - -</td> <td>519-336-5576 8 53 4 EW S 4.4t 519-786-4700 U G R U G R U 519-786-6841 4 60 W G R M 17.5t 519-243-3636 6 54 8 EW G SR M 17.5t 519-243-3900 4 2 W G SR MH 9t 519-243-2322 5 52 8 EW G SR MH 14t 519-243-3433 4 60 5 EW G SR W G 519-238-2354 5-9 96 5 EW GD SR W G 519-238-2421 4 44 EW GD SR W G 519-238-2887 G T T T T T MH 9t 519-238-2508 B 2 T EW GD SR W 519-565-2149 B 250 75</td> <td>519-336-5576 8 53 4 EW G S 4.4t • 519-786-6841 4 60 W G R —</td> <td>519-336-5576 8 53 4 EW G S 4.4 - Image: square square</td> <td>519-336-5576 8 53 4 EW S 4.4t .</td> <td>519-336-5576 8 53 4 EW S 4.4t . . TS 519-786-6841 4 60 W G R . <td< td=""><td>519-336-5576 8 63 4 EW G S 4.4t . G TS TS TS 519-786-84700 TS W G R W G R W G R W G T TS <t< td=""><td>519-336-5576 8 63 4 EW G S 4.4t . . TS .</td><td>519-336-5576 8 53 4 EW S 4.4t - - - TS -</td><td>519-336-5576 8 53 4 EW S 4.4t . . TS TS .</td><td>519-336-5576 8 53 4 EW S 4.4 I TS I</td><td>519-336-5576 8 53 4 EW G S 4.4 - G TS G P - P 519-786-4700 - G W G R - W G R - T IS G B - P - P 519-243-3636 6 54 8 EW G SR M 175. 8 B - TS IS B - P 519-243-3900 4 2 B EW G SR MH 90 - TS IS RD M F F TS IS B - TS IS B - P F F P F F P F SR MH MH M TS IS IS M P F TS IS IS IS P P F SR MH MH<!--</td--><td>519-336-5576 8 53 4 EW W S W 4.4 V W T V P 68 519-786-68410 4 80 W G R W G R W T T IS W B W G R W T B T IS B W C P 68 519-243-3636 6 54 8 EW G SR M 17.5 V B T IS B W W P 68 519-243-23000 4 2 B EW G SR MH 14 W T TS IS M W B S W W B S W W B S W W B S W W W W W W W W W W <</td></td></t<></td></td<></td>	519-336-5576 8 53 4 EW S S 519-786-4700 U W G R 519-786-6841 4 60 W G R 519-243-3636 6 54 8 EW G SR M 519-243-3900 4 2 W G SR MH 519-243-2322 5 52 8 EW G SR MH 519-243-3433 4 60 5 EW G SR MH 519-243-2354 5-9 96 5 EW GD SR MH 519-238-2421 4 44 EW GD SR MH 519-238-2887 - - - - MH 519-238-2508 - - - - MH 519-565-2149 8 250 75 EW GD SR 519-565-2411 - - - - - - - - - - -	519-336-5576 8 53 4 EW S 4.4t 519-786-4700 U G R U G R U 519-786-6841 4 60 W G R M 17.5t 519-243-3636 6 54 8 EW G SR M 17.5t 519-243-3900 4 2 W G SR MH 9t 519-243-2322 5 52 8 EW G SR MH 14t 519-243-3433 4 60 5 EW G SR W G 519-238-2354 5-9 96 5 EW GD SR W G 519-238-2421 4 44 EW GD SR W G 519-238-2887 G T T T T T MH 9t 519-238-2508 B 2 T EW GD SR W 519-565-2149 B 250 75	519-336-5576 8 53 4 EW G S 4.4t • 519-786-6841 4 60 W G R —	519-336-5576 8 53 4 EW G S 4.4 - Image: square	519-336-5576 8 53 4 EW S 4.4t .	519-336-5576 8 53 4 EW S 4.4t . . TS 519-786-6841 4 60 W G R . <td< td=""><td>519-336-5576 8 63 4 EW G S 4.4t . G TS TS TS 519-786-84700 TS W G R W G R W G R W G T TS <t< td=""><td>519-336-5576 8 63 4 EW G S 4.4t . . TS .</td><td>519-336-5576 8 53 4 EW S 4.4t - - - TS -</td><td>519-336-5576 8 53 4 EW S 4.4t . . TS TS .</td><td>519-336-5576 8 53 4 EW S 4.4 I TS I</td><td>519-336-5576 8 53 4 EW G S 4.4 - G TS G P - P 519-786-4700 - G W G R - W G R - T IS G B - P - P 519-243-3636 6 54 8 EW G SR M 175. 8 B - TS IS B - P 519-243-3900 4 2 B EW G SR MH 90 - TS IS RD M F F TS IS B - TS IS B - P F F P F F P F SR MH MH M TS IS IS M P F TS IS IS IS P P F SR MH MH<!--</td--><td>519-336-5576 8 53 4 EW W S W 4.4 V W T V P 68 519-786-68410 4 80 W G R W G R W T T IS W B W G R W T B T IS B W C P 68 519-243-3636 6 54 8 EW G SR M 17.5 V B T IS B W W P 68 519-243-23000 4 2 B EW G SR MH 14 W T TS IS M W B S W W B S W W B S W W B S W W W W W W W W W W <</td></td></t<></td></td<>	519-336-5576 8 63 4 EW G S 4.4t . G TS TS TS 519-786-84700 TS W G R W G R W G R W G T TS TS <t< td=""><td>519-336-5576 8 63 4 EW G S 4.4t . . TS .</td><td>519-336-5576 8 53 4 EW S 4.4t - - - TS -</td><td>519-336-5576 8 53 4 EW S 4.4t . . TS TS .</td><td>519-336-5576 8 53 4 EW S 4.4 I TS I</td><td>519-336-5576 8 53 4 EW G S 4.4 - G TS G P - P 519-786-4700 - G W G R - W G R - T IS G B - P - P 519-243-3636 6 54 8 EW G SR M 175. 8 B - TS IS B - P 519-243-3900 4 2 B EW G SR MH 90 - TS IS RD M F F TS IS B - TS IS B - P F F P F F P F SR MH MH M TS IS IS M P F TS IS IS IS P P F SR MH MH<!--</td--><td>519-336-5576 8 53 4 EW W S W 4.4 V W T V P 68 519-786-68410 4 80 W G R W G R W T T IS W B W G R W T B T IS B W C P 68 519-243-3636 6 54 8 EW G SR M 17.5 V B T IS B W W P 68 519-243-23000 4 2 B EW G SR MH 14 W T TS IS M W B S W W B S W W B S W W B S W W W W W W W W W W <</td></td></t<>	519-336-5576 8 63 4 EW G S 4.4t . . TS .	519-336-5576 8 53 4 EW S 4.4t - - - TS -	519-336-5576 8 53 4 EW S 4.4t . . TS TS .	519-336-5576 8 53 4 EW S 4.4 I TS I	519-336-5576 8 53 4 EW G S 4.4 - G TS G P - P 519-786-4700 - G W G R - W G R - T IS G B - P - P 519-243-3636 6 54 8 EW G SR M 175. 8 B - TS IS B - P 519-243-3900 4 2 B EW G SR MH 90 - TS IS RD M F F TS IS B - TS IS B - P F F P F F P F SR MH MH M TS IS IS M P F TS IS IS IS P P F SR MH MH </td <td>519-336-5576 8 53 4 EW W S W 4.4 V W T V P 68 519-786-68410 4 80 W G R W G R W T T IS W B W G R W T B T IS B W C P 68 519-243-3636 6 54 8 EW G SR M 17.5 V B T IS B W W P 68 519-243-23000 4 2 B EW G SR MH 14 W T TS IS M W B S W W B S W W B S W W B S W W W W W W W W W W <</td>	519-336-5576 8 53 4 EW W S W 4.4 V W T V P 68 519-786-68410 4 80 W G R W G R W T T IS W B W G R W T B T IS B W C P 68 519-243-3636 6 54 8 EW G SR M 17.5 V B T IS B W W P 68 519-243-23000 4 2 B EW G SR MH 14 W T TS IS M W B S W W B S W W B S W W B S W W W W W W W W W W <

 $[\]ensuremath{^{\star}}$ The information was reported in 1999 by the individual marina operators.

Table of marine facilities *



Name and location

Jephns in feet

CHAPTER 1 (continued)

Aqua Manufacturing & Marine Port Elgin	519-832-2840							М							М				
Saugeen Marina Motel Lodge Southampton	519-797-2817	6	16	2	w	G	R	мн		вм	•	т			М		Р	68	
Southampton Yacht Club Southampton	519-797-3744	4-12	8		EW		SR	мн		ВМ		TS					Р		
Kit-Wat Marina Motel Restaurant Sauble Beach	519-422-1282	2-3	14	2		G	R			В	•		GIS	RD	вт				
Sauble River Marina Sauble Beach	519-422-1762	2-3	26	5	Е					ВМ		т	s		мвт		Р		
Murdoch McKenzie Marine Services Oliphant	519-534-1017	4	50		w	G	R						1		вт				
Little Red Bay Marina Little Red Bay	519-534-3806	4				G				В			IS	D	мвт		Р		
Anchor's Landing Marina Pike Bay	519-793-4309	3			w		R			В		s			вт				
By the Bay Pike Bay Resort Pike Bay	519-793-3317	3-5	20	5	EW		SR			ВМ		TSL	GIS		MBT		PC		
Stokes Bay Camp and Marina Stokes Bay	519-592-5648	4	45	10	EW	G	SR			ВМ	•	TS	GIS	R	вт		PC	68	

CHAPTER 2

South Bay Marina South Baymouth	705-859-3656	3-9	75	6	EW	G	SR			•	TSL	s	RD		•	Р	68	
Providence Bay Marina Providence Bay	705-377-7225	10	30	5			R				TS	1				PC	68	

CHAPTER 3

Bellevue Marina Sault Ste. Marie	705-759-5312	8-10	175	30	EW	GD	SR			•	TS	IS		•	Р	68	•
Roberta Bondar Marina Sault Ste. Marie	705-759-5430	8	36	36	EW	GD	s			٠	TSL	GIS		•	Р	68	•
Sault Ste. Marie Canal National Historic Site Sault Ste. Marie	705-941-6206	10									т				Р	14	
Lakeside Marine Sault Ste. Marie	705-949-4545																•

CHAPTER 4

Havilland bay	705-649-2101	6	40	8	EW	G	S	М					1	RD			•	PC		
Montreal River Harbour (Trail's End Lodge) Montreal River	705-882-2033	5	15	5	EW	GDP	SR	МН			вм	TSL	1	RD	вт			PC	68	
Buck's (Harry McCluske Municipal) Marina Michipicoten River	705-856-4488	5-8	128	50	EW	GD	SR	МН	4.5t	•	вм	TSL	GIS		МТ	•	•	PC	68	

^{*} The information was reported in 1999 by the individual marina operators.

Table of marine facilities *



CHAPTER 5

No facilities were reported in this area in 1999.										

CHAPTER 6

Public Wharf (managed by Halcyon Haven) Rossport	807-824-2561	6-18	12	6	EW	GD	SR	М		ВМ	٠	TSL	IS	RD	Т	٠	•		16	•
Red Rock Marina Red Rock	807-886-2126	8	67	22	EW	GD	SR					TSL	GIS	D				Р	68	
Nipigon Marina Nipigon	807-887-3824	7-11	45	15	EW	G	SR					TS	1					Р	68	

CHAPTER 7

Prince Arthur's Landing Marina Thunder Bay	807-345-2741	9-10	210	5	EW	GD	SR		1t		•	TSL	1	RD		Р	68	
McKellar Marine Centre Thunder Bay	807-622-3864	11	20	3			R	мн	40.5t			TS						
		Г																
		П																
		П																
		1					l											

 $[\]ensuremath{^{\star}}$ The information was reported in 1999 by the individual marina operators.

					LAK	E HU	RON		
No.	Name	Position Latitude N. Longitude W.		Light acteristi	ics	Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	Remarks Fog Signals
768	Point Edward range	On beach, E. from head of St. Clair River. 43 00 09 82 24 59.5	F	R		12.7		White cylindrical tower, red band at top, fluorescent orange triangular daymark, black vertical stripe. 9.5	Visible in line of range. Year round.
769	Racon (M) X & S Band	180°25' 652.3m from front.	F	R		36.6		On bridge, fluorescent orange triangular daymark, black vertical stripe.	Visible in line of range. Year round. Chart:2260
770	Lake Huron Cut light buoy 2	43 00 33 82 24 54	Q	R	1s			Red, marked "2".	Winter spar. Year round.
771	Kettle Point Reef light buoy V4	NW. of point. 43 14 23 82 03 04	FI	R	4s			Red, marked "V4".	Chart:2260 Seasonal.
774	Grand Bend	On outer end of pier. 43 18 49.7 81 46 05.2	Iso	G	4s	10.7		White cylindrical tower, green upper portion. 7.6	Chart:2260 Year round. Horn - Blast 3s; sil. 27s Operated by the Village of Grand Bend.
									Chart:2260
775.5		43 34 13 81 42 27	F	G		7.6		Cylindrical mast, white daymark, fluorescent orange vertical stripe.	Visible in line of range. Seasonal.
775.6	Bayfield range	076°45' 61.5m from front.	F	G		10.0		Cylindrical mast, white daymark, fluorescent orange vertical stripe.	Visible in line of range. Seasonal.
		I							Chart:2260
776	Bayfield wharf	On S. breakwater. 43 34 10.1 81 42 33	F	R		10.2		White square skeleton mast, red and white rectangular daymark. 6.1	Seasonal. Horn - Blast 3s; sil. 27s Horn points 270°.
									Mariners requiring horn to be turned on can activate it clicking radio mike five times within a five (5) second window on channel 19 - 156.95 VHF. Horn can be activated with 1 watt power at 3 NM range. Horn will stay activated for 30 minutes and can be reactivated as required.
									Chart: 2260
Goderich									
777	Goderich Main	On high bank, S. of harbour entrance. 43 44 31.6 81 43 28.7	FI(2)	W	25 s	42.7	16	White square tower, red upper portion.	Flash 0.5 s; eclipse 5.5 s; flash 0.5 s; eclipse 18.5 s Seasonal.
		01 40 20.1							Chart:2291
778	North Breakwater	On W. end of N. breakwater off entrance to harbour. 43 44 47.8 81 44 15.4	FI	G	4s	7.8	5	White structure. 6.1	Seasonal.
									Chart:2291

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

						E HU	IVOIN			
No.	Name	Position Latitude N. Longitude W.		Light acteris	tics	Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	Remarks Fog Signals	
Goderich	ı (Cont'd)									
778.5	Maitland River	43 44 56.9 81 43 58.7	FI	W	4s	9.1	5	Cylindrical mast. 4.1	Seasonal. Chart:2291	
779	South Breakwater	On W. end of S. breakwater. 43 44 43	Oc	R	6s	10.3		Tower on white square building.	Emergency light. Seasonal.	
		81 44 10.9							Chart:2291 1929/99	
780	North Pier range	On N. pier. 43 44 46.5 81 43 49.9	F	R		13.8		Triangular skeleton tower, white daymark, orange vertical stripe. 10.8	Visible 015° on either side of line range. Seasonal	of
781		086°30' 181.4m from front.	F	R		19.8		Skeleton tower, white daymark, orange vertical stripe.	Seasonal	
								15.2	Chart:2291 1929/99	
782	Point Clark	On extremity of low point. 44 04 22.1 81 45 25.6	FI	W	3.5 s	s 28.3	14	White cylindrical tower. 21.0	Flash every 3.5 s Seasonal.	
									Chart:22	61
783	Kincardine Sector	44 10 40 81 38 07	Oc	R W G	10s	9.8		Cylindrical mast, white daymark, orange vertical stripe. 6.1	Flash 5 s; eclipse 1 s; flash 1 s; eclipse 1 s; flash 1 s; eclipse 1 s Seasonal. Red from 034° to 099°, white froi 099° to 103°; green from 103° to 168°.	m
									Horn - Blast 3 s; sil. 27 s Horn points 330°. Seasonal.	
									Chart:22 Edn 06/0	
784	Kincardine	44 10 38 81 38 18	FI	R	5s	24.4		White octagonal tower, orange vertical stripe.	Seasonal.	
									Chart:22 Edn 06/0	
785	Logie Rock light buoy VC2	N. of rock. 44 27 41	FI	R	4s			Red, marked "VC2".	Seasonal.	
		81 27 01							Chart:22	91
786		Near outer end of wharf.	F	G		8.6		Cylindrical mast, white daymark, orange vertical	Visible in line of range. Seasonal.	
		44 26 39.7 81 24 13.1	F	G		10.1		stripe.	Visible 360°.	
787	Port Elgin range	109°11' 146.1m from front.	F	G		15.9		Cylindrical mast, white daymark, orange vertical stripe.	Seasonal.	
								12.4	Chart:22	91
787.5	Port Elgin North breakwater	On end of N. breakwater. 44 26 42.8	FI	G	4s	8.3		Cylindrical mast, red and white rectangular daymark.	Privately operated. Seasonal.	
		81 24 21						6.0	Chart:22	91

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

					LAI	KE HU	RON		
No.	Name	Position Latitude N. Longitude W.	Cha	Light racteris	tics	Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	Remarks Fog Signals
787.7	Port Elgin South breakwater	On end of S. breakwater. 44 26 41.2	FI	R	4s	8.1		Cylindrical mast, red and white rectangular daymark.	Privately operated. Seasonal.
		81 24 21.9						6.5	Chart:2291
788	Chantry Island	On E. side of island W. from Saugeen. 44 29 24 81 24 09	FI	W	4s	31.4	6	White cylindrical tower. 26.2	Seasonal. Chart: 2292
790		On cribwork block	F	G		11.0		White tower, orange	Visible in line of range.
		on breakwater, near outer end.	F	W		11.9		vertical stripe. 9.1	Seasonal.
		44 30 06 81 22 33							Horn - Blast 3s; sil. 17s.
704	Saugeen range	005°45' 702 7	_	0		10.0		White house over a	Mariners requiring horn to be turned on can activate it clicking radio mike five times within a five (5) second window on channel 19 - 156.95 VHF. Horn can be activated with 1 watt power at 3 NM range. Horn will stay activated for 30 minutes and can be reactivated as required.
791		095°15' 722.7m from front.	F	G		18.6		White tower, orange vertical stripe. 9.4	Visible in line of range and over a small arc on each side of range.
									Chart:2292
792	Saugeen River Turning light buoy VJ3	S. of Lambert Shoal. 44 30 12 81 23 27	Q	G	1s			Green, marked "VJ3".	Seasonal. Chart: 2292
793	Southampton light buoy VJ2	Off NE. end of Chantry Shoal. 44 30 39 81 23 41	FI	R	4s	*****	*****	Red, marked "VJ2".	Seasonal. Chart: 2292
794		On crib. 44 43 49.3	F	R		4.9		Cylindrical mast, white daymark, orange vertical	Seasonal.
		81 16 53.3						stripe. 4.8	
795	Oliphant range	058°12' 221m from front.	F	R		9.4		Cylindrical tower, white daymark, orange vertical stripe.	Seasonal.
								8.8	Chart:2292
796	Lyal Island	On W. side of island. 44 57 03 81 25 07	FI	W	4s	14.9	6	Square skeleton tower, red and white rectangular daymark. 12.0	Seasonal.
								12.0	Chart:2292
796.3	Stokes Bay Entrance light buoy VK2	44 56 50 81 27 36	FI	R	4s			Red, marked "VK2".	Seasonal. Chart:2292 1713/99
797	Stokes Bay range	On NW. extremity of most westerly Knife Island. 44 58 01.3 81 23 25.6	FI	R	4s	9.4		White tower, orange vertical stripe. 12.6	Seasonal.
798		068°55' 1,219.1m from front.	F	R		19.0		Skeleton tower, white enclosed upper portion, orange vertical stripe. 22.6	Visible in line of range. Seasonal.
								*	Chart:2292

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

	1	ı						1	
No.	Name	Position Latitude N. Longitude W.		∟ight icteristi	cs	Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	Remarks Fog Signals
798.5	Pine Tree Harbour range	45 04 18.4 81 29 54	Iso	R	4s	8.0		Cylindrical mast, white daymark, orange vertical stripe.	Visible in line of range. Seasonal.
798.6		035° 85.6m from front.	F	R		10.6		Cylindrical mast, white daymark, orange vertical stripe. 9.6	Visible in line of range. Seasonal Chart:2292 1908/99
799	Cape Hurd	On outer point of cape. 45 13 15.6 81 43 44.9	FI	R	4s	8.9		Cylindrical mast, red and white rectangular daymark. 7.7	Seasonal. Chart:2274
800	Southwest Bank light buoy TA1	S. extremity of bank. 45 14 02 81 45 26.8	FI	G	4 s			Green, marked "TA1".	Seasonal. Chart: 2274
801	Cove Island light and bell buoy T	W. of island. 45 19 54 81 50 56	Mo(A)	W				Red and white vertical stripes, marked "T".	Seasonal. Chart: 2235
802.5	West Sister Shoal light buoy J2	N. side of shoal. 45 22 05 81 47 52	FI	R	4s			Red, marked "J2".	Seasonal. Chart: 2235
803	Lucas Island light buoy J3	W. of island. 45 23 30 81 46 31	FI	G	4s			Green, marked "J3".	Winter spar. Seasonal. Chart: 2235
804	Lucas Island	N. side of island. 45 23 36 81 45 59	FI	R	4s	14.6		Cylindrical mast, red and white rectangular daymark, red triangle in centre.	Seasonal.
								8.7	Chart:2235
805	Cove Island	On Gig Point Entrance to Georgian Bay. 45 19 37	FI	W	5s	30.8	16	White cylindrical structure.	Flash every 5 s Emergency light. Seasonal.
806	South Baymouth light buoy JS2	81 44 07 SW. of Wallace Rock. 45 32 14 82 01 36.5	FI	R	4s			Red, marked "JS2".	Chart: 2235 Seasonal.
806.5	Inkster Rock light buoy JS5	SE. of rock. 45 33 07.5 82 01 05.5	FI	G	4s			Green, marked "JS5".	Chart: 2273 Seasonal.
806.7	McGaw Point light buoy JS8	45 33 19.5 82 00 51	Q	R	1s			Red, marked "JS8".	Chart: 2273 Seasonal. Chart: 2273

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

LAKE HURON										
No.	Name	Position Latitude N. Longitude W.		Light Characteristics		Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground		Remarks Fog Signals
807		On SE. end of small island. 45 33 28 82 00 48.2	F	G		8.5		White square structure, orange vertical stripe. 5.2	Seasonal.	ne of range. st 2.5s; sil. 27.5s
808	South Baymouth range	024°50′ 238.6m	F	G		14.0		White square structure,	turned on of radio mike (5) second 156.95 VH with 1 watt Horn will s	equiring horn to be can activate it clicking five times within a five window on channel 19 F. Horn can be activate power at 3 NM range, tay activated for 30 d can be reactivated as
000		from front.	Г	G		14.0	••••	orange vertical stripe.	Seasonai.	
	'	l.						0.1		Chart:2273
809	Providence Bay light buoy JH1	45 38 56 82 17 30	FI	G	4s			Green, marked "JH1".	Seasonal.	
										Chart:2298
810	Providence Bay	On extremity of Providence Point, Manitoulin Island. 45 39 05 82 16 32	F	W		14.3	12	Skeleton tower, daymarks, red and white horizontal stripes on 3 seaward faces.	Seasonal.	
		32 13 32								Chart:2266
811	Providence Bay wharf	On outer end of wharf. 45 39 30 82 16 06	FI	R	4s	7.6	10	Cylindrical mast. 6.1	Seasonal.	
		02 10 00								Chart:2266
812	Great Duck Island	On SW. point of island. 45 38 30 82 57 48	FI(3)	W	15s	32.9		White octagonal tower. 25.9		ose 2.5 s; flash; s; flash; eclipse 10 s y light.
										Chart:2266
813	Mississagi Strait	On W. side of Manitoulin Island. 45 53 36 83 13 30	Iso	W	4s	19.6	10	Square skeleton tower, red and white rectangular daymark. 12.2	Seasonal.	
										Chart:2267

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

ST. MARYS RIVER

				<u> </u>	. IVI	ARYS	KIVEI	<u> </u>		
No.	Name	Position Latitude N. Longitude W.	Cha	Light Characteristics		Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground		marks Signals
1059.6		On the point, St. Joseph Island. 46 07 39 84 00 00	F	W		11.6		Square tower, white daymark, orange vertical stripe.	Seasonal.	
1059.7	Hay Point range	128° 335.3m from front.	F	W		18.3		Square tower, white daymark, orange vertical stripe.	Seasonal.	
								15.5		Chart:14882(U.S.)
1059.8	Everens Point light buoy Q16	NE. of point. 46 14 47 84 06 12	FI	R	4s			Red, marked "Q16".	Winter spar. Seasonal.	Ch ant 4 4992/11 C \
										Chart:14883(U.S.)
1060	Sailors	46 15 40.5 84 05 53.8	F	W		23.1		Square skeleton tower, white daymark, orange vertical stripe. 15.0	Seasonal.	
1061	Encampment Upbound range	016°55' 665.4m from front.	F	W		31.7		Square skeleton tower, white daymark, orange vertical stripe. 17.8	Seasonal.	
										Chart:2250
1061.5	Sailors Encampment light buoy Q22	46 15 37 84 06 02.5	FI	R	4s			Red, marked "Q22".	Winter spar. Seasonal.	
										Chart:2250
1062		46 15 15 84 05 43.2	F F	w		9.8 10.1		Cylindrical mast, white daymark, orange vertical stripe.	Visible in line of Emergency light Seasonal.	
	Rains Wharf range							7.8		
1063		134°56' 268.1m from front.	F	W		16.2		Square skeleton tower, white daymark, orange vertical stripe. 13.3	Seasonal.	
										Chart:2250
1063.5	Coyle Point light buoy Q28	46 16 17 84 06 55	Q	R	1s			Red, marked "Q28".	Winter spar. Seasonal.	
										Chart: 2250
1063.6	Coyle Point North light buoy Q30	46 16 52.3 84 06 57.6	FI	R	4s			Red, marked "Q30".	Winter spar. Seasonal.	
										Chart:2250
1063.8	Green Point light buoy Q34	46 17 26.8 84 07 01	FI	R	4s			Red, marked "Q34".	Winter spar. Seasonal.	
										Chart:2250
1063.9	Munuscong Channel light buoy Q36	46 18 01.3 84 07 03.5	FI	R	4s		*****	Red, marked "Q36".		Chart:2250
105 :			_	,						GHAI 1.2230
1064	Stribling Point	46 18 46.8 84 06 55.5	F	W		19.4		Square skeleton tower, white daymark, orange vertical stripe. 13.1	Seasonal.	
1065	Upbound range	111°55' 961.4m from front.	F	W		30.4		Square skeleton tower, white daymark, orange vertical stripe.	Year round.	
								13.1		Chart:14883(U.S.)

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

ST. MARYS RIVER

				S	<u>Т. М</u>	ARYS	RIVE	R		
No.	Name	Position Latitude N. Longitude W.	Cha	Light aracteris	tics	Focal Height in m. above water	Nomi- nal Range	Description		emarks g Signals
1065.5	Birch Point light	S. entrance to Lake	FI	R	4s			Red spar, marked "QV18".	Seasonal.	
	buoy QV18	George. 46 22 15 84 08 12.5								Chart:14883(U.S
1065.7	Pumpkin Point light buoy QX2	SW. of point. 46 23 28 84 08 27	FI	R	4s			Red spar, marked "QX2".	Seasonal.	Chart:14883(U.S
1065.8	Bellevue Marine light buoy QC1	46 29 45.5 84 18 08.5	Q	G	1s			Green spar, marked "QC1".	Seasonal.	·
1065.9	Bellevue Marine breakwater	On E. end of breakwater. 46 30 02 84 18 23.7	Iso	G	2s	8.0		Cylindrical mast, red and white rectangular daymark.	Seasonal.	Chart:14884(U.S
1066	Bayfield Dyke	On N. side of channel. 46 29 54 84 18 58	Iso	R	4s	7.6		Cylindrical mast, red and white rectangular daymark, red triangle in centre on both sides. 4.9	Seasonal.	·
1066.2	Bayfield light buoy 108 (U.S.)	46 30 03 84 19 38	FI	R	4s			Red, marked "108".	Seasonal.	Chart:14884(U.\$
1066.4	Bayfield Channel light buoy 110 (U.S.)	Off Can. Soo wharf. 46 30 12 84 19 57	FI	R	4s			Red, marked "110".	Seasonal.	Chart:14884(U.9
	lights in each row are		y two r	ows, one	e on e	ach side c	of the can	al. The most easterly and	the most	
1070	Canadian Canal,	On pier. 46 30 53.1 84 22 17.5	F	R		12.3		Square skeleton structure, red daymark, white vertical stripe. 9.2	Seasonal.	
1071	Upper Entrance range	On point, 050°48' 247.2m from front.	F	R		19.1		Square skeleton structure, red daymark, white vertical stripe.	Seasonal.	
								15.2		Chart:14884(U.S
1072	Upper Turning light buoy QM11	E. side of channel. 46 30 43 84 22 31	Q	G	1s			Green, marked "QM11".	Winter spar. Seasonal.	
1073	Vidal Shoals North light buoy QM14	W. side of channel. 46 30 25 84 23 14	FI	R	4s			Red, marked "QM14".	Winter spar. Seasonal.	Chart:14884(U.\$
1074	Vidal Shoals Northeast light buoy QM13	E. side of channel. 46 30 29.5 84 22 55.5	FI	G	4s		*****	Green, marked "QM13".	Winter spar. Seasonal.	Chart:14884(U.\$
1075	Vidal Shoals West light buoy QM24	W. side of channel. 46 30 02 84 23 53	FI	R	4s			Red, marked "QM24".	Winter spar. Seasonal.	Chart:14884(U.\$
		04 20 00								Chart:14884(U.S

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

ST. MARYS RIVER

	SI. MARYS RIVER									
No.	Name	Position Latitude N. Longitude W.	Cha	Light racteris	tics	Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	-	narks signals
1076	Vidal Shoals West Cardinal light buoy P	E. side of channel. 46 30 06 84 23 35	Q(9)	W	15s			Yellow, black and yellow, marked "P".	Winter spar. Seasonal.	Chart:14884(U.S.)
1076.5	Pointe aux Pins light buoy 10 (U.S.)	46 29 41 84 25 31	FI	R	4s			Red, marked "10".	Seasonal.	, ,
1076.6	Pointe aux Pins Bay light buoy P12	46 28 45 84 27 16	FI	R	4s			Red, marked "P12".	Winter spar. Seasonal.	Chart:14884(U.S.) Chart:14884(U.S.)
1076.7	Pointe aux Pins Bay light buoy P14	46 28 22 84 27 52	FI	R	4s			Red, marked "P14".	Winter spar. Seasonal.	, ,
1077	Pointe aux Pins	On extremity of Point Louise. 46 28 04 84 28 20	F	G		9.1		Tower, white daymark, orange vertical stripe. 7.9	Visible in line of i Seasonal.	Chart:14884(U.S.) range.
1078	range	233°06' 280.9m from front.	F	G		19.0		Tripod skeleton tower, white daymark, orange vertical stripe. 16.8	Seasonal.	Chart:14884(U.S.)
1078.5	Pointe des Chênes light buoy P34	46 27 55 84 33 31	FI	R	4s			Red, marked "P34".	Seasonal.	Chantel 4004/11 C \
1079	Pointe aux Pins Main	On outer end of low sand point. 46 27 50.8 84 28 22.3	F	R		8.2	6	Cylindrical tower, red and white horizontal bands. 6.1	Seasonal.	Chart:14884(U.S.)
1079.5	Point Louise light buoy P20	46 27 40 84 28 44	FI	R	4s			Red, marked "P20".	Winter spar. Seasonal.	Chart:14884(U.S.)
1079.6	Brush Point light buoy P19	SW. of point. 46 27 27 84 28 40	FI	G	4s			Green, marked "P19".	Winter spar. Seasonal.	Chart:14884(U.S.)
1079.7	Cedar Point light buoy P22	N. of point. 46 27 27 84 29 48	FI	R	4s			Red, marked "P22".	Winter spar. Seasonal.	Chart:14884(U.S.)
1080	Sault Ste. Marie Airport Beacon	NE. Pointe aux Chênes. 46 29 11 84 29 32	FI	W	10s			On top of water tank.	Flash every 10 s Privatly operated Seasonal.	l.
1080.5	Point Iroquois light buoy P38	46 29 10 84 35 06	FI	R	4s			Red, marked "P38".	Winter spar. Seasonal.	Chart:14884(U.S.)
1081	Gros Cap Reefs Racon (K) X & S Band	On crib, SW. extremity of reefs. 46 30 43.7 84 36 55	FI	R	5s	18.1	12	White square block.	Flash every 5 s Emergency light. Seasonal.	Chart:14884(U.S.) Chart:14884(U.S.)

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

-									
No.	Name	Position Latitude N. Longitude W.	Cha	Light racteristi	cs	Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	Remarks Fog Signals
1082	Île Parisienne	On SW. extremity of island. 46 38 42.8 84 43 26.5	FI	W	10s	16.1	14	White hexagonal tower.	Flash 1 s; eclipse 9 s Operational at night only. Emergency light. Seasonal.
									Chart:2300
1083	Goulais Bay	On point. 46 41 46.3 84 31 22.9	FI	W	4s	11.7		Cylindrical mast, red and white rectangular daymark. 5.8	Seasonal.
									Chart:2315
1084	Maple Island	On W. side of island. 46 46 07.7 84 34 51.9	FI	W	4s	9.5		Square skeleton mast, red and white rectangular daymark.	Seasonal.
									Chart:14962(U.S.)
1087	Coppermine Point	On extremity of point.	Iso	W	4s	14.8	12	Square skeleton tower, red and white rectangular daymark.	Seasonal.
		84 47 12						6.1	Chart:2307
1088	Mamainse Harbour Racon (M) X Band	On N. point of largest island off Mamainse Point.	F	R		10.9	6	Cylindrical mast, red and white rectangular daymark, red triangle in centre.	Seasonal. Chart: 2315
		84 47 11.6						6.7	2115/99
1089	Montréal Point	On high bluff on point at Montréal River entrance. 47 14 30 84 39 00	F	W		40.5	8	Cylindrical mast, red and white rectangular daymark. 8.2	Seasonal.
		04 39 00							Chart:2307
1089.5	Sinclair Island	SW. side of island. 47 22 29.9 84 42 33.2	FI	W	4s	17.4	10	Cylindrical mast, red and white rectangular daymark.	Seasonal.
								6.1	Chart:2315
1090	Rowe Island	At NE. tip of island. 47 26 25 84 47 36	FI	W	4s	8.5		Cylindrical mast, red and white rectangular daymark.	Seasonal.
								6.1	Chart:2307
1091	Gargantua	On summit of Gargantua Island. 47 33 29.7	FI	W	4s	24.0		Cylindrical mast, red and white rectangular daymark.	Seasonal.
		84 57 47.9						4.9	Chart:2315
1092	Hursley Island	47 35 46 85 02 33	FI	W	4s	13.6		Cylindrical mast, red and white rectangular daymark.	Seasonal.
								4.5	Chart:2307
1092.5	Michipicoten River	47 55 59.7	Iso	R	4s	4.3		Cylindrical mast.	Seasonal.
	Entrance	84 51 06.9							Chart:2315

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

LAKE SUPERIOR

		₹							
No.	Name	Position Latitude N. Longitude W.	Cha	Light racteris	tics	Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	Remarks Fog Signals
1093	Michipicoten Harbour	On SE. extremity of Perkwakwia Point. 47 56 33 84 54 27	FI	W	30 s	26.8	16	Square skeleton tower. 12.2	Flash every 30 s. Emergency light. Seasonal.
		0. 0. 1							Horn - Blast 3s; sil. 3s; blast 3s; sil. 51s Horn points 210°.
									Mariners requiring horn to be turned on can activate it clicking radio mike five times within a five (5) second window on channel 19 - 156.95 VHF. Horn can be activated with 1 watt power at 3 NM range. Horn will stay activated for 30 minutes and can be reactivated as required.
									Chart:2315
1094		On shore, N. of inner end of wharf. 47 57 41.5 84 54 05	F	R		15.8		Mast.	Privately operated. Lights in line lead to Commercial pier. Operated by Algoma Central Railway. Seasonal.
1095	Michipicoten Harbour range	355° 106.7m from front.	F	R		29.3		Mast.	Privately operated. Lights in line lead to Commercial pier. Operated by Algoma Central Railway. Seasonal.
									Chart:2315
1096	Caribou Island Racon (C)	On small island SW. of Caribou Island. 47 20 23	FI	W	15s	30.2	17	Hexagonal tower. 24.4	Flash 1 s; eclipse 14 s Emergency light. Seasonal.
	X & S Band	85 49 32							Chart:2310
									
Michipico	ten Island								
1097	Michipicoten Island	On NE. extremity of island. 47 45 15 85 35 45	FI	W	10s	25.6	14	White hexagonal tower. 21.6	Flash 0.5s; eclipse 9.5s Emergency light. Seasonal.
									Chart:2309 712/99
1098	Davieaux Island	On summit of island, S. of Québec Harbour, Michipicoten.	FI	W	20s	39.3	20	White hexagonal tower. 13.4	Flash 0.5 s; eclipse 19.5 s Emergency light. Seasonal.
		47 41 41.5 85 48 39.7							Horn – Blast 3s; sil. 3s; blast 3s; sil. 51s
									Mariners requiring horn to be turned on can activate it clicking radio mike five times within a five (5) second window on channel 19 - 156.95 VHF Horn can be activated with 1 watt power at 3 NM range. Horn will stay activated for 30 minutes and can be reactivated as required.

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

Chart:2315 Edn. 11/99

				L/	411	: 50PI	ERIUR	<u> </u>		
No.	Name	Position Latitude N. Longitude W.		Light acteristi	ics	Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	Remarks Fog Signa	
Michinic	oten Island (Cont'd)									
	oten island (oont d)	0.11.1	_						N	
1099	Québec Harbour	On N. shore of harbour. 47 43 01.5 85 47 54	F	W		6.4		White rectangular house, fluorescent orange vertical stripe. 3.1	Visible in line of range Seasonal.	Đ.
1100	range		_			20.4				
1100		000°45' 129.5m from front.	F	W		20.1		Square skeleton tower, white daymark, fluorescent orange vertical stripe. 12.8	Seasonal.	Chart: 2315
4404		0 11:1					_			Chart.2313
1101	Michipicoten Island, West End	On small island, SW. of Cotton Cove. 47 43 05 85 57 21	FI	W	4s	9.1	5	Cylindrical mast, red and white rectangular daymark. 8.5	Seasonal.	
										Chart:2308
1102	Otter Island	On NW. extremity of island. 48 06 43.5 86 04 00	FI	W	8s	29.6	18	White tower. 6.3	Flash every 8 s Emergency light. Seasonal.	
		60 U4 UU								Chart:2308 712/99
1106	Hawking Island	SW. end of island.	FI	W	40	27.1	5	Skeleton tower, white	Year round.	
1106	Hawkins Island	48 43 12 86 25 52	FI	VV	4s	27.1	5	slatwork daymark. 12.5	Year round.	Chart:2306
1107	Skin Island	On SW. corner of island. 48 43 41	FI	W	4s	14.9	5	Cylindrical mast, red and white rectangular daymark.	Year round.	
		86 23 39						6.4		Chart:2304
1110	Jackfish Bay	On SW. extremity of St. Patrick Island.	FI	W	4s	12.5	5	Cylindrical mast. 4.9	Light should be given least a cable when pa	a berth of at
		86 58 54								Chart:2305
1111	Slate Islands	On S. extremity of Patterson Island. 48 37 16 86 59 45	FI(2)	W	15 s	68.3	20	White tower. 6.7	Flash; eclipse 3.5 s; fl eclipse 11.5 s Emergency light. Year round.	ash;
										Chart:2303
1111.1	Terrace Bay	48 46 08 87 07 14	FI	W	4s	4.9		White cylindrical mast. 4.8	Privately operated by of Terrace Bay. Seasonal.	the Township
									ocasona.	Chart:2303 Edn. 11/99
1112	Rossport	On wharf. 48 50 01 87 31 12	F	R		4.9	6	Cylindrical mast. 3.6	Year round.	
										Chart:2312
1113	Rossport Harbour Entrance	On small island at entrance to harbour. 48 49 32	FI	W	4s	11.3	5	Cylindrical mast, red and white rectangular daymark.	Year round.	
		87 31 22						4.9		Chart:2312

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

			LANE 301 EINON							
No.	Name	Position Latitude N. Longitude W.		Light acteris	tics	Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	Remarks Fog Signal	
1114	Rossport Point	On point. 48 49 32 87 32 54	FI	W	4s	7.6	5	Cylindrical mast, red and white rectangular daymark. 6.0	Year round.	Chart:2312
Nipigon I	 Вау									
1117	Battle Island	On W. end of island. 48 45 06 87 33 24	FI(3)	W	24 s	36.0	13	Tower. 13.1	Flash; eclipse 4 s; flas flash; eclipse 16 s Emergency light. Radar reflector. Year round.	h; eclipse 4 s; Chart:2312
										712/99
1120	Crichton Island	At SE. end of island. 48 57 07 88 06 19	FI	W	4s	10.7	5	Square skeleton tower, red and white rectangular daymark. 6.0	Year round.	
								G.G		Chart:2312
1121	Burnt Island	48 54 58 88 11 45	FI	W	4s	19.0		Grey cylindrical mast, red and white rectangular daymark. 6.1	Seasonal.	Chart:2312 Edn 06/00
1124	Nipigon Strait	48 42 02 88 06 00	FI	R	4s	8.8		Cylindrical mast, white daymark, red vertical stripe. 6.3	Year round.	
1125	range	014°30' 80.2m from front.	FI	R	4s	12.2		Square skeleton tower, white daymark, red vertical stripe. 7.6	Year round.	
								7.5		Chart:2312
1126	Lamb Island	Centre of island. 48 36 14 88 08 34	FI	W	5s	30.2	15	Tower. 12.2	Flash every 5 s. Emergency light. Year round.	
										Chart:2312 712/99
1127	Shaganash	On W. end of island No. 10, W. of Shaganash Island. 48 26 10 88 28 50	FI	W	4s	11.0	5	Square tower. 7.3	Year round.	Chart:2302
1128	Point Porphyry	On SW. extremity of island, entrance to Black Bay. 48 20 24 88 38 54	FI	W	10s	25.0	15	Tower, white slatwork daymark. 14.6	Flash 1 s; eclipse 9 s Fixed white between fl Emergency light. Year round.	
										Chart:2301 712/99

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

LAKE SUPERIOR										
No.	Name	Position Latitude N. Longitude W.	Cha	Light iracteris	tics	Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	Remarks Fog Signa	
1129	Trowbridge Island	On summit of island. 48 17 34 88 52 25	FI	w	5s	34.7	16	White octagonal tower. 7.0	Flash every 5 s Emergency light. Year round.	
										Chart:2311 712/99
1130	Angus Island	Near N. end of island. 48 14 09 89 00 26	FI	W	20s	24.7	16	Square skeleton tower.	Flash 1 s; eclipse 19 s Emergency light. Year round.	3
1121	Thursday Cone		FI	w	4-	10.7	-	Chalatan tauran mad and	Vaaraanad	Chart:2311
1131	Thunder Cape	W. side of cape. 48 18 07 88 56 19	FI	VV	4s	10.7	5	Skeleton tower, red and white rectangular daymark.	Year round.	
								7.6		Chart:2311
1133	Welcome Island	On NE. extremity of the eastern island. 48 22 10 89 07 14	FI	W	5s	42.1	16	Square skeleton tower.	Flash every 5 s Emergency light. Year round.	
										Chart:2314 712/99
Thunder	Вау									
1135	Mission Channel Approach light buoy AA2	48 20 45 89 09 54	FI	R	4s	••••	••••	Red, marked "AA2".	Seasonal.	Chart:2314
1136	Mission Channel	At outer corner of	FI	G	2s	13.4	8	White square tower, red	Flash 0.5 s; eclipse 1.	
	Entrance	breakwater. 48 21 00 89 12 04						upper portion. 7.6	Year round.	Chart:2314 712/99
				_						
1137	Mission Channel light buoy A8	On N. side of channel at entrance. 48 21 05 89 12 01	FI	R	4s			Red, marked "A8".	Seasonal.	
			_	_						Chart:2314
1138	Mission River Entrance Breakwater	On inner end of breakwater. 48 21 14 89 13 01	F	G		6.4		Cylindrical mast, red and white rectangular daymark, black square in centre.	Year round.	
								4.8		Chart:2314
1139	Mission Channel	At mouth of Mission River. 48 21 25 89 13 33	F	R		11.3		Cylindrical mast, white daymark, red vertical stripe. 9.1	Year round.	
1140	range	289°05' 259.1m from front.	F	R		17.1		Square skeleton tower, white daymark, red vertical stripe.	Year round.	
								13.7		Chart:2314
1141	Old Dumping Ground Shoal	E. of shoal. 48 23 08	FI	R	4s			Red, marked "P2".	Seasonal.	
	light buoy P2	89 10 41.5								Chart:2314

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

					ANE	SUPI	ERIUR	<u> </u>		
No.	Name	Position Latitude N. Longitude W.	Light Characteristics		Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	Remarks Fog Signa		
Thunder	Bay (Cont'd)									
1143.3	Kaministiquia River Entrance light buoy D1	E. side river entrance. 48 23 45.5 89 11 56.5	FI	G	4s			Green, marked "D1".	Seasonal.	Chart:2314
1144	Kaministiquia River Entrance	On breakwater at N. side of river entrance. 48 23 53 89 12 00	FI	R	10 s	6.7	5	Tower on a building.	Flash 4 s; eclipse 6 s Floodlit. Year round.	Chart:2314
1144.1	Kaministiquia River Terminal Entrance light	48 23 34.5 89 12 40	Q	G	1s			Green, marked "D7".	Seasonal.	712/99
	buoy D7									Chart:2314
1144.3	Kaministiquia River Entrance Inner	N. side of Old Elevator wharf. 48 23 38 89 12 54	F	R		7.9	5	Cylindrical mast, red and white rectangular daymark. 6.0	Year round.	
1144.4	Kaministiquia River Entrance South	48 23 32 89 12 50	F	G		4.5		Mast.	Privately operated. Year round.	Chart:2314
1145	Kaministiquia River	On S. bank of river. 48 21 43 89 15 21	F	G		12.5		Cylindrical mast. 6.0	Year round.	Chart:2314
		03 13 21								Chart:2314
1146	Kaministiquia River Water Mains Crossing North	On N. side of river. 48 21 48 89 15 32	F	R		9.8		Cylindrical mast. 6.7	Visible from 285° thro to 105°. Year round.	ugh N. and E.
										Chart:2314
1147	Kaministiquia River Water Mains Crossing South	On S. side of river. 48 21 43 89 15 36.5	F	Υ		8.5	5	Cylindrical mast. 6.4	Year round.	
1150	Thunder Bay South Entrance, North	On N. side of S. entrance to harbour. 48 24 43.5 89 12 21	FI	R	4s	9.4		Cylindrical mast, red and white rectangular daymark, red triangle in centre. 6.0	Year round.	Chart:2314
										Chart:2314
1150.3	Thunder Bay South Entrance, South	On breakwater, S. side of S. entrance. 48 24 38 89 12 18	FI	G	5s	8.2	8	Mast on building. 3.0	Flash 1 s; eclipse 4 s Floodlit. Year round.	
										Chart:2314 712/99
1151	Thunder Bay Central Entrance, South	On breakwater, S. side of main entrance. 48 25 54 89 11 52	FI	G	4s	7.0		Cylindrical mast, red and white rectangular daymark, black square in centre. 6.0	Floodlit. Year round.	Chart:2314

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

LAKE SUFERIOR						<u> </u>			
No.	Name	Position Latitude N. Longitude W.	Cha	Light aracteris	tics	Focal Height in m. above water	Nomi- nal Range	Description Height in meters above ground	Remarks Fog Signals
Thunder	Bay (Cont'd)								
1152	Thunder Bay Main	On end of breakwater, N. side of Central entrance. 48 25 58 89 11 45	FI	R	5s	14.9	12	White square tower. 9.4	Flash every 5 s Floodlit. Emergency light. Year round. Horn - Blast 2s; sil. 3s; blast 2s; sil. 3s; blast 2s; sil. 48s
									Mariners requiring horn to be turned on can activate it clicking radio mike five times within a five (5) second window on channel 19 - 156.95 VHF. Horn can be activated with 1 watt power at 3 NM range. Horn will stay activated for 30 minutes and can be reactivated as required.
									Chart:2314
1153	Thunder Bay light buoy E3	48 25 55 89 12 12.5	Q	G	1s			Green, marked "E3".	Seasonal.
1150	Thursday Day	Near N. end of S.	FI	G	4s	9.4	13	Mast on a building.	Chart:2314 Floodlit.
1156	Thunder Bay North Entrance South	breakwater. 48 26 38	FI	G	45	9.4	13	3.6	Year round.
		89 10 38							Chart: 2314 712/99
1157	Thunder Bay North Entrance North	Near SW. end of N. breakwater. 48 26 42 89 10 32	FI	R	4s	8.5		Cylindrical mast, red and white rectangular daymark, red triangle in centre.	Floodlit. Year round.
								0.0	Chart:2314
1158	Pie Island	On point of island. 48 13 45 89 10 30	FI	W	4s	9.8	5	Square skeleton tower, red and white rectangular daymark.	Year round.
								7.6	Chart:2311
1159	Mink Point	On point. 48 08 22 89 18 09	FI	W	4s	9.1	5	Square skeleton tower, red and white rectangular daymark. 7.6	Year round.
									Chart:2311
1160	Jarvis Rock	W. side of Spar Channel. 48 06 10 89 17 35	FI	W	4s	12.2	5	Cylindrical mast, red and white rectangular daymark. 6.0	Year round.
									Chart:2311
1161	Victoria Island	Extremity of point at NW. end of island. 48 04 52 89 21 38	FI	W	4s	18.0	6	Square skeleton tower, two red and white rectangular daymarks. 9.1	Visible from 022° through E. and S. to 241°. Year round.
									Chart:2311

^{*} From CCG List of Lights, Buoys and Fog Signals corrected to Notices to Mariners Monthly Edition 7 of 2000.

I-1

Acadia Rock, C7/P207
Advance Reef, C2/P48
Agate Cove, C7/P13
Agate Island, C6/P68
Agate Point, C7/P7
Agawa Bay, C4/P102
Agawa Islands, C4/P106
Agawa Point, C4/P106
Agawa River, C4/P105
Agawa Rock, C4/P109
Aguasabon River, C6/P23
Ainslie Shoal, C2/P117
Albert Islands, C7/P215
Alexander Reef
(Cape Gargantua), C4/P1

(Cape Gargantua), C4/P136 Alexander Reef (Pie Island), C7/P244 Allouez Island, C5/P145 Almos Shoal, C6/P22 Alona Bay, C4/P85 Amberley Beach, C1/P134 Amethyst Bay, C7/P376 Amethyst Harbour, C7/P378 Amygdaloid Channel, C7/P133 Amygdaloid Island, C7/P133 Anderson Island, C7/P228 Andesite Island, C5/P41 Angelica Island, C6/P69 Anguros Island, C6/P106 Angus Islands, C7/P197 Anorthite Islet, C7/P186 Antelope Rock, C5/P44 Arabian Rock, C7/P227 Arbutus Rock, C1/P326 Ariel Island, C7/P96 Armour Harbour, C6/P64 Armour Island, C6/P64 Arno Island, C7/P95 Arthur Island, C7/P23 Ashburton Bay, C5/P146 Ausable River, north branch, C1/P69 Ausable River, west branch, C1/P55 Ayre Shoal, C7/P47

Bachand Island, C7/P25 Bacon Island, C7/P373 Baie du Doré, C1/P171 Bain Rock, C2/P100 Baker Rock, C7/P201 Bald Head, C4/P121 Baldhead River, C4/P123 Baptist Harbour, C1/P327 Baptist Island, C1/P326 Baptist Rock, C1/P326 Barbed Point, C3/P42 Barclay Islands (McKellar Harbour), C5/P147 Barclay Islands (Shaganash Island), C7/P50 Bare Point, C7/P283 Bare Summit, C5/P18 Barr Island, C6/P38 Barr Island Harbour, C6/P38 Barr Reef, C4/P117 Barrett Island, C4/P115 Barrett Reef, C1/P261 Barwis Rock [Powder Shoal], C6/P116

Batchawana Bay, C4/P49

Batchawana Bay (settlement), C4/P55

Batchawana Island, C4/P49 Batchawana River, C4/P57 Bateau Rock, C7/P121 Battle Island, C6/P45 Bayfield, C1/P96 Bayfield Channel, C3/P85 Bayfield Dike, C3/P86 Bayfield River, C1/P88 Bead Island, C6/P58 Bead Island Channel, C6/P58 Beament Island, C1/P255 Beament Island Passage, C1/P255 Beatty Cove, C4/P128 Beauvier Point, C4/P158 Beaver Island (Isle Royale), C7/P155 Beaver Island (Prince Bay), C7/P234 Beckie Island, C6/P139 Beetle Point, C6/P111 Beeton Point, C6/P164 Belanger Point, C2/P120 Belcher Reef, C1/P176 Belle Island, C7/P133 Bellevue Island, MI, C2/P152 Bennett Island, C7/P55 Bent Island, C7/P107 Big Bluff Point, C2/P104 Big Point, C3/P165 Big Shoal Cove, MI, C2/P158 Big Shoal, MI, C2/P158 Big Trout Bay, C7/P209 Bignell Point, C6/P55 Bill and Jim Islands, C6/P74 Birch Island (Flatland Harbour), C7/P253 Birch Island (Isle Royale), C7/P132 Birch Island (Nipigon Bay), C6/P72 Birch Point (Lake Huron), C2/P46 Birch Point (St. Marys River), C3/P174 Birch Point (St. Marys River), C3/P176 Birch Point Course, C3/P176 Black Bay, C7/P101 Black Point, C2/P85 Black Point, C2/P110 Black River Canal, MI, C1/P16 Black Rock (Lake Huron), C2/P59 Black Rock (Michipicoten Island), C5/P41 Black Rock

Black Sturgeon River, C7/P120 Black Summit, C2/P10 Black's Wharf, C7/P26 Blacks Point, C1/P100 Blair Rock, C7/P46 Blaisdell Island, C7/P38 Blake Point (Duck Islands), C2/P105 Blake Point (Isle Royale), C7/P127 Blanket Island, C6/P91 Blind Channel, C6/P72 Blind Channel, C6/P166 Blondin Island, C5/P119 Blue Point, C1/P37 Boardman Rock, C7/P35 Boathouse Bay, C2/P130 Boiler Beach, C1/P141 Bonamie Cove. C5/P70

Bonner Head, C5/P23

Boom Point, C2/P129

Boone Island, C6/P99

(Thompson Channel), C5/P142

Black Rock Point, C3/P42

Booth Island, C7/P154 Borden Island, C7/P30 Bottle Cove, C5/P150 Bottle Point, C5/P150 Bottle Point, C6/P13 Boulton Reef, C5/P109 Boundary Islands, C7/P207 Bourbonnais Island, C7/P39 Bowes Island, C6/P6 Bowes Island (Lake Huron), C1/P228 Bowman Island, C6/P67 Boyer Reef, C1/P176 Bradley Harbour, C1/P303 Bradshaw Island, C7/P224 Bread Rock, C6/P84 Breeders, The, C5/P44 Brodeur Island, C7/P21 Bruce Beach, C1/P141 Bruce Nuclear Power Development, C1/P168 Brulé Harbour, C4/P155 Brulé Hill, C4/P154 Brulé Point, C4/P154 Brûlé Shoal, C6/P130 Bruneau Point, C7/P50 Brush Point Course, C3/P173 Brush Point, MI, C3/P167 Buck Islands, C7/P375 Buckeye Shoal, C2/P53 Buller Reef, C2/P82 Bullers Island, C6/P54 Burke Island, C1/P242 Burke Shoal, C7/P270 Burnet Island, C6/P64 Burnt Island (Lake Huron), C2/P113 Burnt Island (Nipigon Bay), C6/P171 Burnt Island (Silver Islet), C7/P176 Burnt Island Harbour, C2/P115 Burnt Point, C6/P127 Burpee Rock, C7/P44 Burtch Creek, MI, C1/P17

Butch Bank, C5/P35

C Line Dock, C3/P58
C.P.R. Island, C5/P109
Caldwell Island, C7/P232
Caldwell Point, C7/P231
Caldwell Shoal, C7/P231
Campbell Island, C7/P243
Campbell Reef, C1/P318
Canadian National Railway Swing

Bridge, C7/P317 Canoe Rocks, C7/P133 Cantin Shoal, C1/P85 Cap Chaillon, C4/P150 Cape Gargantua, C4/P142 Cape Hurd, C1/P328 Cape Ipperwash, C1/P49 Cape Nano, C6/P127 Cape Rock, C4/P143 Cape Victoria, C6/P15 Cargill Island, C7/P58 Caribou Island (Isle Royale), C7/P137 Caribou Island (Lake Superior), C5/P31 Caribou Island (Thunder Bay), C7/P380 Caribou Point, C6/P170 Carney Rock, C7/P90 Carroll Wood Bay, C2/P83

Carter Bay, C2/P52

Carter Rock, C2/P126 Cartwright Island, C7/P35 Cascade Falls, C5/P80 Castilian Shoal, C2/P137 Cat Islands, C6/P83 Cataract Rock, C1/P318 Cavalier Island, C1/P255 Cave Harbour, C5/P95 Cavers Bay, C6/P121 Cebina Island, C6/P59 Cedar Island, C6/P73 Cedar Island, C6/P161 Cedar Point, C1/P45 Chalfant Island, C4/P145 Channel Island, C6/P87 Channel Island, C6/P96 Channel Point [Devils Horn], C2/P129 Chantry Island, C1/P192 Chantry Shoal, C1/P200 Chapleau Island, C7/P30 Charlton Bay, C2/P44 Chase Rock, C6/P25 Chiefs Point, C1/P221 Chiefs Point Bay, C1/P227 Chimney Reefs, C1/P256 Chipman Rock, C7/P382 Chippewa Falls, C4/P59 Chippewa Harbor, C7/P143 Chippewa Park, C7/P368 Chippewa River, C4/P59 Chisholm Shoal, C2/P49 Christina Bay, C2/P110 Chummy Bank, C5/P35 Chummy's Harbour, C6/P114 Chummy's Island, C6/P115 Church Point, C7/P178 Cigar Island, C1/P229 Cinder Point, C2/P129 Clark Bay, C7/P28 Clark Island, C7/P90 Clark Reef, C1/P135 Clavet Bay, C7/P385 Clavet Point, C7/P385 Clay Shoal, C6/P138 Clergue Island, C4/P170 Cloud Bay, C7/P211 Cloud Islands, C7/P210 Cloud River, C7/P212 Coal Oil Point, C1/P320 Coates Island, C7/P45 Cobinosh Island, C6/P41 Cockburn Island, C2/P129 Cohen Rock, C7/P227 Cold Water Creek, C7/P116 Coldwell, C5/P140 Collingwood Bay, C6/P80 Condon Island, C6/P134 Cone Island, C7/P201 Confiance [Steamboat] Island, C6/P88 Conglomerate Bay, C7/P142 Conmee Point, C7/P373 Cook Point, C6/P149 Cooper Point, C6/P132 Copp Rock, C7/P97 Copper Harbour, C6/P6 Copper Island, C6/P36 Copper Point, C7/P103 Coppermine Point, C4/P34

Corbeil Point, C4/P49 Corisande Bay, C1/P318 Cornet Ground, C1/P273 Corsdu Reef, C1/P251 Cosgrave Bay, C7/P220 Cotton Cove, C5/P30 Course 10, C3/P54 Course 2, C3/P80 Course 3, C3/P80 Course 4, C3/P78 Course 4 (downbound), C3/P72 Course 5, C3/P70 Course 5 (downbound), C3/P73 Course 6 (downbound), C3/P74 Course 6 (upbound), C3/P65 Course 7 (downbound), C3/P76 Course 7 (upbound), C3/P62 Course 8 (downbound), C3/P77 Course 8 (upbound), C3/P60 Course 9, C3/P55 Coutlee Island, C7/P24 Cove Island, C2/P13 Cow Creek, C1/P41 Cowie Point, C7/P84 Coyle Point, C3/P60 Cozens Cove, C5/P37 Cozens Harbour [Cozens Cove], C5/P37 Crab Island Shoal, C3/P38 Craig Rock, C7/P201 Craigs Pit, C5/P114 Cranberry Island (Lake Huron), C1/P228 Cranberry Island (Lake Superior), C7/P90 Crane Island, C5/P64 Crichton Island, C6/P135 Crisp Point, C4/P21 Cross Rocks, C7/P177

Dack Spit, C1/P176 Dacres Rock, C6/P75 Dacres Rock, C6/P161 Dahl Shoal, C6/P4 Dampier Cove, C5/P92 Dane Island, C1/P290 Davieaux Island, C5/P42 Davies Island, C7/P28 Davis Island, C5/P68 Dawson Bay, C7/P248 Daylight Point, C6/P90 De Tour Passage, C3/P35 De Tour Reef, C3/P36 De Tour Reef Light, C3/P36 De Tour Shoal, C3/P37 De Tour Village, MI, C3/P40 Dead River, C6/P122 Deadman Island, C7/P247 Deadman's Island, C1/P242 Deadman's Point, C2/P83 Dean Spit, C2/P68 Deans Bay, C2/P69 Delaney Island, C7/P112 Desert Point, C2/P96 Detention Island, C5/P135 Devil Island, C7/P221 Devil's Warehouse Island, C4/P136

Devils Horn, C2/P129

Crow Point, C6/P120

Crystal Bay, C7/P232

Cumberland Point, C7/P154 Current River, C7/P299 Dewar's Creek, C2/P54 Dewey Point, C1/P82 Dixon Island, C4/P136 Doc Hewson Bay, C2/P141 Dog Harbour, C5/P13 Dog River, C5/P12 Dominion Bay, C2/P70 Dominion Point, C2/P68 Dorcas Bay, C1/P321 Doré Bay, C5/P10 Doré Point, C5/P10 Doré River, C5/P10 Dorion, C7/P115 Dorion Landing, C7/P115 Douglas Point, C1/P168 Drake Shoal, C1/P256 Drake Shoal Passage, C1/P258 Dreadnought Island, C7/P80 Druid Rock, C6/P123 Drummond Island, MI, C2/P145 Duck Islands, C2/P86 Duncan Bay, C7/P134 Duncan Cove, C6/P66 Dunmore Island, C6/P50 Dunn Island, C2/P120 Dupuis Island, C6/P7 Dupuis Point, C6/P66

Eagle Harbour, C1/P321 Eagle Point, C1/P318 East Belanger Bay, C2/P119 East End light, C5/P22 East Reef, C2/P134 East Sand Bay, C5/P38 Edmonds Island, C6/P6 Edna Point, C2/P110 Edward Harbour, C7/P93 Edward Island, C7/P71 Ella Islet, C4/P127 Elson Rock, C7/P55 Enterprise Bay, C7/P109 Entrance Island, C4/P155 Espanore Island, MI, C2/P154 Eva Islands, C7/P227 Evelyn Rocks, C7/P36 Everens Point, C3/P55 Everett Reefs, C2/P56

False Detour Channel, C2/P145 False Dog Harbour, C5/P14 False Ganley Harbour, C5/P63 False Harbour, C5/P40 Fawcett Island, C4/P136 Ferguson Point, C1/P297 Finch Head, C6/P59 Finger Point, C7/P203 Finlander Reef, C7/P158 Finlay Bay, C7/P98 Finlay Point, C7/P98 Fire Hill Bay, C6/P134 Fish Harbour, C5/P95 Fisher Bay, C2/P85 Fisher Rock, C6/P55 Fisherman Reef, C7/P153 Fishermans Home, C7/P150 Fishing Islands, C1/P5 Fishing Islands, C1/P221 Fitzsimmons Rocks, C5/P147 Fitzwilliam Island, C2/P9

Five Finger Bay, C7/P133 Five Foot Reef, C7/P127 Five Mile Point, C6/P140 Flatland Harbour, C7/P253 Flatland Island, C7/P243 Flatland Reef, C7/P251 Fluor Island, C6/P73 Fluor Island, C6/P161 Foote Island, C7/P221 Ford Island, C6/P163 Forest, C1/P48 Fort Gratiot Light, C1/P15 Fort William, C7/P349 Foster Island, C5/P142 Foster Point, C7/P98 Foxhound Rock, C7/P113 Frank Rock, C6/P4 Fraser Point, C6/P64 Frechette Bank, C2/P78 Frechette Bay [Mac's Bay], C2/P78 Frechette Point, C3/P80 Fréchette Point, C2/P78 Fred Shoal, C5/P117 Frenchman Bay, C1/P214 Frenchman Point, C1/P214 Frog Island, C6/P171 Frood's Harbour, C2/P37 Froude Bay [Frood's Harbour], C2/P37 Frying Pan Island, C3/P39 Frying Pan Shoal, C3/P39

Gaffney Point, C3/P43 Ganley Harbour, C5/P60 Ganley Island, C4/P107 Ganley Rock, C4/P116 Garden Island, C1/P292 Gargantua Bay, C4/P129 Gargantua Harbour, C4/P129 Gargantua Island, C4/P129 Gaspesia Shoal, C2/P84 Gatacre Point, C2/P76 Gauley Bay, C1/P297 Genesta Bank, C2/P47 George Point, C7/P86 Ghegheto Island, C1/P256 Gig Point, C2/P14 Gilphie Reef, C1/P309 Giraoud [Bullers] Island, C6/P54 Girard Rock, C7/P39 Girouard Point, C2/P117 Glenlyon Shoal, C7/P149 Glycerine Rock, C2/P43 Goderich, C1/P106 Goderich Harbour, C1/P102 Goose Point, C2/P82 Gordon Island, C7/P27 Goulais Bay, C4/P41 Goulais Mission, C4/P43 Goulais Point, C4/P41 Goulais River, C4/P41 Gourdeau Island, C7/P37 Grace Harbor, C7/P154 Grace Island, C7/P154 Grand Bend, C1/P69 Grand Point, C7/P257 Grand Reef, C7/P257 Granite Island, C7/P111 Grant Point, C6/P123 Grantham Shoal, C2/P23

Gravel Bay, C6/P121 Gravel Island, C7/P90 Gravel Island, MI, C2/P155 Gravel Point (Lake Huron), C2/P97 Gravel Point (Nipigon Bay), C6/P122 Gravel River, C6/P122 Great Duck Island, C2/P90 Grebe Point, C6/P51 Grebe Point, C6/P111 Green [Black] Point, C2/P85 Green [Black] Point, C2/P110 Green Island (Black Bay), C7/P108 Green Island (Isle Royale), C7/P133 Green Island (Michipicoten Island), C5/P44 Greene Island, C2/P122 Greene Island Harbour [Quarry Bay], C2/P121 Greenough Bank, C1/P299 Greenough Harbour, C1/P300 Greenough Point, C1/P273 Greenstone Point, C7/P248 Grenfell Rock, C7/P36 Grey Island, C7/P95 Griffon Reef, C4/P100 Grindstone Point, C4/P152 Gros Cap, C4/P23 Gros Cap Reefs, C4/P24 Grotto Point, C6/P52 Gull Islands, C7/P129 Gull Rock, C2/P96 Gull Rocks, C7/P158 Gunn Point, C1/P163

Guse Point, C5/P143

Haiste Rocks, C6/P14 Hale Rock, C5/P117 Ham Point, C7/P112 Hamilton Islands, C7/P201 Hammond Point, C2/P49 Hanbury Island, C7/P39 Hardscrabble Island, C7/P89 Hare Island, C7/P193 Hare Island Reef, C7/P193 Harlem Reef, C7/P148 Harmony [Chippewa] River, C4/P59 Harmony Bay, C4/P58 Harrison Shoal, C1/P256 Harry Island, C6/P114 Harty Island, C7/P227 Harty Rock, C7/P58 Hat Island, C7/P145 Hattie Rock, C1/P256 Havilland Bay, C4/P60 Hawk Island (Agate Point), C7/P14 Hawk Island (Isle Royale), C7/P131 Hawken Island, C7/P229 Hawkins Island, C5/P119 Hawks Nest Point, C1/P230 Hay Point, C1/P52 Head, The, C7/P150 Healey Island, C6/P96 Helen Island, C7/P28 Hensley [Sand] Bay, C2/P82 Heron Bay, C5/P109 Heron Bay (settlement), C5/P112 Herron Point, C7/P14 Herschel Island, C2/P148 Hibbard Bay, C4/P69

Hibbard Rock, C4/P70 Highland Glen Conservation Area, C1/P44 Hill Point, C7/P133 Hogs Back Reef, C2/P89 Holden Shoal, C6/P137 Holdridge Shoal, MI, C2/P156 Honeymoon Island, C7/P382 Hoorigan Bay, C7/P385 Hoorigan Point, C7/P385 Hope Island (Quebec Harbour), C5/P42 Hope Island (St. Ignace Island), C6/P64 Hopkins Bay, C1/P324 Hopkins Harbor, C7/P147 Hopkins Point, C1/P324 Horseshoe Bay, C2/P104 Horseshoe Cove, C7/P92 Horseshoe Reef, MI, C2/P157 Horton Point, C1/P161 Howdenvale, C1/P248 Hughes Island, C7/P42 Hughes Point, C6/P134 Hughson Bay, C2/P52 Hummock, The, C5/P35 Hungerford Point, C2/P21 Huntress Reef, C1/P315 Hurkett, C7/P117 Hurkett Cove, C7/P117 Huron Bay, MI, C2/P155 Hursley Island, C4/P139 Hyndman Bay, C2/P142

le Parisienne, C4/P28 Indian Harbour, C4/P145 Indian Island (Fishing Islands), C1/P228 Indian Island (Maitland River), C1/P124 Indian Point, C1/P241 Inkster Rock, C2/P29 Inner Duck [Thibault] Island, C2/P87 Inverhuron Bay, C1/P164 Inverhuron Provincial Park, C1/P166 Irish Harbour, C1/P296 Iroquois Rock, C7/P213 Irvine Island, C6/P73 Irwin Rock, C7/P44 Island Harbor, MI, C2/P154 Island No. 1, C3/P82 Island No. 3, C3/P81 Isle Royale, C7/P122 Isle Royale National Park, C7/P124 Ivan Point, C2/P110

Jack Rock, C6/P14 Jackfish Bay, C6/P15 Jackfish Channel, C6/P4 Jacknife Bridge, C7/P315 Jackson Island, C4/P40 James Street Swing Bridge, C7/P317 Jarvis Bay, C7/P234 Jarvis Island, C7/P222 Jarvis Point, C7/P233 Jarvis River, C7/P234 Jarvis Rock, C7/P222 Jean Pierre Point, C7/P40 Jellicoe Cove, C5/P123 Jenkins Point, C2/P52 Jennie Graham Shoal, C2/P103 Jobin Island, C7/P28 Johns Island, C7/P154

Johnson Point, C3/P55
Johnston [Johnston's] Harbour, C1/P314
Johnston [Johnston's] Point, C1/P314
Johnston's Harbour, C1/P314
Johnston's Point, C1/P314
Johnston's Point, C1/P314
Jones Shoal, C2/P120
Jordan Island, C4/P138
Josephine Shoal, C6/P69
Jossie Island, C6/P139
Juno Point, C1/P306

Kam Entrance, C7/P306 Kam Turning Basin, C7/P306 Kama Bay, C6/P132 Kama Point, C6/P132 Kaministiquia River, C7/P306 Kate Rock, C6/P7 Keating Rock, C5/P109 Keefer Point, C7/P248 Keith Rocks, C6/P25 Kemp Shoal, C7/P56 Kent Islands, C7/P376 Kettle Point, C1/P49 Kettle Point Reef, C1/P49 Kidd Point, C7/P99 Kincardine, C1/P145 Kingcome Island, C6/P88 Kipling Reef, C2/P89 Kitchener Island, C2/P146 Kitty Shoal, C2/P103 Knife Islands, C1/P287 Knobel Point, C7/P382 Kolfage Island, C1/P261

L'anse à la Bouteille, C5/P150 La Grange Island, C6/P137 Labrador Reef, C2/P120 Lake Nicolet, C3/P65 Lake Superior Provincial Park, C4/P103 Lakeside Shoal, C6/P123 Lamb Island, C6/P157 Lambert Island, C7/P378 Lambert Shoal, C1/P200 Lambton Cove [Copper Harbour], C6/P6 Larry Rock, C2/P103 Larson Island, C6/P115 Lasher Island, C7/P30 Laura Grace Rock, C7/P207 Lawson Island, C6/P14 Leach Island, C4/P124 Leadman Islands, C6/P4 Leask Bay, C2/P44 Leask Point, C2/P44 Leason Bay, C2/P37 Lee Bank, C1/P200 Lefebvre Island, C7/P373 Legault Island [Legault's Rock], C6/P111 Legaults Rock, C6/P111 Leigh Bay, C3/P168 Lennox Rock, C7/P78 Leon Island, C6/P59 Lighthouse Island, C5/P33 Lime Island, C3/P47 Lime Island Channel, C3/P49 Lincoln Shoal, C1/P271 Little Eagle Harbour, C1/P320 Little Gibraltar Rock, C7/P93 Little Lake Harbour, C6/P90 Little Nick Rock, C6/P17

Little Pike Bay, C1/P276 Little Pike Point, C1/P278 Little Pine Tree Harbour, C1/P305 Little Rapids Cut, C3/P80 Little Red Bay, C1/P245 Little Trout Bay, C7/P211 Lizard Islands, C4/P117 Locke Point, C7/P133 Logie Rock, C1/P177 Lonely Bay, C2/P69 Lonely Island, C1/P227 Lonely Point (Manitoulin Island), C2/P69 Lonely Point (Oliphant), C1/P227 Longcroft Island, C6/P69 Loon Harbour, C7/P31 Lord Stanley Rock, C7/P201 Loscombe Bank, C1/P172 Lougheed Reef, C2/P68 Lougheeds Point, C2/P69 Louise Bay, C7/P103 Lower Course 8, C3/P52 Lowrey Island, C7/P20 Lucas Island, C2/P11 Lurgan Beach, C1/P134 Lyal Island, C1/P273 Lyal Reef, C1/P271 Lynn Point, C2/P126

Macauley Spit, C2/P88 MacGregor Cove, C4/P98 MacGregor Point, C1/P174 MacGregor Point Provincial Park, C1/P175 MacInnes Point, C6/P125 Mackenzie Bay, C7/P373 Mackenzie River, C7/P373 MacKinnon Bank, C4/P148 MacKinnon Point, C6/P130 Macoun Island, C7/P46 Macpherson Point, C1/P168 Mac's Bay, C2/P78 Mad Reef, C1/P286 Magee Island, C7/P229 Magee Rock, C7/P54 Magnet Channel, C7/P67 Magnet Island, C7/P70 Magnet Point, C7/P7 Magnet Point, C7/P70 Magnetic Island, C2/P139 Magnetic Reefs, C2/P134 Main Entrance (Thunder Bay), C7/P286 Main Station Island, C1/P222 Maitland River, C1/P102 Majestic Rock, C7/P169 Malcolm Reef, C1/P176 Malone Bay, C7/P145 Malone Island, C7/P145 Maloney Shoal, C7/P165 Mamainse Harbour, C4/P74 Mamainse Island, C4/P72 Mamainse Point, C4/P72 Manitoba Reef, C2/P96 Manitoba Shoal, C5/P119 Manitoulin Island, C2/P18 Manuel Rock, C7/P18 Maple Island, C4/P46

Marathon, C5/P126

Marcil Bay, C7/P18

Marin Island, C7/P203

Martin's Point, C1/P129 Marvin Island, C7/P169 Mary Ellen [Ham] Point, C7/P112 Mary Harbour, C7/P372 Mary Island, C7/P372 Mary Shoal, C2/P103 Mayflower Island, C2/P24 McCaigs Hill, C2/P129 McCallum Island, C1/P251 McCargoe Cove, C7/P132 McColl Island, C6/P6 McDonald Islands, C5/P143 McEachan Island, C7/P109 McGarvey Shoal, C6/P85 McGaw Point, C2/P27 McGhie Rock, C6/P163 McGinty Cove, C7/P158 McGreevy Harbour, C6/P6 McIntyre River, C7/P304 McKay Cove, C6/P111 McKay Rock, C2/P143 McKay Rocks, C5/P142 McKellar [South McKellar] Island, C7/P229 McKellar Harbour, C5/P146 McKellar Island, C7/P330 McKellar Point, C7/P211 McKellar River, C7/P330 McKim Bay, C2/P37 McMaster Point, C1/P290 McMillan Bank, C5/P35 McNab Harbour, C6/P63 McNab Peninsula, C6/P54 McNab Point (Lake Huron), C1/P189 McNab Point (Lake Superior), C7/P257 McQuaigs [McCaigs] Hill, C2/P129 McRae Point, C1/P161 McVicar Creek, C7/P299 Meade Island, MI, C2/P157 Meaux Shoal, C5/P119 Melancon Point, C7/P267 Melville Bay, C2/P70 Melville Point, C2/P70 Menagerie Island, C7/P149 Menekaunee Point, C4/P13 Methuen Reef, C2/P81 Mica Bay, C4/P82 Mica Shoal, C4/P80 Michael Bay [Michael's Bay], C2/P49 Michael Point [Michael's Point], C2/P48 Michael's Bay, C2/P49 Michael's Point, C2/P48 Michipicoten, C4/P176 Michipicoten Bay, C4/P159 Michipicoten Harbour, C4/P168 Michipicoten Island, C5/P21 Michipicoten River, C4/P178 Michipicoten River (settlement), C4/P181 Middle Duck Island, C2/P89 Middle Islands Passage, C7/P137 Middle Neebish Channel, C3/P65 Middle Reef, C2/P134 Middlebrun Bay, C7/P173 Middlebrun Channel, C7/P67 Middlebrun Channel, C7/P97 Middlebrun Island, C7/P173 Middlebrun Point, C7/P67 Miles Bay, C7/P87 Milton [Lonely] Point, C2/P69

Milton Bank, C1/P271 Milton Reef, C2/P68 Mink Bay, C7/P239 Mink Island, C7/P237 Mink Point, C7/P235 Mink Reef, C2/P124 Minnie Island, C6/P114 Minnie Reef, C4/P117 Miron Bank, C4/P124 Mirre Point, C3/P60 Misery Bay, C2/P78 Misery Point, C2/P81 Mission Hill, C4/P11 Mission Island, C7/P315 Mission Marshes, C7/P305 Mission Point, C3/P82 Mission River, C7/P338 Mission River Entrance, C7/P338 Mission River Turning Basin, C7/P338 Mississagi Strait, C2/P127 Moberly Bay, C6/P19 Moffat Strait, C6/P57 Monk Island, C7/P81 Monk Point, C2/P149 Monmouth Island, C5/P131 Montgomery Island, C7/P21 Montreal Channel, C7/P67 Montreal Channel, C7/P91 Montreal Island, C4/P99 Montreal River, C4/P89 Montreal Shoal, C4/P87 Mood Island, C7/P39 Mooley Island, C6/P50 Moon Island, C3/P76 Moonshine Island, C7/P227 Morn Harbour, C6/P110 Morn Point, C6/P48 Morrell Reef, C2/P83 Morrison Harbour, C5/P95 Mortimer Island, C6/P4 Moss Harbour, C6/P168 Moss Island, C6/P162 Moss Point, C5/P143 Mott Island, C7/P139 Mount Desor, C7/P122 Mount Gwynne, C6/P32 Mount McKay, C7/P265 Mount Premier [Premier Mountain], C5/P141 Mountain Ash Hill, C5/P11 Mountain Bay, C6/P123 Mud Bay (Lake Superior), C5/P99

Mountain Ash Hill, C5/P11
Mountain Bay, C6/P123
Mud Bay (Lake Superior), C5/P99
Mud Bay (Mississagi Strait), C2/P141
Munuscong Channel, C3/P62
Munuscong Lake, C3/P52
Murphy Harbour, C2/P77
Murphy Point, C2/P77
Murton Reef, C1/P271
Muskrat Island, C7/P239
Mutchmor Point, C2/P67
Mutton Shoal, C7/P270
Myles Bay, C1/P283
Mystery Island, C6/P72

Naomi Island, C7/P208 Naomikong Point, C4/P13 Narrows, The, C2/P37 Neebing River, C7/P304 Neebish Island, C3/P53 Nest Island (Shaganash Island), C7/P47 Nest Island (St. Ignace Island), C6/P65 Newash Point, C6/P68 Newcombe Rock, C6/P160 Newton Island, C7/P25 Nichols Cove, C5/P92 Nicol Island, C6/P97 Nicoll Shoal, C5/P143 Nine Mile River, C1/P130 Ninemile Point, C3/P78 Nipigon, C6/P154 Nipigon Bay, C6/P33 Nipigon River, C6/P149 Nipigon Strait, C6/P156 Nisbet Island, C7/P239 Nodoway Point, C4/P11 Noisy River, C4/P158 North Bank, C5/P32 North Entrance (Thunder Bay), C7/P286 North Government Island, C7/P137 North Gros Cap, C4/P23 North Reef, C2/P134 North Sandy Island, C4/P31 North Trout Creek, C6/P148.1 Northwest Banks, C5/P35

Number 10 Island, C7/P52

Nuttal Point, C6/P121

Nuttall Island, C7/P107

Oakes Cove, C4/P163 Ogilvy Point, C5/P108 Oiseau Bay, C5/P91 Old Daves Harbour, C5/P76 Old Dumping Ground Shoal, C7/P270 Old Fort St. Joe Point, C3/P34 Old John Rock, C7/P112 Old Woman Bay, C4/P152 Old Woman's River (Lake Huron), C1/P282 Old Woman River (Lake Superior), C4/P153 Oldman Shoal, C6/P121 Oliphant, C1/P226 Osler Bay, C7/P94 Ossifrage Island, C4/P84 Otter Cove (Otter Head), C5/P78 Otter Cove (Shesheeb Bay), C7/P17 Otter Head, C5/P71 Otter Island (Otter Head), C5/P72 Otter Island (Shesheeb Bay), C7/P16 Outan Island, C6/P131

Palette Island, C7/P376 Pancake Bay, C4/P65 Pancake Point, C4/P65 Pancake Shoal, C4/P33 Pannikin Shoal, C4/P138 Papoose Islands, C7/P371 Paps, The, C7/P49 Paradise Island, C6/P67 Parisienne Shoal, C4/P30 Parker Island, C1/P279 Parker Landing, C1/P279 Partridge Point, C3/P145

Outan Island, C6/P173

Owen Island, C7/P203

Owl Island, C6/P67

Outer Duck Island, C2/P100

Outer Pancake Shoal, C4/P33

Passage Island, MI, C7/P128 Pâté, Le, C7/P194 Pâté, Le, C7/P245 Paterson Rocks, C7/P44 Patterson Island, C6/P4 Pays Plat, C6/P108 Pays Plat Bay, C6/P106 Pays Plat River, C6/P108 Pearl River, C7/P106 Pearson Island (Lake Huron), C2/P120 Pearson Island (Lake Superior), C4/P136 Peerless Island, C4/P136 Penaall [Pendall] Point, C1/P321 Pendall Point, C1/P321 Pendills Bay, C4/P12 Pendills Creek, C4/P12 Penetangore River, C1/P145 Peninsula Harbour, C5/P119 Peninsula, The, C5/P119 Perkwakwia Point, C4/P161 Perley Island, C7/P43 Perry Bay, C7/P186 Perry Point, C7/P378 Petits Ecrits, Les, C6/P30 Pic Island, C5/P115 Pic River, C5/P100 Pie Island, C7/P194 Pie Island, C7/P245 Pigeon Bay, C7/P203 Pigeon Point, Minnesota, C7/P203 Pigeon River, C7/P206 Pike Bay, C1/P262 Pike Point, C1/P260 Piledriver Shoal, C6/P131 Pilot Harbour, C5/P19 Pine Bay, C7/P208 Pine River, C7/P208 Pine Tree Harbour, C1/P307 Pine Tree Point, C1/P310 Pinery Provincial Park, C1/P68 Pinnacle Rock, C7/P210 Pipe Island, C3/P43 Pipe Island Course, C3/P48 Pipe Island Shoal, C3/P43 Pipe Island Twins, C3/P43 Pipe River, C5/P59 Playter Harbour, C5/P96 Pleasant Harbour (Lake Huron), C1/P304 Pleasant Harbour, C7/P15 Pleasant Point, C1/P303 Point Anderson, MI, C2/P154 Point aux Frenes, C3/P51 Point Clark, C1/P134 Point De Tour, C3/P36 Point Edward, C1/P10 Point Farms Provincial Park, C1/P128

Point Farms Provincial Park, C1/P1: Point Houghton, C7/P148
Point Iroquois, C4/P11
Point Iroquois Shoals, C3/P179
Point Iroquois, MI, C3/P179
Point Isacor, C5/P18
Point Maurepas, C5/P22
Point Porphyry, C7/P71
Pointe à la Gourganne, C6/P169
Pointe aux Chenes, C3/P173
Pointe aux Mines, C4/P83
Pointe aux Pins, C3/P167
Pointe aux Pins Bay, C3/P168

Pointe aux Pins Course, C3/P167 Pointe La Canadienne, C5/P69 Pointe Louise, C3/P171 Pointe Louise Channel, C3/P171 Pointe Louise Turn, C3/P171 Pope Point, C6/P66 Poplar Beach, C1/P141 Porcupine Point, C1/P317 Porcupine Reef, C1/P318 Porphyry Island, C7/P71 Porphyry Reef, C7/P75 Port Albert, C1/P130 Port Arthur, C7/P349 Port Coldwell, C5/P136 Port Elgin, C1/P178 Port Franks, C1/P61 Port Franks Conservation Area, C1/P65 Port Huron, MI, C1/P10 Port Munro, C5/P131 Port of Thunder Bay, C7/P273 Portage Bay, C2/P74 Portage Point, C2/P76 Powder Islands, C6/P106 Powder Shoal, C6/P116 Poynter Rock, C7/P60 Prefontaine Island, C7/P227 Premier Mountain, C5/P141 Prince Bay, C7/P234 Providence Bay, C2/P55 Providence Bay (community), C2/P58 Providence Point, C2/P55 Provost Island, C6/P73 Puff Island, C6/P73 Pugsley Island, C7/P25 Pukaskwa Depot, C5/P68 Pukaskwa River, C5/P66

Quaid's Bay, C1/P129 Quarry Bay, C2/P121 Quarry Island, C6/P91 Quarry Point, C2/P120 Quebec Harbour, C5/P49 Quebec Mines, C5/P25 Quebec Rocks, C5/P28 Queens Point, C2/P85 Quigley Island, C6/P52

Pulpwood Harbour, C5/P97

Pulpwood Point, C2/P143

Purgatory Cove, C1/P271

Purvis Bank, C2/P126

Pyritic Island, C7/P167

Raber Bay, C3/P47 Raber Point, C3/P47 Randle Point, C5/P109 Rathbun Bay, C2/P52 Raven Island, C6/P69 Raymond Island, C6/P110 Red Bay, C1/P247 Red Dan Rock, C2/P45 Red Rock, C6/P143 Red Rock River, C4/P151 Red Sucker Cove, C5/P134 Redsucker Cove, C5/P59 Reid Island, C6/P62 Reid Point, C1/P251 Rex Island, C7/P34 Richardson Harbour, C5/P70 Richardson Island, C5/P70

Ricketts Harbour, C2/P140 Rickley Harbour, C2/P117 Ripple Reef, C1/P273 Roberts Bay, C2/P40 Robertson Islands, C7/P227 Robinson Bay, C7/P133 Roche Debout Channel, C7/P18 Roche Debout Point, C7/P14 Rock Harbor, C7/P136 Rock Harbor Lodge, C7/P138 Rock Island, C1/P46 Rock of Ages, C7/P152 Rolette Shoal, C6/P116 Rolland Rock, C7/P215 Ross Island, C7/P145 Rossport, C6/P105 Rossport Harbour, C6/P100 Rossport Point, C6/P93 Round Island (Lake Huron), C1/P256 Round Island (St. Marys River), C3/P50 Round Island Course, C3/P50 Rousseau Bank, C4/P71 Rousseau Island, C4/P68 Rowan Reef, C7/P253 Rowe Island, C4/P117 Rudderhead Point, C4/P49 Rudyard Reef, C2/P85 Russel Island, C2/P13

Ryan Point, C4/P145 Sailor's Encampment, C3/P59 St. Andrew Island, C7/P60 St. Ignace Harbour, C6/P60 St. Ignace Island, C6/P53 St. Ignace Island, C6/P167 St. Joe Islands, C6/P55 St. Marys Falls, C3/P96 St. Marys Falls Canal, C3/P97 St. Marys Falls Canal, C3/P103 St. Marys River, C3/P1 St. Marys River Vessel Traffic Service, C3/P25 St. Patrick Island, C6/P15 Salt Point, C4/P12 Sand Bay (Lake Huron), C2/P82 Sand Bay (Mississagi Strait), C2/P141

Russell Point, C7/P253

Sand Bay (Mississagi Strait), C2/ Sand Islands, C7/P161 Sand River, C4/P120 Sandy Islands, C4/P32 Santoy Bay, C6/P14 Sarah Island, C7/P29 Sarnia Yacht Club Basin, C1/P27

Sarrat Island, C6/P163 Saturn Rock, C1/P273 Sauble Beach, C1/P214 Sauble Beach (community), C1/P218

Sauble Falls, C1/P215 Sauble River, C1/P215 Saugeen River, C1/P203

Sault Ste. Marie (Canada) Canal, C3/P98 Sault Ste. Marie (Canada) Canal, C3/P132 Sault Ste. Marie, MI, C3/P152 Sault Ste. Marie, Ontario, C3/P140 Saunders Reef, C2/P79

Sawmill Point, C3/P74 Sawyer Bay, C7/P387 Scammon Cove, MI, C2/P157 Scammon Point, MI, C2/P157

Schafer Bay, C5/P29 Schaffner Rock, C7/P45 Schank Rock, C6/P75 Schooner Island, C7/P144 Schreiber, C6/P80 Schreiber Beach, C6/P80 Schreiber Channel, C6/P77 Schreiber Point, C6/P32 Schwitzer Shoal, C7/P260 Scimming Island, C7/P112 Scotch Bonnet Island, C1/P242 Scotch Thistle Point, C1/P302 Scotchie Reef, C2/P29 Scott Point, C1/P171 Scougall Bank, C1/P174 Scout Reef, C1/P242 Scoville Point, C7/P135 Seagram Rock, C7/P84 Seaman Reef, C2/P83 Seashell Rock, C1/P273 Senlis Shoal, C5/P119 Sewell Point, C5/P93 Shaganash Island, C7/P52 Shamrock Bank, C2/P76 Shangoina Island, C7/P166 Shelldrake River, C4/P15 Shesheeb Bay, C7/P18 Shesheeb Point, C7/P18

Ship Island (Michipicoten Island), C5/P44 Ship Island (Shangoina Island), C7/P168 Shrigley Bay, C2/P73

Shrigley Bay, C2/P/3 Shute Point, C1/P281 Sibert Point, C1/P306 Sibley Cove, C7/P175 Siesta Shoal, C4/P80 Silver Harbour, C7/P372 Silver Islet, C7/P163

Silver Islet (community), C7/P179

Simcoe Bank, C2/P59

Simcoe Point [Black Rock], C2/P59 Simon Point, C1/P300

Simons Harbour, C5/P86 Simpson Channel, C6/P109 Simpson Island, C6/P47 Simpson Island, C6/P109 Sims Bay, C2/P44 Sims Island, C2/P44 Sinclair Cove, C4/P112 Sinclair Island, C4/P110 Singleton Island, C7/P253 Siskiwit Bay, C7/P148 Sister Islands, C7/P238 Six Mile Point, C3/P78

Skin Island (Lake Huron), C2/P85 Skin Island (Lake Superior), C5/P119

Skinaway Island, C7/P161
Slate Islands, C6/P4
Sleeping Giant, The, C7/P188
Slipper Island, C7/P227
Sloan Bank, C7/P78
Sly Rock, C7/P238
Slyboots Rock, C5/P142
Small Lake Harbour, C6/P39
Smith [Station] Point, C2/P143
Smith Point, C2/P141
Smokehouse Island, C1/P228

Smokehouse Island, C1/P228 South Bay, C2/P37 South Baymouth, C2/P28

South Entrance (Thunder Bay), C7/P286

South Government Island, C7/P137 South Lizard Island, C4/P117 South McKellar Island, C7/P229 South Reef, C2/P134 South Sandy Island, C4/P31 Southampton, C1/P203 Southeast Bank, C5/P35 Southwest Bank, C5/P35 Sovereign Rock, C6/P159 Spain Island, C7/P30 Spar Channel, C7/P224 Spar Island (Nipigon Strait), C6/P160 Spar Island (Victoria Island), C7/P225 Spar Reef, C7/P225 Sparrow Shoal, C4/P124 Spider Reef, C6/P96 Square Bay, C2/P69 Squaw Bay (Black Bay), C7/P99 Squaw Island (Black Bay), C7/P99 Squaw Island (Lake Superior), C4/P148 Squaw Island (St. Marys River), C3/P44 Srigly [Shrigley] Bay, C2/P73 Stack Island, C5/P42 Stafford Rock, C2/P108 Stanton Island, C7/P40 Starke Point, C6/P75 Starke Point, C6/P161 Station Point, C2/P143 Steamboat Channel, C6/P87 Steamboat Island (Ile Parisienne), C4/P31 Steamboat Island (Nipigon Bay), C6/P88 Steamboat Island (Pie Island), C7/P247 Steel Mountain, C6/P13 Steevens Island, C2/P124 Stench Rock, C5/P90 Stillwater Bay, C6/P152 Stokes Bay, C1/P284 Stokes River, C1/P294 Stony Point (Lake Huron), C1/P52 Stony Point (Lake Superior), C4/P55 Stowe Point, C6/P166 Stribling Point, C3/P62 Sturgeon Bay (Flatland Island), C7/P241 Sturgeon Bay (Zeolite Point), C7/P39 Sturgeon Island, C7/P240 Sturgeon Point, C7/P240 Sucker Island, C7/P232 Sugar Island, C3/P53 Sugarloaf Hill, C7/P268 Sugarloaf, The, C7/P225 Sullivan Island, C5/P142 Sunday Harbour, C6/P9 Superior Shoal, C5/P8 Swallow River, C5/P83 Swan Rock, C7/P227 Swede Island, C7/P33 Sweetland Island, C7/P35 Sweets Point, C3/P46

Tahquamenon Bay, C4/P13 Tahquamenon River, C4/P14 Talbot Island, C6/P69 Tamarack Island, C1/P292 Taylor Reef, C2/P79 Tee Harbour, C7/P187

Sybil Island, C7/P77

Teed Shoal, C6/P15 Telegraph Rock, C4/P128 Temple Rock, C7/P380 Terrace Bay, C6/P22 Terrace Bay (settlement), C6/P28 Terry Point, C1/P314 Theano Point, C4/P83 Thibault Island, C2/P87 Thibault Shoal, C2/P87 Thistle Reef, C2/P74 Thomas Bay, C2/P23 Thomas Point, C2/P25 Thompson Channel, C5/P142 Thompson Island (Isle Royale), C7/P154 Thompson Island (Thunder Bay), C7/P228 Thorne Shoal, C6/P62 Thunder Bay, C7/P190 Thunder Bay (City), C7/P349 Thunder Cape, C7/P188 Tiger Island, C7/P219 Tiger Rock, C7/P219 Timber Bay, C2/P54 Timber Bay Shoal, C2/P53 Tip Top Mountain, C5/P85 Tisdall Island, C6/P73 Tobin Harbor, C7/P135 Todd Harbor, C7/P130 Todman Reef, C2/P24 Tolmie Reef, C1/P143 Tracy Shoal, C6/P42 Trapper Harbour, C5/P84 Tremblay Island, C6/P73 Triangle Harbour, C5/P81 Trowbridge Island, C7/P170 Tunnel Bay, C6/P19 Tunnel Island, C7/P61 Turtle Head, C7/P194 Tvrwhitt Island, C7/P60

Uncle Bobs Bank, C5/P117 University [Dog] River, C5/P12

Tyson Island, C1/P251


Vein Island, C6/P44 Vert Island, C6/P129 Victoria Bay, C6/P21 Victoria Cove, C7/P215 Victoria Island, C7/P215 Vidal Shoals, C3/P162 Vidal Shoals, C3/P162 Vigilant Rock, C2/P23 Vimy Island, C1/P229 Volunteer Spit, C2/P45 Vrooman Islands, C4/P98

Wadena Shoal, C4/P136 Wagosh Bay, C2/P143 Wagosh Reef, C2/P143 Waiska Bay, MI, C3/P177 Walker Point, C2/P45 Walkhouse Bay, C2/P85 Walkhouse Point, C2/P84 Wallace Rock, C2/P30 Wanderer Shoal, C1/P273 Warner Bay, C1/P323 Warner Point, C1/P322 Warp Bay, C4/P137 Washington Harbor, C7/P154 Washington Island, C7/P154 Watson Reefs, C3/P43 Wawa, C4/P176 Welcome Islands, C7/P258 Welcome Shoal, C7/P258 Wells Shoal, C1/P271 Welsh Bank, C1/P174 West Anguros Island, C6/P106 West Banks, C5/P35 West Belanger Bay, C2/P119 West End Island, C5/P46 West Neebish Channel, C3/P71 West Patch, C5/P35 West Reef, C2/P134 West Sand Bay, C5/P40 Western Duck Island, C2/P105 Western Duck Reef, C2/P106 Westfort Turning Basin, C7/P306 Wheat Bin, The, C5/P65 Wheeler Reef, C2/P146 Whelan Shoal, C6/P62 Whiskey Island, C6/P91 Whiskey Point, C4/P34 Whiskey Rock, C4/P66 Whisky Island, C1/P228 Whiskyjack Point, C7/P368 Whitefish Bay, C4/P8 Whitefish Island, C1/P229 Whitefish Point, C4/P19 Whitefish Point Harbor, C4/P16 Whitney Bay, MI, C2/P152 Wickham Bay, C6/P60 Wiedman's Island, C5/P78 Wild Goose Point, C7/P371 Wilde Island, C4/P136 Wiley Point, C7/P253 Willard Island, C6/P73 Wilson Channel, C6/P42 Wilson Island, C6/P37 Wilson Island, C6/P87 Wilson Island Harbour, C6/P40 Winston Point, C6/P81 Wolf River, C7/P116 Woodbine Harbour, C6/P50 Worthington Bay, C6/P31 Wright Island, C7/P145

Yeo Island, C2/P10 Youell Island, C1/P323 Ypres Point, C5/P119

Wright Point, C1/P127

Zealand Spit, C7/P242 Zeolite Bay, C7/P39 Zeolite Point, C7/P39 Zinkan Island, C1/P310

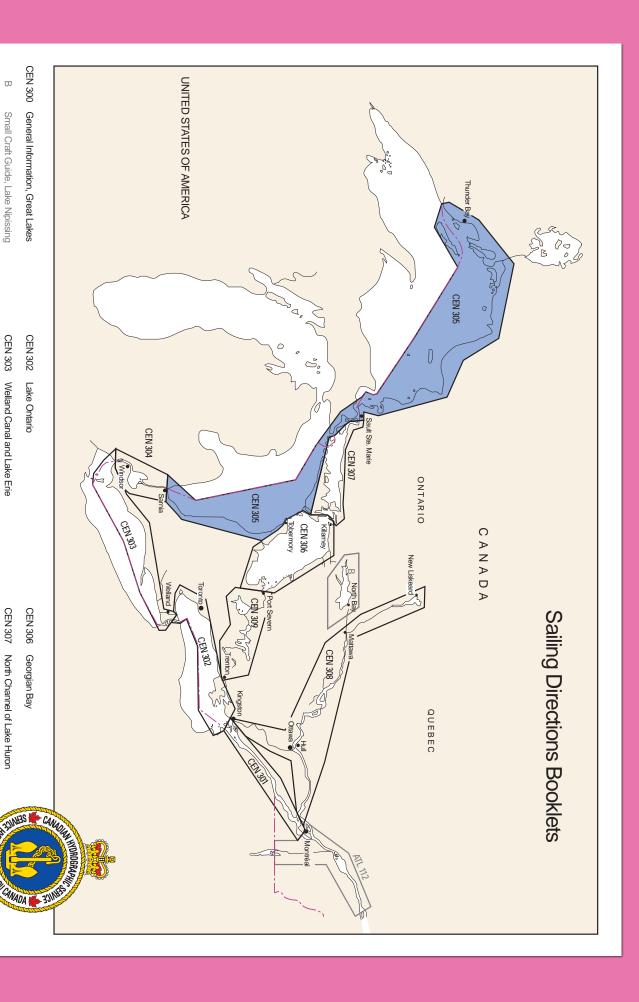

ATL 112

St. Lawrence River, Cap-Rouge to Montréal and Rivière Richelieu

CEN 304

Detroit River, Lake St. Clair, St. Clair River

CEN 308 Rideau Canal and Ottawa River
CEN 309 Trent-Sevem Waterway

CEN 301 St. Lawrence River, Montréal to Kingston

CEN 305 Lake Huron, St. Marys River, Lake Superior